



Target

Light is not just a medium that provides brightness. We pursue the ideal light in the suitable place. We combine design and technology to create high quality lighting solutions for diverse venues. Experience, knowledge, and cutting-edge expertise, supported by trusted professional relationships, are applied every day with associated technologies to create products of maximum efficiency.

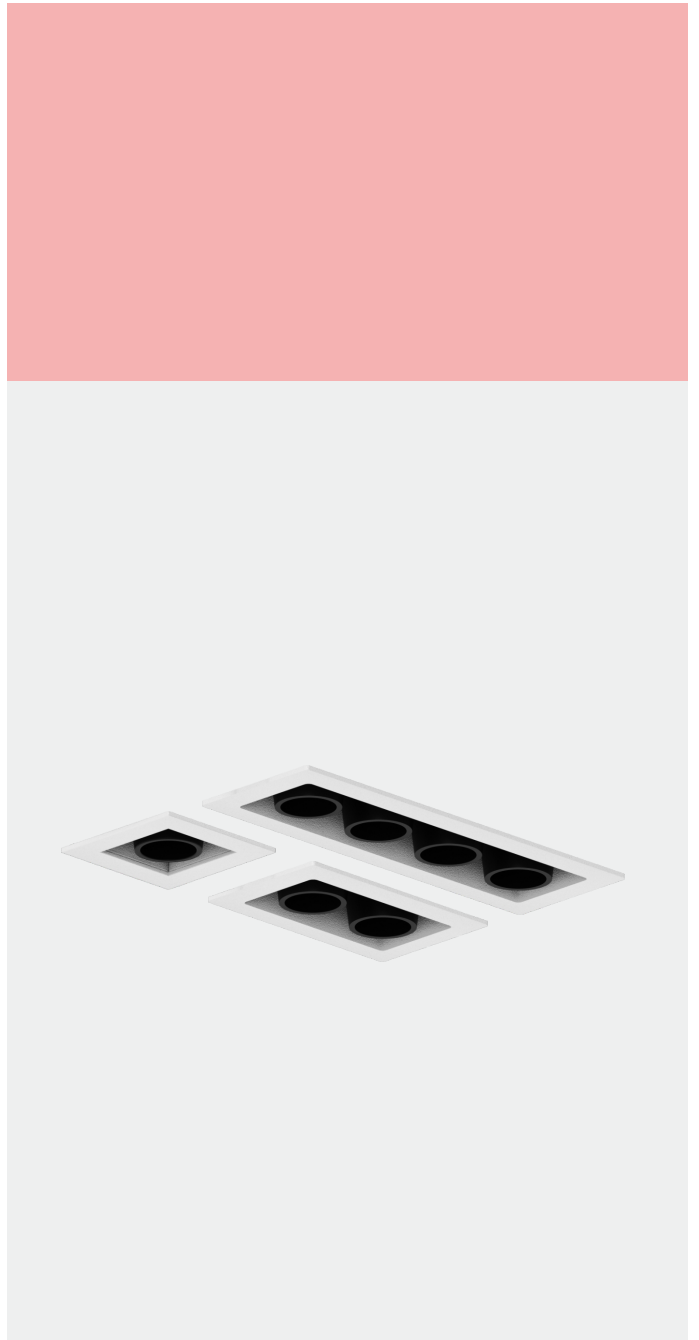


Target

40mm

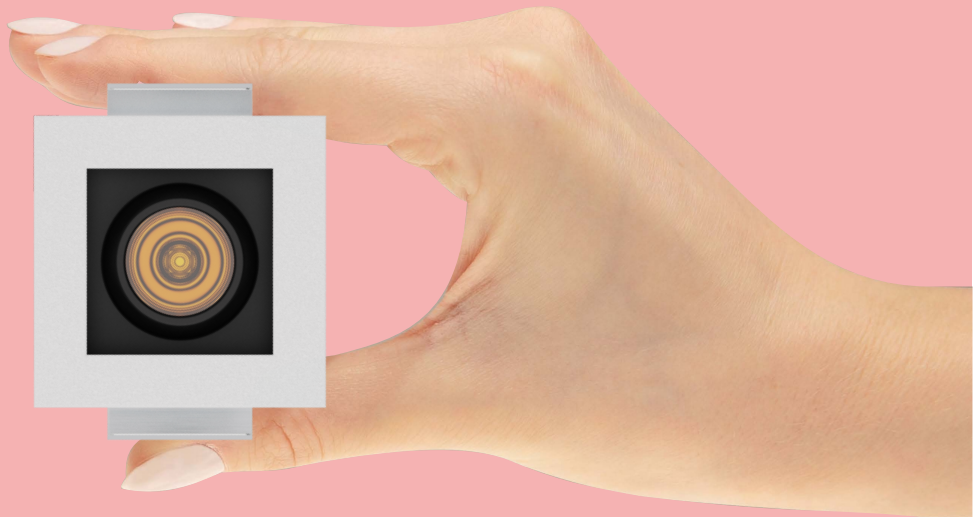


A small-sized embedded system with maximum visual comfort and total screening. Absolute accessibility to the sources of light to feed the luminaries. Closed optics solutions for accent illumination or open for general illumination, enabling a continuous line composition.

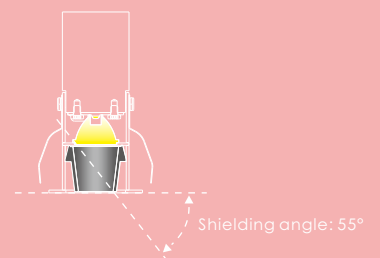

TARGET SERIES

A modular downlight concept has been created with visual comfort as its design starting point, offering excellent lighting versatility under minimal formal expression, with the possibility to choose between accent or general lighting, as well as a wide variety of lengths, modular layouts and finishes.

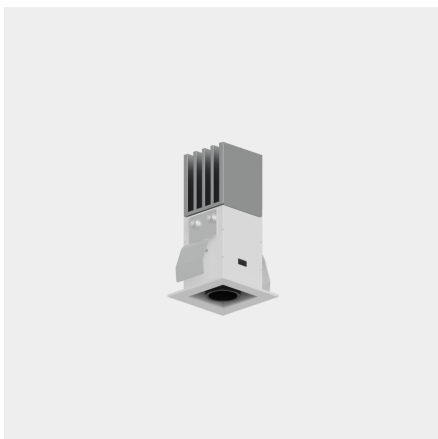





Target

Fixed trim Downlight

-  Ceiling recessed
-  AC 220V~240V
-  Ra 95
-  Lens
-  Class II
-  L33* W33 mm
-  White(WH)
-  Black(BK)



Wattage	Beam Angle	2700K	3000K	4000K
Max. 4W	 13°	01.4001.WH 01.4001.BK	01.4002.WH 01.4002.BK	01.4003.WH 01.4003.BK
	 25°	01.4004.WH 01.4004.BK	01.4005.WH 01.4005.BK	01.4006.WH 01.4006.BK

Dimming: On/Off,DALI
UGR: ≤9
SDCM: ≤3
Luminous efficacy: 58lm/W
luminaire Lifetime: 50000h (L80B50, T a25° C)
Material: Aluminium
Working Temperature (°C): -20° C ~ +45° C
Transformer availability: LED DC 3V 1200mA




Target

-  Ceiling recessed
-  AC 220V~240V
-  Ra 95
-  Lens
-  Class II
-  L60* W33 mm
-  White (WH)
-  Black (BK)



Fixed trim Downlight



Wattage	Beam Angle	2700K	3000K	4000K
Max. 7.5W	 13°	01.4007.WH 01.4007.BK	01.4008.WH 01.4008.BK	01.4009.WH 01.4009.BK
	 25°	01.4010.WH 01.4010.BK	01.4011.WH 01.4011.BK	01.4012.WH 01.4012.BK

Dimming:

UGR:

SDCM:

Luminous efficacy:

Luminaire Lifetime:

Material:

Working Temperature (°C):

Transformer availability:

On/Off,DALI

≤9

≤3

58lm/W

50000h (L80B50, T a25° C)

Aluminium

-20° C ~ +45° C


LED DC 6V 1200mA



Target

Fixed trim Downlight

-  Ceiling recessed
-  AC 220V~240V
-  Ra 95
-  Lens
-  Class II
-  L112*W33 mm
-  White(WH)
-  Black(BK)



Wattage	Beam Angle	2700K	3000K	4000K
Max. 13.5W	 13°	01.4013.WH	01.4014.WH	01.4015.WH
		01.4013.BK	01.4014.BK	01.4015.BK
	 25°	01.4016.WH	01.4017.WH	01.4018.WH
		01.4016.BK	01.4017.BK	01.4018.BK

Dimming: On/Off, 1-10V,DALI,TRIAC
UGR: ≤9
SDCM: ≤3
Luminous efficacy: 58lm/W
luminaire Lifetime: 50000h (L80B50, T a25° C)
Material: Aluminium
Working Temperature (°C): -20° C ~ +45° C
Transformer availability: LED DC 12V 1100mA








Target

Fixed Surface Mounted Downlight

-  Ceiling mounted
-  AC 220V~240V
-  Ra 95
-  Lens
-  Class II
-  White (WH)
-  Black (BK)
-  Silver (SI)
-  Chrome (CH)



DIM



TUNABLE WHITE

Wattage	Beam Angle	2700K	3000K	4000K
Max. 8W	 13°	51.6001.WH	51.6002.WH	51.6003.WH
		51.6001.BK	51.6002.BK	51.6003.BK
		51.6001.SI	51.6002.SI	51.6003.SI
		51.6001.CH	51.6002.CH	51.6003.CH
	 25°	51.6004.WH	51.6005.WH	51.6006.WH
		51.6004.BK	51.6005.BK	51.6006.BK
		51.6004.SI	51.6005.SI	51.6006.SI
		51.6004.CH	51.6005.CH	51.6006.CH

Dimming:

UGR:

SDCM:

Luminous efficacy:

luminaire Lifetime:

Material:

Working Temperature (°C):

Transformer availability:

On/Off

≤9

≤3

58lm/W

50000h (L80B50, T a25° C)

Aluminium

-20° C ~ +45° C



AC 220V~240V Drive include



Target

Adjustable Surface Mounted Downlight

-  Ceiling mounted
-  AC 220V~240V
-  Ra 95
-  Lens
-  Class II
-  0°~90°
-  0°~355°
-  White(WH)
-  Black(BK)
-  Silver(SI)
-  Chrome(CH)



Wattage	Beam Angle	2700K	3000K	4000K
Max. 8W	 13°	53.6007.WH	53.6008.WH	53.6009.WH
		53.6007.BK	53.6008.BK	53.6009.BK
		53.6007.SI	53.6008.SI	53.6009.SI
		53.6007.CH	53.6008.CH	53.6009.CH
	 25°	53.6010.WH	53.6011.WH	53.6012.WH
		53.6010.BK	53.6011.BK	53.6012.BK
		53.6010.SI	53.6011.SI	53.6012.SI
		53.6010.CH	53.6011.CH	53.6012.CH

- Dimming:

UGR:

SDCM:

Luminous efficacy:

luminaire Lifetime:

Material:

Working Temperature (°C):

Transformer availability:
- On/Off

≤9

≤3

58lm/W

50000h (L80B50, T a25° C)

Aluminium

-20° C ~ +45° C


AC 220V~240V Drive include



Target

Adjustable trim Downlight

-  Ceiling recessed
-  AC 220V~240V
-  Ra 95
-  Lens
-  Class II
-  Ø 55 mm
-  0°~90°
-  0°~355°
-  White(WH)
-  Black(BK)
-  Silver(SI)
-  Chrome(CH)



Wattage	Beam Angle	2700K	3000K	4000K
Max. 8W	 13°	03.6001.WH	03.6002.WH	03.6003.WH
		03.6001.BK	03.6002.BK	03.6003.BK
		03.6001.SI	03.6002.SI	03.6003.SI
		03.6001.CH	03.6002.CH	03.6003.CH
	 25°	03.6004.WH	03.6005.WH	03.6006.WH
		03.6004.BK	03.6005.BK	03.6006.BK
		03.6004.SI	03.6005.SI	03.6006.SI
		03.6004.CH	03.6005.CH	03.6006.CH

Dimming:
 UGR:
 SDCM:
 Luminous efficacy:
 luminaire Lifetime:
 Material:
 Working Temperature (°C):
 Transformer availability:

On/Off
 ≤9
 ≤3
 58lm/W
 50000h (L80B50, T a25° C)
 Aluminium
 -20° C ~ +45° C
 AC 220V~240V Drive include








Target

Track Mounted Luminaire

-  Ceiling Track
-  AC 220V~240V
-  Ra 95
-  Lens
-  Class II
-  0°~90°
-  0°~355°
-  White(WH)
-  Black(BK)
-  Silver(SI)
-  Chrome(CH)



Wattage	Beam Angle	2700K	3000K	4000K
Max. 8W	 13°	21.6001.WH	21.6002.WH	21.6003.WH
		21.6001.BK	21.6002.BK	21.6003.BK
		21.6001.SI	21.6002.SI	21.6003.SI
		21.6001.CH	21.6002.CH	21.6003.CH
	 25°	21.6004.WH	21.6005.WH	21.6006.WH
		21.6004.BK	21.6005.BK	21.6006.BK
		21.6004.SI	21.6005.SI	21.6006.SI
		21.6004.CH	21.6005.CH	21.6006.CH

Dimming:
UGR:
SDCM:
Luminous efficacy:
luminaire Lifetime:
Material:
Working Temperature (°C):
Transformer availability:



On/Off
≤9
≤3
58lm/W
50000h (L80B50, T a25° C)
Aluminium
-20° C ~ +45° C
AC 220V~240V Drive include



Target (1.5 SERIES)

Magnetic Track Luminaire

-  Ceiling Track
-  DC 48V
-  Ra 95
-  Lens
-  Class III
-  0°~90°
-  0°~355°
-  White (WH)
-  Black (BK)
-  Silver (SI)
-  Chrome (CH)



Wattage	Beam Angle	2700K	3000K	4000K
Max. 8W	 13°	33.6001.WH	33.6002.WH	33.6003.WH
		33.6001.BK	33.6002.BK	33.6003.BK
		33.6001.SI	33.6002.SI	33.6003.SI
		33.6001.CH	33.6002.CH	33.6003.CH
	 25°	33.6004.WH	33.6005.WH	33.6006.WH
		33.6004.BK	33.6005.BK	33.6006.BK
		33.6004.SI	33.6005.SI	33.6006.SI
		33.6004.CH	33.6005.CH	33.6006.CH

Dimming: On/Off, Knob
UGR: ≤9
SDCM: ≤3
Luminous efficacy: 58lm/W
luminaire Lifetime: 50000h (L80B50, T a25° C)
Material: Aluminium
Working Temperature (°C): -20° C ~ +45° C
Transformer availability: DC 48V




Target

(2.0 SERIES)

Magnetic Track Luminaire

- Ceiling Track
- DC 48V
- Ra 95
- Lens
- Class III
- 0°~90°
- 0°~355°
- White(WH)
- Black(BK)
- Silver(SI)
- Chrome(CH)



Wattage	Beam Angle	2700K	3000K	4000K
Max. 8W	13°	33.6007.WH	33.6008.WH	33.6009.WH
		33.6007.BK	33.6008.BK	33.6009.BK
		33.6007.SI	33.6008.SI	33.6009.SI
		33.6007.CH	33.6008.CH	33.6009.CH
	25°	33.6010.WH	33.6011.WH	33.6012.WH
		33.6010.BK	33.6011.BK	33.6012.BK
		33.6010.SI	33.6011.SI	33.6012.SI
		33.6010.CH	33.6011.CH	33.6012.CH

Dimming: On/Off, 1-10V
UGR: ≤9
SDCM: ≤3
Luminous efficacy: 58lm/W
luminaire Lifetime: 50000h (L80B50, T a25° C)
Material: Aluminium
Working Temperature (°C): -20° C ~ +45° C
Transformer availability: DC 48V





OBT LIGHTING LIMITED

Unit G1 Capital House 61
Amhurst Road, London,
United Kingdom, E8 1LL
services@obtlighting.cn
Hotline : 400 090 2289

www.obt.ltd



Floor 2, No. 979, Yunhan
Road, Lingang New District,
China (Shanghai) pilot Free
Trade Zone
services@obtlighting.cn
Hotline : 400 090 2289

www.obt.ltd

Office 5, 8/F, Mega Cube,
8 Wang Kwong Road, Kowloon
Bay, Kowloon, Hong Kong
services@obtlighting.cn
Hotline : 400 090 2289

www.obt.ltd