

# Mini Spot Series



*Mini Spot volume aluminium body is integrated in ceiling. The ceiling will be kept clean with Mini Spot which is suitable for all spaces. Different color schemes are customizable and very creative, with great effort in the most subtle areas. Mini Spot is commonly used in ceiling for creating starry sky roof. It can be used as the key lighting as well as supplementary lighting in the space. The circular shaped design of the mini fixtures and its deeper placed LED source make sure that glare is reduced to a minimum when Mini is installed in the ceiling. The small trim gives a refined touch to this elegant luminaire. Available in 4 sizes, with trim or trimless, a range of beam angles and multiple finishing colours, Mini Spot is an easy-to-use downlight throughout the project. Pursuing exquisite optical art, coupled with diverse and diverse humanistic needs, taming cold and rigid spaces, and restoring the beauty of architectural space with the light of human emotions.*

Petite and delicate

# 26

# MINI SPOT SERIES

The circular shaped design of the mini textures and its deeper placed LED source make sure that glare is reduced to a minimum when Mini is installed in the ceiling. The small trim gives a refined touch to this elegant luminary. Available in 4 sizes, with trim or trimness, a range of beam angles and multiple noshing co-lours, Mini is an easy-to-use downright throughout the project.



A  
*completely*  
*new*  
*approach*  
*to*  
*architectural*  
*lighting*





# Mini Spot

-  Ceiling recessed
-  AC 220V~240V
-  Ra 95
-  Lens
-  Class II
-  Ø 30 mm
-  White(WH)
-  Black(BK)
-  Chrome(CH)









Wattage	Beam Angle	2700K	3000K	3500K	4000K	2700~6500K
Max. 3W	15°	01.3001.WH	01.3002.WH	01.3025.WH	01.3003.WH	01.3019.WH
		01.3001.BK	01.3002.BK	01.3025.BK	01.3003.BK	01.3019.BK
		01.3001.CH	01.3002.CH	01.3025.CH	01.3003.CH	01.3019.CH
	24°	01.3004.WH	01.3005.WH	01.3026.WH	01.3006.WH	01.3020.WH
		01.3004.BK	01.3005.BK	01.3026.BK	01.3006.BK	01.3020.BK
		01.3004.CH	01.3005.CH	01.3026.CH	01.3006.CH	01.3020.CH
	36°	01.3007.WH	01.3008.WH	01.3027.WH	01.3009.WH	01.3021.WH
		01.3007.BK	01.3008.BK	01.3027.BK	01.3009.BK	01.3021.BK
		01.3007.CH	01.3008.CH	01.3027.CH	01.3009.CH	01.3021.CH

Dimming: On/Off, 1-10V, DALI, TRIAC  
 UGR: ≤15  
 SDCM: ≤3  
 Luminous efficacy: 78lm/W  
 luminaire Lifetime: 50000h ( L80B10, T a25° C )  
 Material: Aluminium  
 Working Temperature ( °C): -20° C ~ +45° C  
 Transformer availability: LED DC 36V 80mA



# Mini Spot

-  Ceiling recessed
-  AC 220V~240V
-  Ra 95
-  Lens
-  Class II
-  Ø 35 mm
-  White (WH)
-  Black (BK)
-  Chrome (CH)



Wattage	Beam Angle	2700K	3000K	3500K	4000K	2700~6500K
Max. 3W	15°	10.3001.WH 10.3001.BK 10.3001.CH	10.3002.WH 10.3002.BK 10.3002.CH	10.3025.WH 10.3025.BK 10.3025.CH	10.3003.WH 10.3003.BK 10.3003.CH	10.3019.WH 10.3019.BK 10.3019.CH
	24°	10.3004.WH 10.3004.BK 10.3004.CH	10.3005.WH 10.3005.BK 10.3005.CH	10.3026.WH 10.3026.BK 10.3026.CH	10.3006.WH 10.3006.BK 10.3006.CH	10.3020.WH 10.3020.BK 10.3020.CH
	36°	10.3007.WH 10.3007.BK 10.3007.CH	10.3008.WH 10.3008.BK 10.3008.CH	10.3027.WH 10.3027.BK 10.3027.CH	10.3009.WH 10.3009.BK 10.3009.CH	10.3021.WH 10.3021.BK 10.3021.CH

Dimming: On/Off, 1-10V, DALI, TRIAC  
 UGR: ≤15  
 SDCM: ≤3  
 Luminous efficacy: 78lm/W  
 luminaire Lifetime: 50000h ( L80B10, T a25° C )  
 Material: Aluminium  
 Working Temperature ( °C): -20° C ~ +45° C  
 Transformer availability: LED DC 36V 80mA










# Mini Spot

-  Ceiling recessed
-  AC 220V~240V
-  Ra 95
-  Lens
-  Class II
-  Ø 30 mm
-  White (WH)
-  Black (BK)
-  Chrome (CH)



Wattage	Beam Angle	2700K	3000K	3500K	4000K	2700~6500K
Max. 5W	15°	01.3010.WH	01.3011.WH	01.3028.WH	01.3012.WH	01.3022.WH
		01.3010.BK	01.3011.BK	01.3028.BK	01.3012.BK	01.3022.BK
		01.3010.CH	01.3011.CH	01.3028.CH	01.3012.CH	01.3022.CH
	24°	01.3013.WH	01.3014.WH	01.3029.WH	01.3015.WH	01.3023.WH
		01.3013.BK	01.3014.BK	01.3029.BK	01.3015.BK	01.3023.BK
		01.3013.CH	01.3014.CH	01.3029.CH	01.3015.CH	01.3023.CH
	36°	01.3016.WH	01.3017.WH	01.3030.WH	01.3018.WH	01.3024.WH
		01.3016.BK	01.3017.BK	01.3030.BK	01.3018.BK	01.3024.BK
		01.3016.CH	01.3017.CH	01.3030.CH	01.3018.CH	01.3024.CH

Dimming:

UGR:

SDCM:

Luminous efficacy:

luminaire Lifetime:

Material:

Working Temperature ( °C):

Transformer availability:

On/Off, 1-10V, DALI, TRIAC

≤15

≤3

78lm/W

50000h ( L80B10, T a25° C )




Aluminium


-20° C ~ +45° C

LED DC 36V 120mA



# Mini Spot

-  Ceiling recessed
-  AC 220V~240V
-  Ra 95
-  Lens
-  Class II
-  Ø 35 mm
-  White (WH)
-  Black (BK)
-  Chrome (CH)




Wattage	Beam Angle	2700K	3000K	3500K	4000K	2700~6500K
Max. 5W	15°	10.3010.WH 10.3010.BK 10.3010.CH	10.3011.WH 10.3011.BK 10.3011.CH	10.3028.WH 10.3028.BK 10.3028.CH	10.3012.WH 10.3012.BK 10.3012.CH	10.3022.WH 10.3022.BK 10.3022.CH
	24°	10.3013.WH 10.3013.BK 10.3013.CH	10.3014.WH 10.3014.BK 10.3014.CH	10.3029.WH 10.3029.BK 10.3029.CH	10.3015.WH 10.3015.BK 10.3015.CH	10.3023.WH 10.3023.BK 10.3023.CH
	36°	10.3016.WH 10.3016.BK 10.3016.CH	10.3017.WH 10.3017.BK 10.3017.CH	10.3030.WH 10.3030.BK 10.3030.CH	10.3018.WH 10.3018.BK 10.3018.CH	10.3024.WH 10.3024.BK 10.3024.CH

Dimming: On/Off, 1-10V, DALI, TRIAC  
 UGR: ≤15  
 SDCM: ≤3  
 Luminous efficacy: 78lm/W  
 luminaire Lifetime: 50000h ( L80B10, T a25° C )  
 Material: Aluminium  
 Working Temperature ( °C): -20° C ~ +45° C  
 Transformer availability: LED DC 36V 120mA




# Installation Schemes

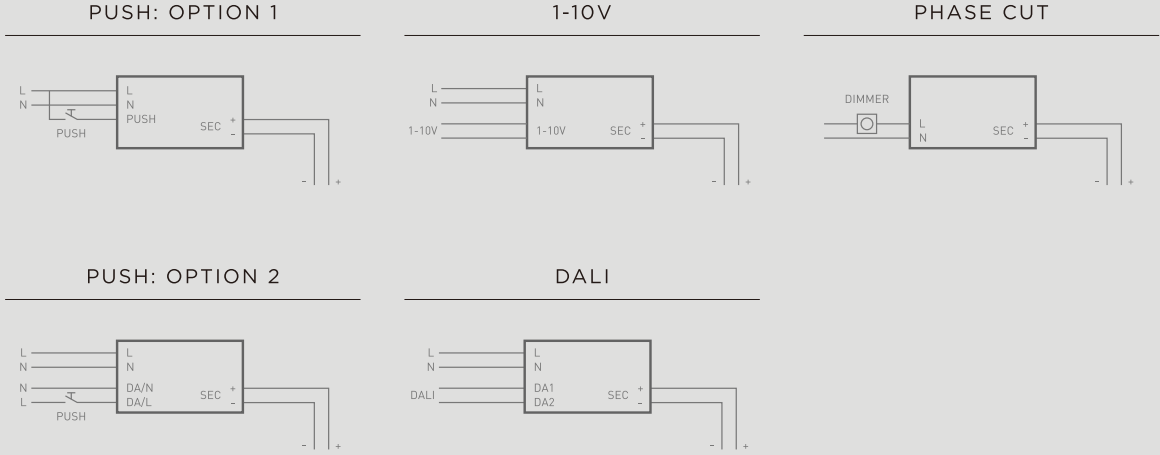


# Connection Tips

SEVERAL FIXTURES CONNECTION TO A SINGLE CONSTANT CURRENT DRIVER

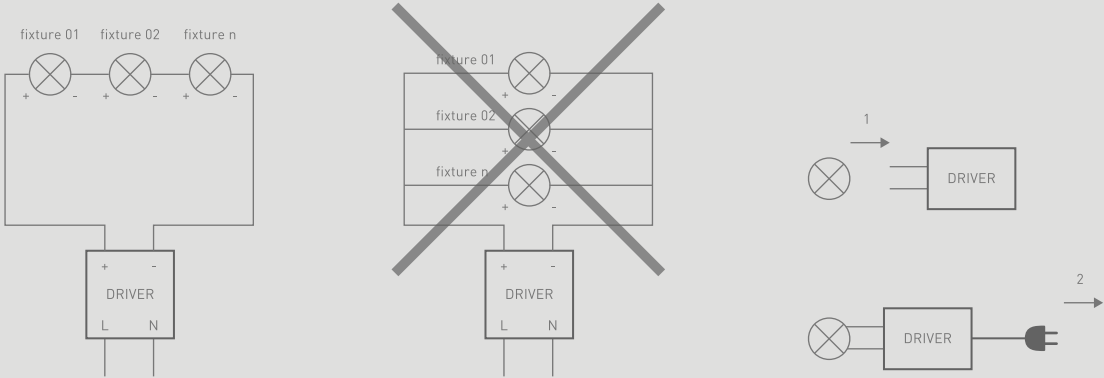

# Trimless Mounting

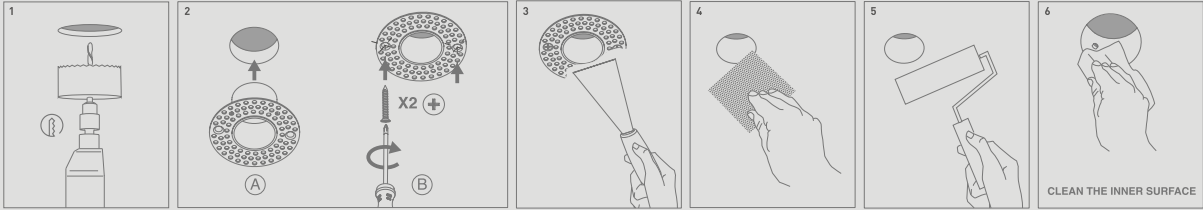

*Publication date: December 2022*

*©Copyright OBT lighting*

*With thank to all contributors for the realization of this catalogue*

*Designed by OBT lighting Graphic Design Department*

*No part of this catalogue may be copied without written authorization of OBT lighting*



## **OBT LIGHTING LIMITED**

Unit G1 Capital House 61  
Amhurst Road, London,  
United Kingdom, E8 1LL  
services@obtlighting.cn  
Hotline : 400 090 2289

[www.obt.ltd](http://www.obt.ltd)



Floor 2, No. 979, Yunhan  
Road, Lingang New District,  
China (Shanghai) pilot Free  
Trade Zone  
services@obtlighting.cn  
Hotline : 400 090 2289

[www.obt.ltd](http://www.obt.ltd)

Office 5, 8/F, Mega Cube,  
8 Wang Kwong Road, Kowloon  
Bay, Kowloon, Hong Kong  
services@obtlighting.cn  
Hotline : 400 090 2289

[www.obt.ltd](http://www.obt.ltd)

Room 201, building 3, No. 67,  
Luoja Nanyue street, Dalong  
street, Panyu District,  
Guangzhou  
services@obtlighting.cn  
Hotline : 400 090 2289

[www.obt.ltd](http://www.obt.ltd)