


Ron

A photograph of a room interior, likely a boutique or a studio, with a warm, sepia-toned aesthetic. In the center, a wooden mannequin stands on a tall, dark wooden pedestal. To the left, a white corduroy chair is visible. The background shows a window with a view of the outdoors. The overall mood is elegant and classic.

Great
Visual
Comfort




Ø34



Ø38



Ø61



Ø79



Ron

Installation Instructions


One-piece carriage with integrated heat dissipation and six internal circular holes for top and bottom convection. Adjust the number of cooling fins to meet different illumination requirements.

New thermal design with convection around the perimeter for higher power in a very small size.



Ron

Fixed Recessed

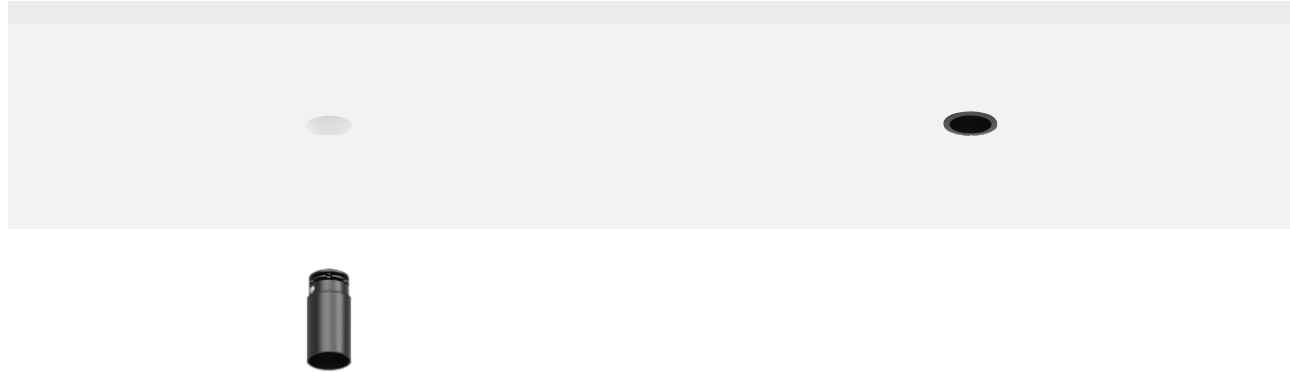

Body

The ultra-compact die-cast aluminum body integrates seamlessly into the ceiling, maintaining a clean, minimalist aesthetic.

Available in fixed configurations with power options starting at 3W. A classic and practical lighting solution with superior optical performance.

Finish

Powder coated finish in white (W), black (B), and chrome (H).

Optional

Trimless



Driver

Supplied with non-dimmable remote driver. Driver unit exceeds luminaire aperture; install above ceiling using extension cable.
Dimming Options: ON/OFF | 0-10V | DALI | TRIAC | CASAMBI.
220-240V 50/60Hz.

Accessories

N/A

Optic

Lens.
Beam Angle: 15° / 24° / 36°.

LED Sources






Light source options: High-power LED or COB LED.
CRI: 95 or 97 | CCT: 2700K / 3000K / 3500K / 4000K / 2700K-6500K (tunable white).
Additional CRI and CCT options available upon request.

Applications

Suitable for all commercial spaces. Transcending traditional lighting methods and effects, it integrates seamlessly into modern environments to achieve the effect of "seeing only the light, not the fixture."

Ron

Fixed Recessed




Code ordering example: * * . 3 0 6 1 . * * * * * *

	Product code	LED Power	Delivered Lumen	Finish	Cup	Beam Angle (BA°)	CCT Options	Dimming Options
Mini Spot Round Fixed	01 Trim	Max.3W	240lm	W White	W White	15 15°	27 2700K	0 ON/OFF
	30 Trimless			B Black	B Black	24 24°	30 3000K	1 0-10V
				H Chrome		36 36°	35 3500K	D DALI
							40 4000K	T TRIAC
							TW 2700K-6500K	C CASAMBI

Ron

Fixed Recessed

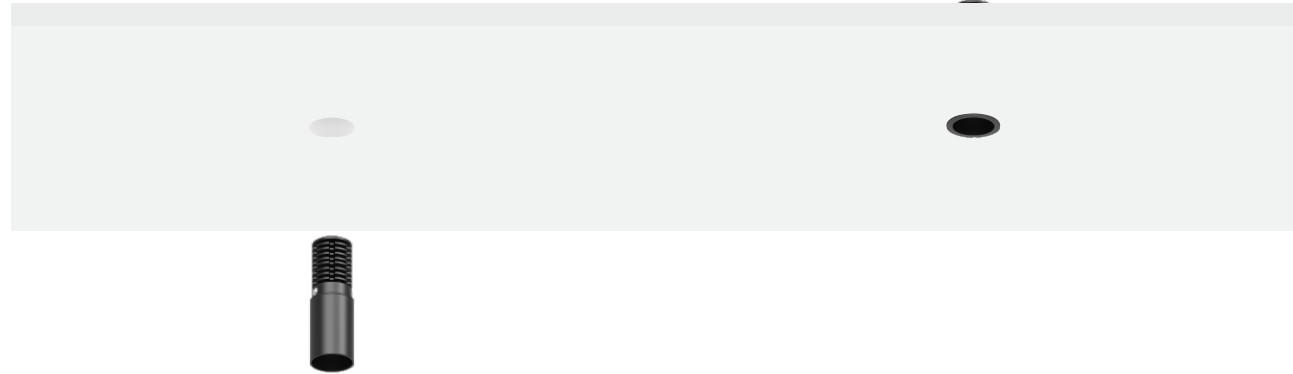

Body

The ultra-compact die-cast aluminum body integrates seamlessly into the ceiling, maintaining a clean, minimalist aesthetic.

Available in fixed configurations with power options starting at 6W. A classic and practical lighting solution with superior optical performance.

Finish

Powder coated finish in white (W), black (B), and chrome (H).

Optional

Trimless



Driver

Supplied with non-dimmable remote driver. Driver unit exceeds luminaire aperture; install above ceiling using extension cable.
Dimming Options: ON/OFF | 0-10V | DALI | TRIAC | CASAMBI.
220-240V 50/60Hz.

Accessories

N/A

Optic

Lens.
Beam Angle: 15° / 24° / 36°.

LED Sources





Light source options: High-power LED or COB LED.
CRI: 95 or 97 | CCT: 2700K / 3000K / 3500K / 4000K / 2700K-6500K (tunable white).
Additional CRI and CCT options available upon request.

Applications

Suitable for all commercial spaces. Transcending traditional lighting methods and effects, it integrates seamlessly into modern environments to achieve the effect of "seeing only the light, not the fixture."

Ron


Fixed Recessed

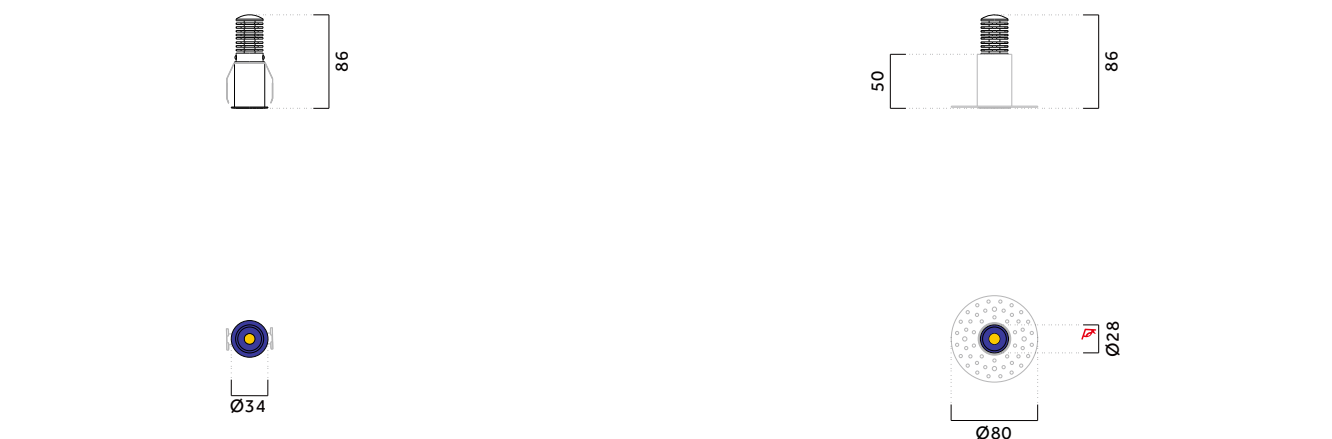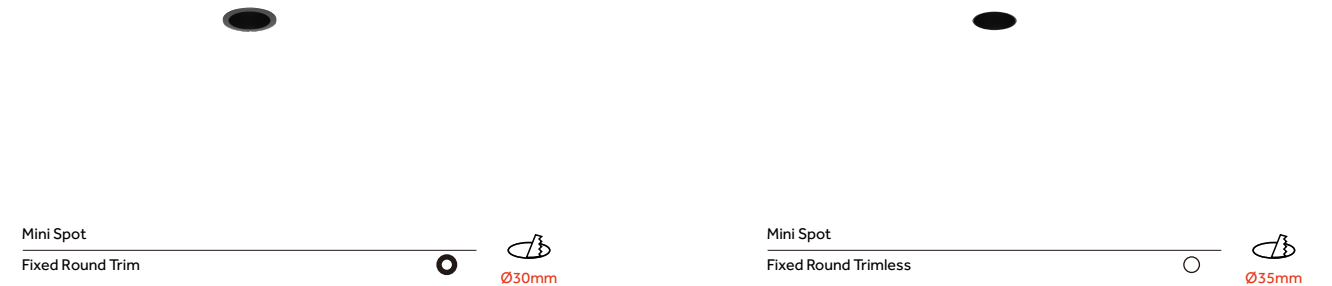

Code ordering example: * * . 3 0 8 6 . * * * * * *

	Product code	LED Power	Delivered Lumen	Finish	Cup	Beam Angle (BA°)	CCT Options	Dimming Options
Mini Spot Round Fixed	01 Trim	Max.6W	480lm	W White	W White	15 15°	27 2700K	0 ON/OFF
	30 Trimless			B Black	B Black	24 24°	30 3000K	1 0-10V
				H Chrome		36 36°	35 3500K	D DALI
							40 4000K	T TRIAC
							TW 2700K-6500K	C CASAMBI


Ron



The light is the breath of space. Between the wood texture, it breathes a quiet and warm atmosphere.

Ron

Adjustable Recessed

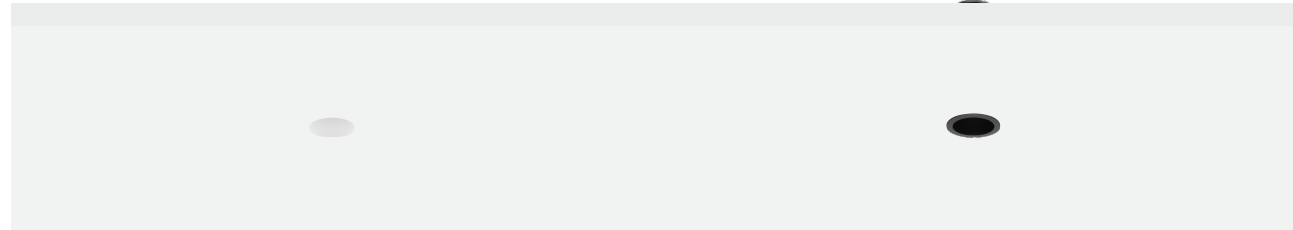

Body

A modular, high-performance recessed downlight featuring a deeply regressed, virtually invisible LED light source that delivers exceptional luminosity with optimal glare control. Its recessed cylindrical housing and circular ceiling trim are precision-crafted from cast aluminum.

With an ultra-thin, narrow bezel design, the luminaire blends seamlessly into the ceiling, creating a sleek and integrated aesthetic.

Optic

Lens.
Beam Angle: 15° / 24° / 36°.

LED Sources

Light source options: High-power LED or COB LED.
CRI: 95 or 97 | CCT: 2700K / 3000K / 3500K / 4000K / 2700K-6500K (tunable white).
Additional CRI and CCT options available upon request.

Finish

Powder coated finish in white (W), black (B).

Optional

Trimless



Driver

Supplied with non-dimmable remote driver.
Driver unit exceeds luminaire aperture; install above ceiling using extension cable.
Dimming Options: ON/OFF | 0-10V | DALI | TRIAC | CASAMBI.
220-240V 50/60Hz.







Accessories

N/A

Applications

The concealed light source ensures high visual comfort and seamless integration into any architectural environment. It offers added flexibility in light aiming.
Application areas: corridors, retail, showrooms, residential, restaurants, hotels.

Ron Adjustable Recessed

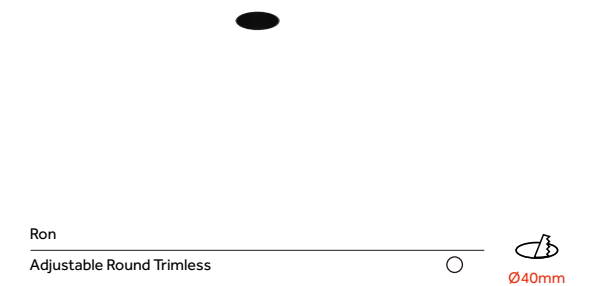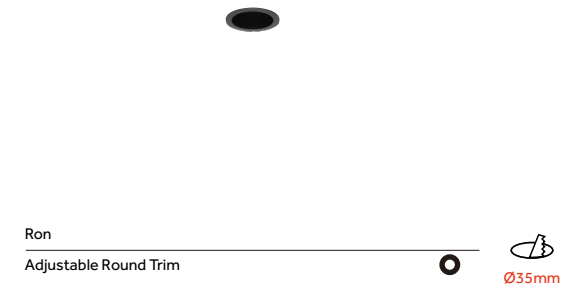


Code ordering example: * * . 3 5 5 9 . * * * * * *

	Product code	LED Power	Delivered Lumen	Finish	Cup	Beam Angle (BA°)	CCT Options	Dimming Options
Ron Round Adjustable	02 Trim	Max.6W	540lm	W White	W White	15 15°	27 2700K	0 ON/OFF
	11 Trimless			B Black	B Black	24 24°	30 3000K	1 0-10V
					G Gold	36 36°	35 3500K	D DALI
					S Silver		40 4000K	T TRIAC
							TW 2700K-6500K	C CASAMBI

Ron

Adjustable Recessed

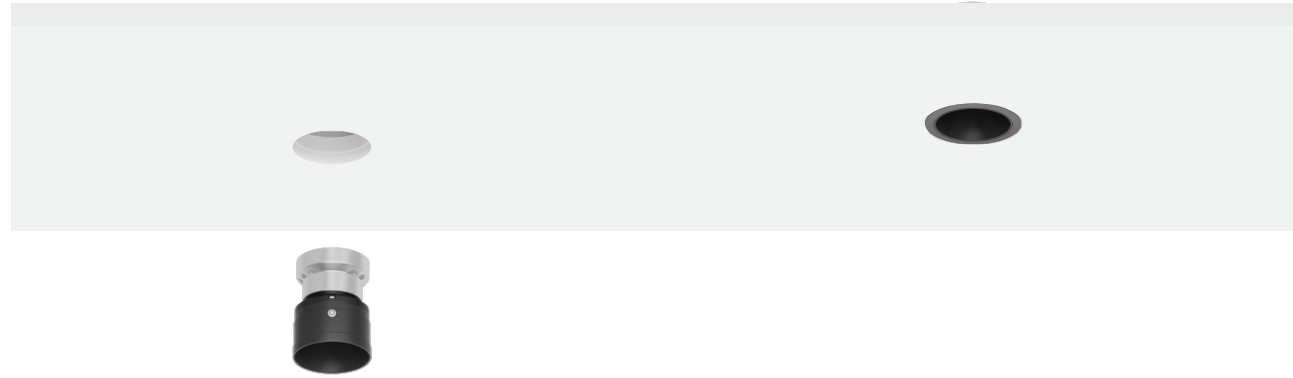

Body

A modular, high-performance recessed downlight featuring a deeply regressed, virtually invisible LED light source that delivers exceptional luminosity with optimal glare control. Its recessed cylindrical housing and circular ceiling trim are precision-crafted from cast aluminum.

With an ultra-thin, narrow bezel design, the luminaire blends seamlessly into the ceiling, creating a sleek and integrated aesthetic.

Optic

Lens.
Beam Angle: 15° / 24° / 36°.

LED Sources

Light source options: High-power LED or COB LED.
CRI: 95 or 97 | CCT: 2700K / 3000K / 3500K / 4000K / 2700K-6500K (tunable white).
Additional CRI and CCT options available upon request.

Finish

Powder coated finish in white (W), black (B).

Driver

Supplied with non-dimmable remote driver.
Driver unit exceeds luminaire aperture; install above ceiling using extension cable.
Dimming Options: ON/OFF | 0-10V | DALI | TRIAC | CASAMBI.
220-240V 50/60Hz.

Accessories

N/A

Applications

The concealed light source ensures high visual comfort and seamless integration into any architectural environment. It offers added flexibility in light aiming.
Application areas: corridors, retail, showrooms, residential, restaurants, hotels.

Optional







Trim



Trimless



Ron Adjustable Recessed

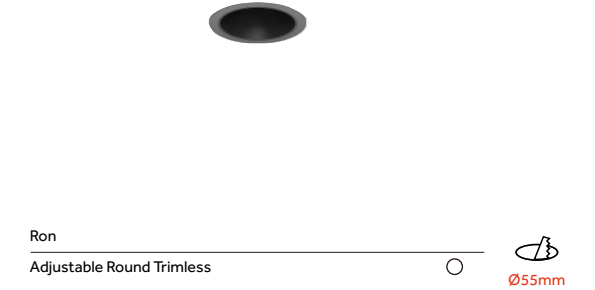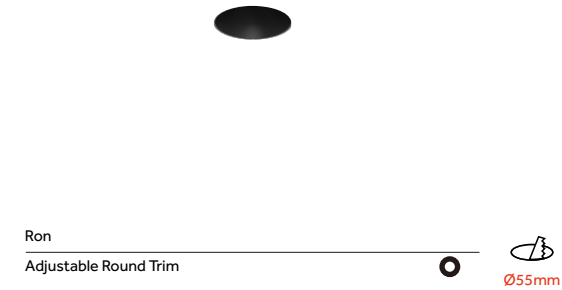


Code ordering example: * * . 5 5 6 5 . * * * * * *

	Product code	LED Power	Delivered Lumen	Finish	Cup	Beam Angle (BA°)	CCT Options	Dimming Options
Ron Round Adjustable	02 Trim	Max.8W	720lm	W White	W White	15 15°	27 2700K	0 ON/OFF
	11 Trimless			B Black	B Black	24 24°	30 3000K	1 0-10V
					G Gold	36 36°	35 3500K	D DALI
					S Silver		40 4000K	T TRIAC
							TW 2700K-6500K	C CASAMBI

Ron

Adjustable Recessed

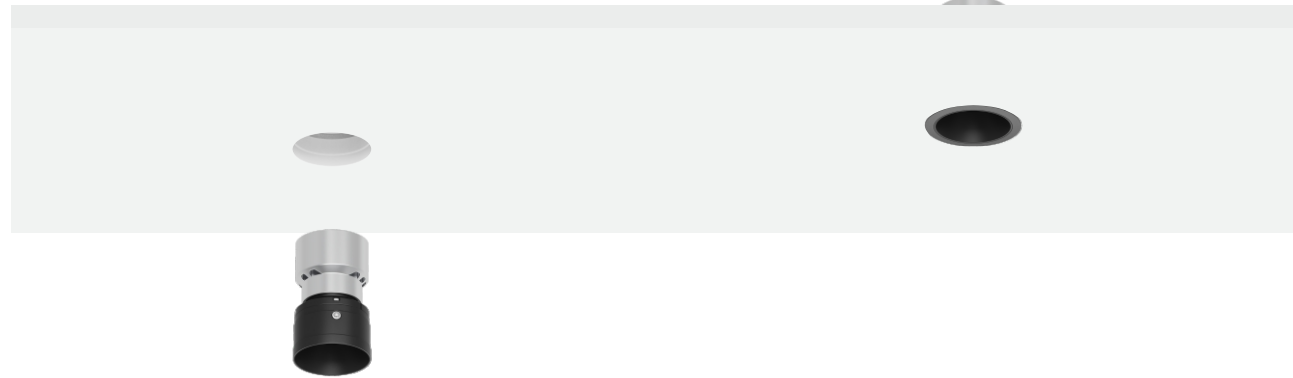

Body

A modular, high-performance recessed downlight featuring a deeply regressed, virtually invisible LED light source that delivers exceptional luminosity with optimal glare control. Its recessed cylindrical housing and circular ceiling trim are precision-crafted from cast aluminum.

With an ultra-thin, narrow bezel design, the luminaire blends seamlessly into the ceiling, creating a sleek and integrated aesthetic.

Finish

Powder coated finish in white (W), black (B).

Optional

Trim



Trimless



Optic

Lens.
Beam Angle: 15° / 24° / 36°.







LED Sources

Light source options: High-power LED or COB LED.
CRI: 95 or 97 | CCT: 2700K / 3000K / 3500K / 4000K / 2700K-6500K (tunable white).
Additional CRI and CCT options available upon request.

Applications

The concealed light source ensures high visual comfort and seamless integration into any architectural environment. It offers added flexibility in light aiming. Application areas: corridors, retail, showrooms, residential, restaurants, hotels.

Ron Adjustable Recessed

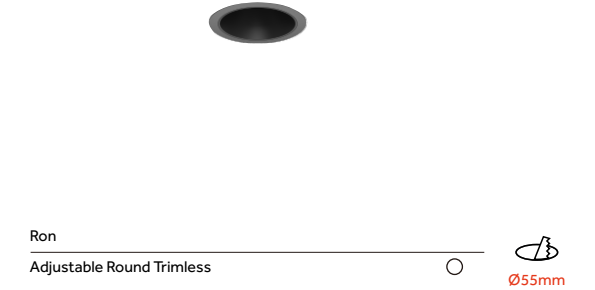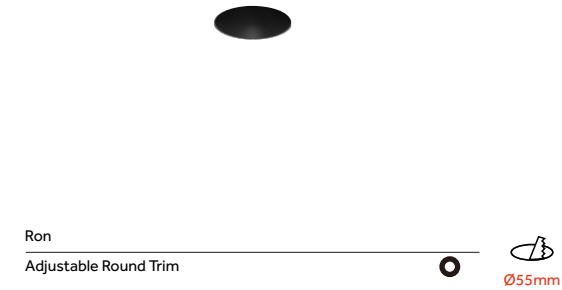


Code ordering example: * * . 5 5 7 9 . * * * * * *

	Product code	LED Power	Delivered Lumen	Finish	Cup	Beam Angle (BA°)	CCT Options	Dimming Options
Ron Round Adjustable	02 Trim	Max.12W	1080lm	W White	W White	15 15°	27 2700K	0 ON/OFF
	11 Trimless			B Black	B Black	24 24°	30 3000K	1 0-10V
					G Gold	36 36°	35 3500K	D DALI
					S Silver		40 4000K	T TRIAC
							TW 2700K-6500K	C CASAMBI

Ron

Adjustable Recessed

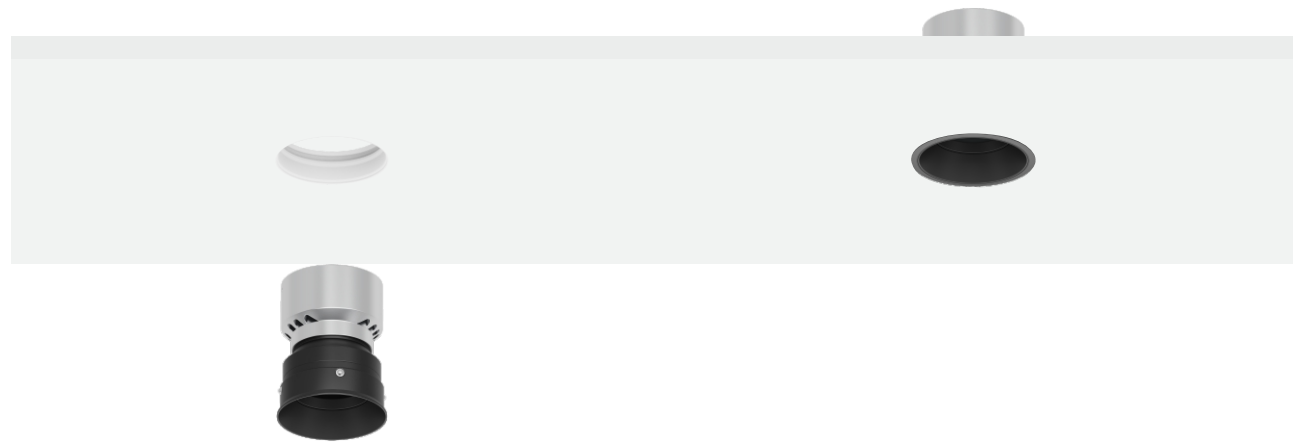

Body

A modular, high-performance recessed downlight featuring a deeply regressed, virtually invisible LED light source that delivers exceptional luminosity with optimal glare control. Its recessed cylindrical housing and circular ceiling trim are precision-crafted from cast aluminum.

With an ultra-thin, narrow bezel design, the luminaire blends seamlessly into the ceiling, creating a sleek and integrated aesthetic.

Finish

Powder coated finish in white (W), black (B).

Optional



Driver

Supplied with non-dimmable remote driver. Driver unit exceeds luminaire aperture; install above ceiling using extension cable.
Dimming Options: ON/OFF | 0-10V | DALI | TRIAC | CASAMBI.
220-240V 50/60Hz.

Accessories

N/A

Optic

Lens.
Beam Angle: 15° / 24° / 36°.






LED Sources

Light source options: High-power LED or COB LED.
CRI: 95 or 97 | CCT: 2700K / 3000K / 3500K / 4000K / 2700K-6500K (tunable white).
Additional CRI and CCT options available upon request.

Applications

The concealed light source ensures high visual comfort and seamless integration into any architectural environment. It offers added flexibility in light aiming. Application areas: corridors, retail, showrooms, residential, restaurants, hotels.

Ron Adjustable Recessed

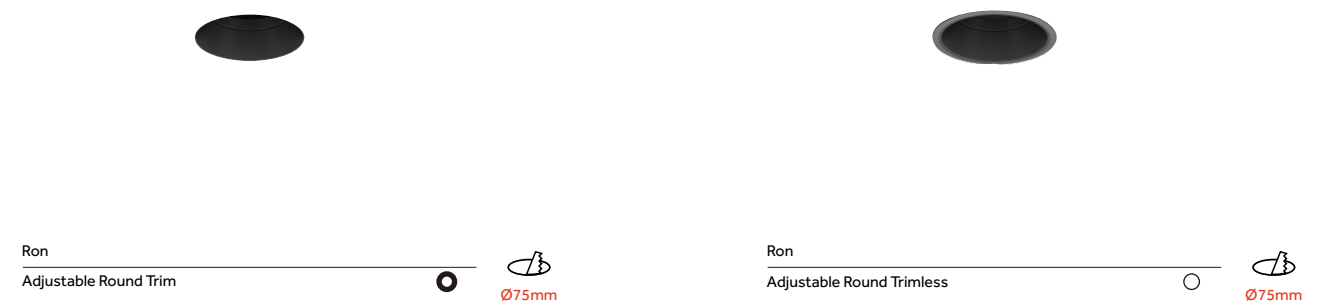

Code ordering example: * * . 7 5 9 2 . * * * * * *

	Product code	LED Power	Delivered Lumen	Finish	Cup	Beam Angle (BA°)	CCT Options	Dimming Options
Ron Round Adjustable	02 Trim	Max.15W	1350lm	W White	W White	15 15°	27 2700K	0 ON/OFF
	11 Trimless			B Black	B Black	24 24°	30 3000K	1 0-10V
					G Gold	36 36°	35 3500K	D DALI
					S Silver		40 4000K	T TRIAC
							TW 2700K-6500K	C CASAMBI



Ron




Square



Ron

Adjustable Recessed

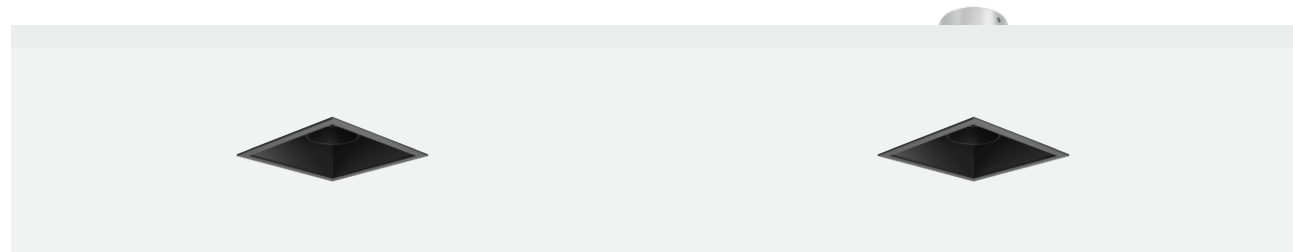

Body

A square mounting trim in cast aluminum with spring-loaded installation brackets for ceiling mounting.

Luminaire body inclusive of snoot in cast aluminum. Tilttable up to 20° in two directions.

Finish

Powder coated finish in white (W), black (B).

Optional

N/A

Driver

Supplied with non-dimmable remote driver. Driver unit exceeds luminaire aperture; install above ceiling using extension cable.
Dimming Options: ON/OFF | 0-10V | DALI | TRIAC | CASAMBI.
220-240V 50/60Hz.

Accessories

N/A

Optic

Lens.
Beam Angle: 15° / 24° / 36° / 50°.




LED Sources

Light source options: High-power LED or COB LED.
CRI: 95 or 97 | CCT: 2700K / 3000K / 3500K / 4000K / 2700K-6500K (tunable white).
Additional CRI and CCT options available upon request.

Applications

Suitable for all commercial environments. Transcends traditional lighting approaches to integrate seamlessly into contemporary architecture—achieving the effect of "seeing the light, not the luminaire.."


Ron Adjustable Recessed

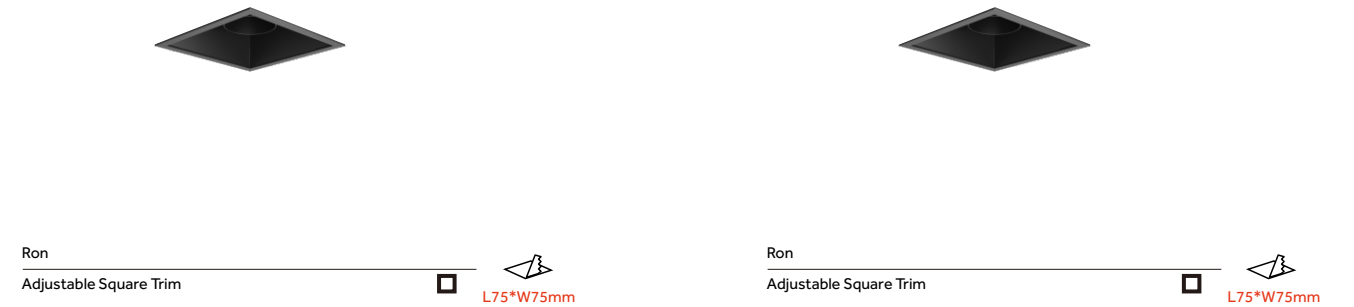

Code ordering example: *** * . 7 5 5 8 . * * * * * *** (Max.8W) *** * . 7 5 7 2 . * * * * * *** (Max.12W)


	Product code	LED Power	Delivered Lumen	Finish	Cup	Beam Angle (BA°)	CCT Options	Dimming Options
Ron Square Adjustable	02 Trim	Max.8W	640lm	W White	W White	15 15°	27 2700K	0 ON/OFF
		Max.12W	960lm	B Black	B Black	24 24°	30 3000K	1 0-10V
						36 36°	35 3500K	D DALI
						50 50°	40 4000K	T TRIAC
							TW 2700K-6500K	C CASAMBI

Installation Schemes

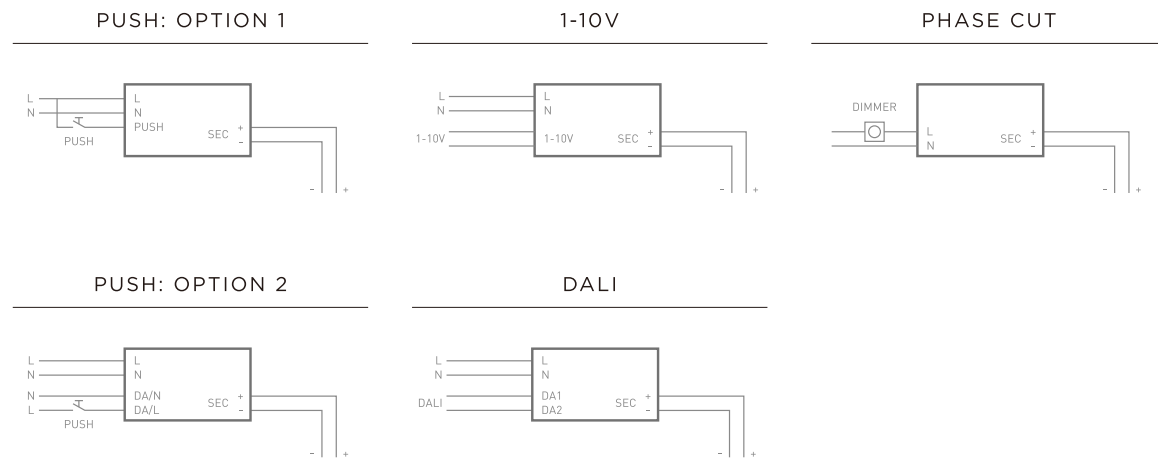


Connection Tips

SEVERAL FIXTURES CONNECTION TO A SINGLE CONSTANT CURRENT DRIVER

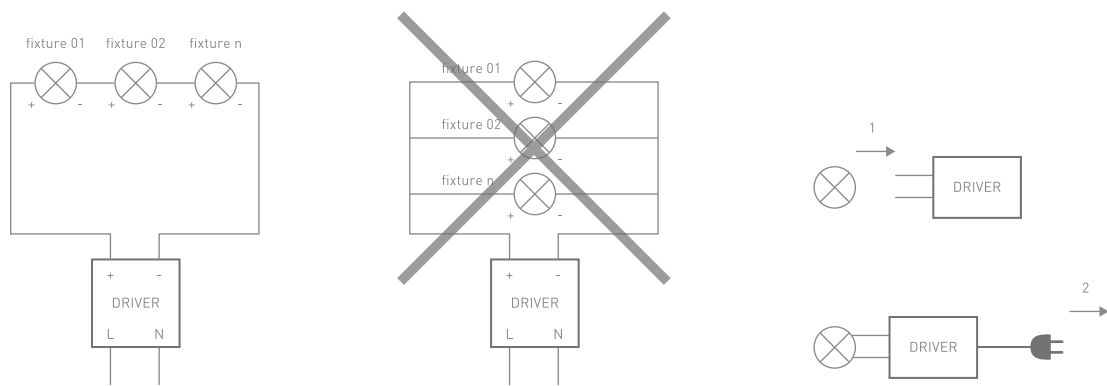

Trimless Mounting

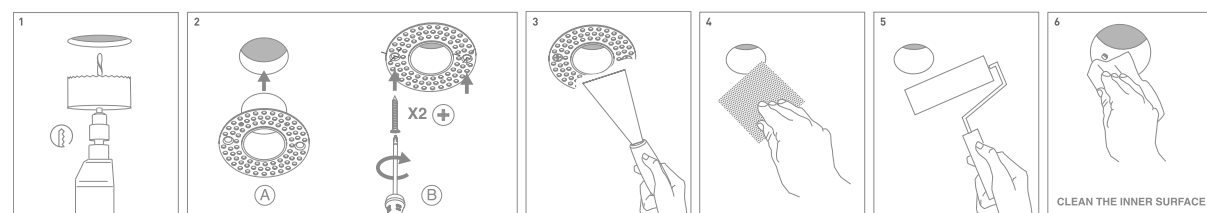

Publication date: December 2025

©Copyright OBT Lighting

Thanks to all contributors for the realization of this catalogue.

Designed by the Graphic Design Department of OBT Lighting.

No part of this catalogue may be reproduced without the written authorization of OBT Lighting.



OBT LIGHTING LIMITED

Unit G1 Capital House 61
Amhurst Road, London,
United Kingdom, E8 1LL
Hotline : 400 090 2289
Email : obt@obt.ltd

www.obt.ltd

Office 5, 8/F, Mega Cube,
8 Wang Kwong Road, Kowloon
Bay, Kowloon, Hong Kong
Hotline : 400 090 2289
Email : obt@obt.ltd

www.obt.ltd



Floor 2, No. 979, Yunhan
Road, Lingang New District,
China (Shanghai) pilot Free
Trade Zone
Hotline : 400 090 2289
Email : obt@obt.ltd

www.obt.ltd

Room 201, building 3, No. 67,
Luoja Nanyue street, Dalong
street, Panyu District,
Guangzhou
Hotline : 400 090 2289
Email : obt@obt.ltd

www.obt.ltd