

Adjustable
round recessed
luminaire

The fixture are rotatable
horizontally 355° and, tiltable
vertically in two directions up to 35°.



HARROW

Harrow

Harrow is the ultimate motorized recessed downlight designed to empower lighting designers with unlimited creative freedom.

DC motors enable a remarkable range of movement, making it an excellent accent lighting solution for restaurants, hotels, and residential lifestyle spaces.



Charrow

Harrow

Adjustable Recessed



Body

These adjustable luminaires are perfect for extraordinary accent lighting in varied settings. Featuring excellent luminous efficiency and an exclusive aesthetic, they come with multiple optics and a wide range of accessories.

With their ultra-thin and narrow border design, our luminaires seamlessly blend with the ceiling, creating a sleek and integrated look.

Finish

Powder coated finish in white (W), black (B).

Optional



Optic

Lens.
Beam Angle: 15° / 24° / 36° / 50°.

Driver

Supplied with non-dimmable remote driver.
Driver unit exceeds luminaire aperture; install above ceiling using extension cable.
Dimming Options: ON/OFF | 0-10V | DALI | TRIAC | CASAMBI.
220-240V 50/60Hz.

Accessories

N/A

LED Sources




Light source options: High-power LED or COB LED.
CRI: 95 or 97 | CCT: 2700K / 3000K / 3500K / 4000K.
Additional CRI and CCT options available upon request.

Applications

Its concealed light source for high visual comfort ensures this luminaire blends seamlessly into its architectural environment. With the added flexibility of light aiming.
Application areas: Corridors, retail, showrooms, residential, restaurants, hotels.

Harrow

Adjustable Recessed

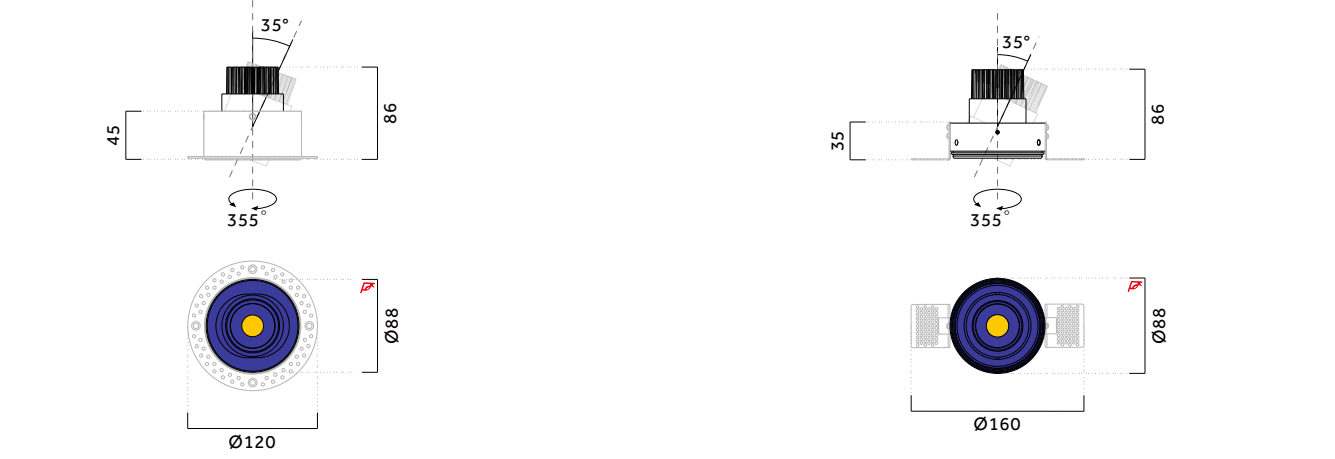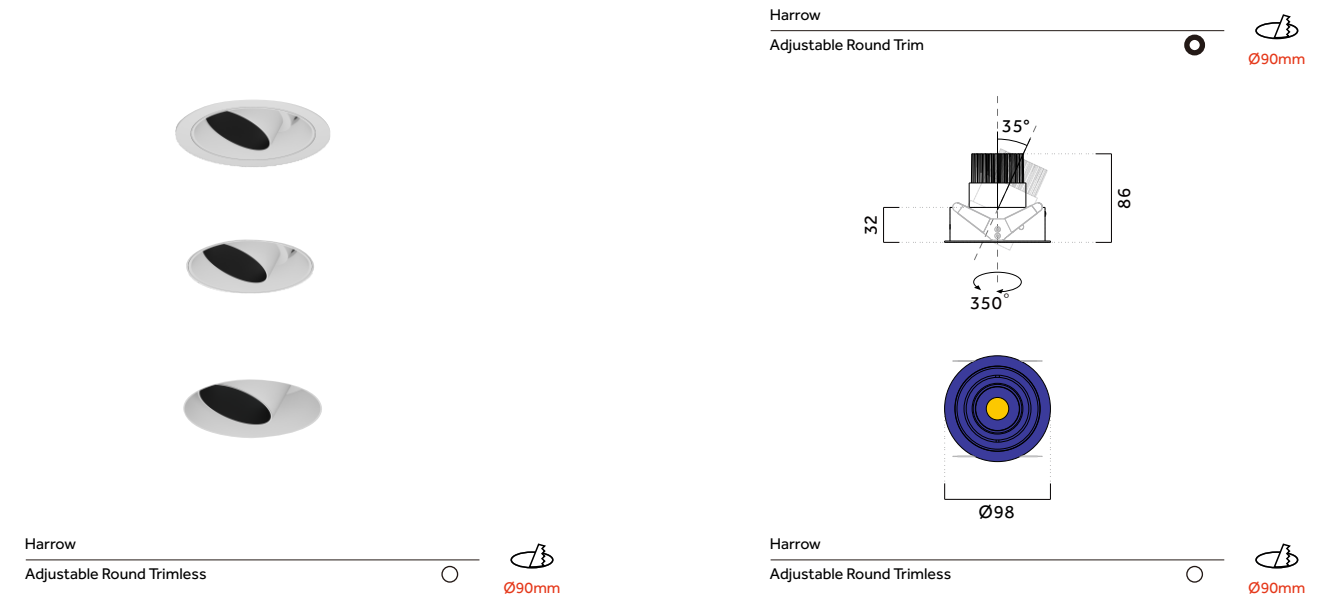


Code ordering example: **** . 9 0 0 1 . *** (Trim) **** . 9 0 0 2 . *** (Trimless Round)
**** . 9 0 0 3 . *** (Trimless Adjustable Arm)

	Product code	LED Power	Delivered Lumen	Finish	Cup	Beam Angle (BA°)	CCT Options	Dimming Options
Harrow Round Adjustable	02 Trim	Max.10W	1000lm	W White	W White	15 15°	27 2700K	0 ON/OFF
	11 Trimless			B Black	B Black	24 24°	30 3000K	1 0-10V
						36 36°	35 3500K	D DALI
						50 50°	40 4000K	T TRIAC C CASAMBI

Harrow

Adjustable Recessed

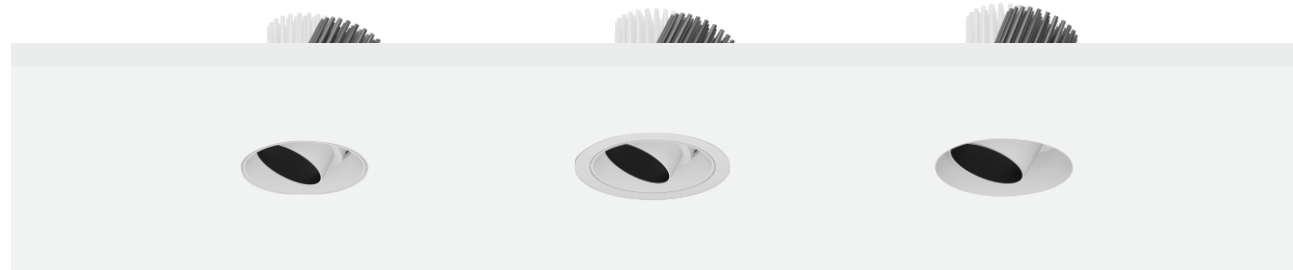

Body

These adjustable luminaires are perfect for extraordinary accent lighting in varied settings. Featuring excellent luminous efficiency and an exclusive aesthetic, they come with multiple optics and a wide range of accessories.

With their ultra-thin and narrow border design, our luminaires seamlessly blend with the ceiling, creating a sleek and integrated look.

Finish

Powder coated finish in white (W), black (B).

Optional



Optic

Lens.
Beam Angle: 15° / 24° / 36° / 50°.

Driver

Supplied with non-dimmable remote driver.
Driver unit exceeds luminaire aperture; install above ceiling using extension cable.
Dimming Options: ON/OFF | 0-10V | DALI | TRIAC | CASAMBI.
220-240V 50/60Hz.

Accessories

N/A

LED Sources




Light source options: High-power LED or COB LED.
CRI: 95 or 97 | CCT: 2700K / 3000K / 3500K / 4000K.
Additional CRI and CCT options available upon request.

Applications

Its concealed light source for high visual comfort ensures this luminaire blends seamlessly into its architectural environment. With the added flexibility of light aiming.
Application areas: Corridors, retail, showrooms, residential, restaurants, hotels.

Harrow

Adjustable Recessed

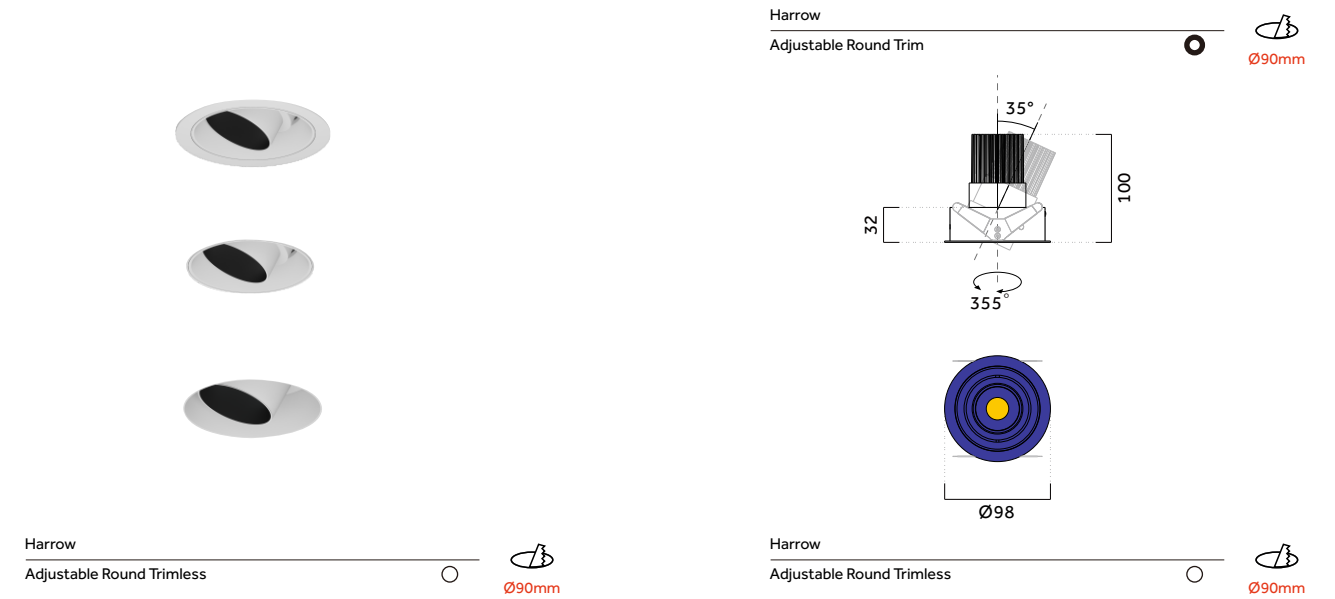


Code ordering example: **** . 9 0 0 4 . * * * * * *** (Trim) **** . 9 0 0 5 . * * * * * *** (Trimless Round)
**** . 9 0 0 6 . * * * * * *** (Trimless Adjustable Arm)

	Product code	LED Power	Delivered Lumen	Finish	Cup	Beam Angle (BA°)	CCT Options	Dimming Options
Harrow Round Adjustable	02 Trim	Max.15W	1500lm	W White	W White	15 15°	27 2700K	0 ON/OFF
	11 Trimless			B Black	B Black	24 24°	30 3000K	1 0-10V
						36 36°	35 3500K	D DALI
						50 50°	40 4000K	T TRIAC C CASAMBI

Harrow

Adjustable Recessed

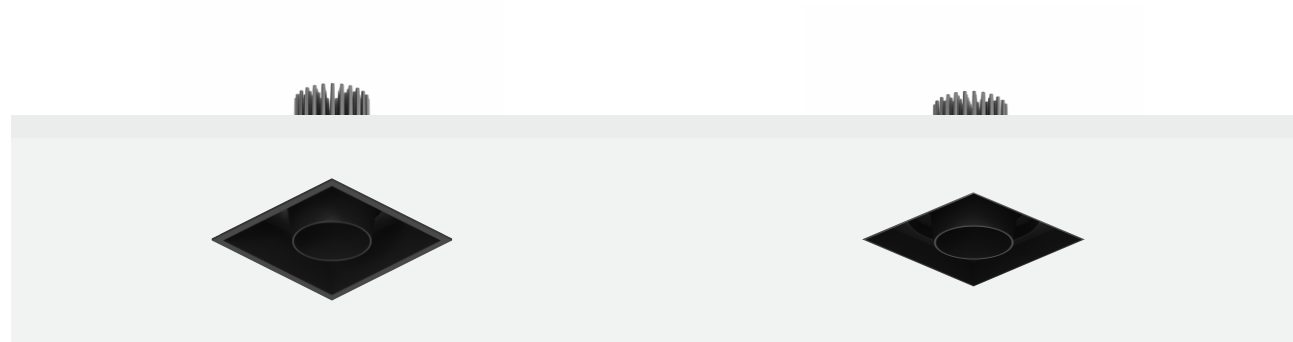

Body

Featuring high-definition recessed optics housed in metallic-finish thermoplastic and integrated with an anti-glare screen for exceptional visual comfort during positioning.

Designed for flush mounting in false ceilings (1-25 mm thickness) with a reliable steel spring mounting system.

The adjustable lamp body includes an extruded aluminum heat sink and provides ±30° horizontal tilt plus 355° rotation, all supported by a robust external die-cast aluminum frame.

Optic

Lens.
Beam Angle: 15° / 24° / 36° / 50°.

LED Sources

Light source options: High-power LED or COB LED.
CRI: 95 or 97 | CCT: 2700K / 3000K / 3500K / 4000K.
Additional CRI and CCT options available upon request.

Finish

Powder coated finish in white (W), black (B).

Optional

N/A

Driver

Supplied with non-dimmable remote driver.
Driver unit exceeds luminaire aperture; install above ceiling using extension cable.
Dimming Options: ON/OFF | 0-10V | DALI | TRIAC | CASAMBI.
220-240V 50/60Hz.

Accessories





N/A

Applications

Its concealed light source for high visual comfort ensures this luminaire blends seamlessly into its architectural environment. With the added flexibility of light aiming.
Application areas: Corridors, retail, showrooms, residential, restaurants, hotels.

Harrow

Adjustable Recessed

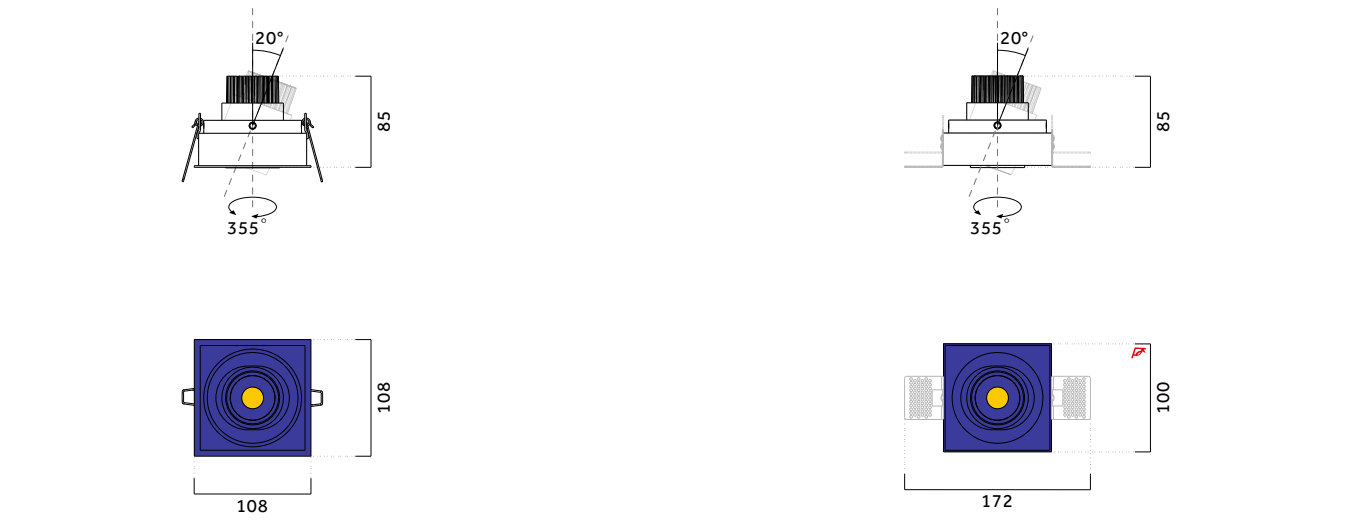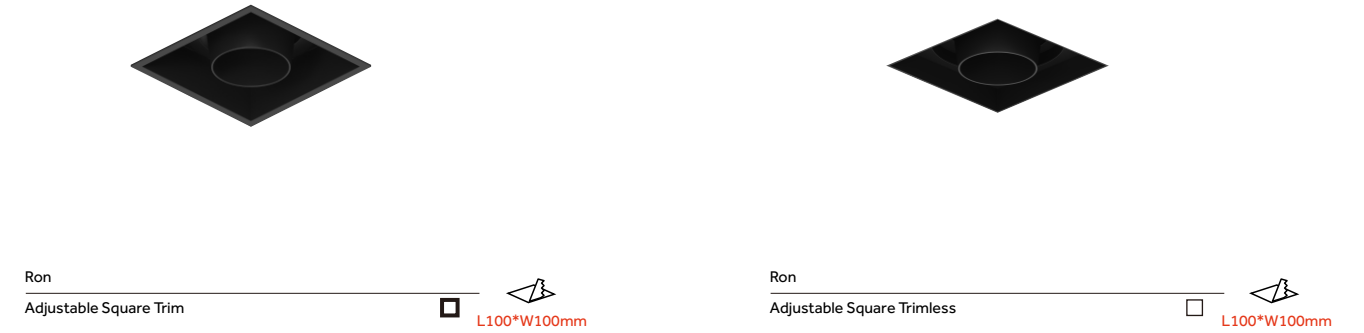


Code ordering example: * * . 1 0 8 5 . * * * * * *

	Product code	LED Power	Delivered Lumen	Finish	Cup	Beam Angle (BA°)	CCT Options	Dimming Options
Harrow Square Adjustable	02 Trim	Max.10W	1000lm	W White	W White	15 15°	27 2700K	0 ON/OFF
	11 Trimless			B Black	B Black	24 24°	30 3000K	1 0-10V
						36 36°	35 3500K	D DALI
						50 50°	40 4000K	T TRIAC
							C CASAMBI	

Harrow

Adjustable Recessed

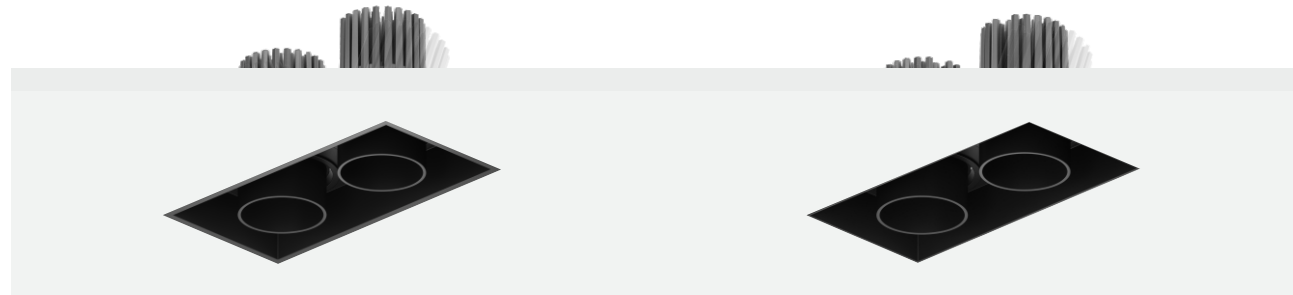

Body

Featuring high-definition recessed optics housed in metallic-finish thermoplastic and integrated with an anti-glare screen for exceptional visual comfort during positioning.

Designed for flush mounting in false ceilings (1-25 mm thickness) with a reliable steel spring mounting system.

The adjustable lamp body includes an extruded aluminum heat sink and provides $\pm 30^\circ$ horizontal tilt plus 355° rotation, all supported by a robust external die-cast aluminum frame.

Optic

Lens.
Beam Angle: $15^\circ / 24^\circ / 36^\circ / 50^\circ$.

LED Sources

Light source options: High-power LED or COB LED.
CRI: 95 or 97 | CCT: 2700K / 3000K / 3500K / 4000K.
Additional CRI and CCT options available upon request.

Finish

Powder coated finish in white (W), black (B).

Optional

N/A

Driver

Supplied with non-dimmable remote driver.
Driver unit exceeds luminaire aperture; install above ceiling using extension cable.
Dimming Options: ON/OFF | 0-10V | DALI | TRIAC | CASAMBI.
220-240V 50/60Hz.

Accessories


N/A

Applications

Its concealed light source for high visual comfort ensures this luminaire blends seamlessly into its architectural environment. With the added flexibility of light aiming.
Application areas: Corridors, retail, showrooms, residential, restaurants, hotels.

Harrow






Adjustable Recessed



Ron
Adjustable Square Trim L200*W100mm




Ron
Adjustable Square Trimless L200*W100mm

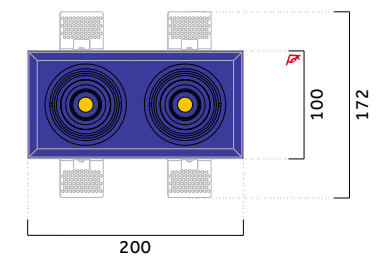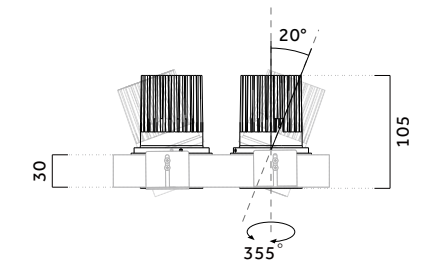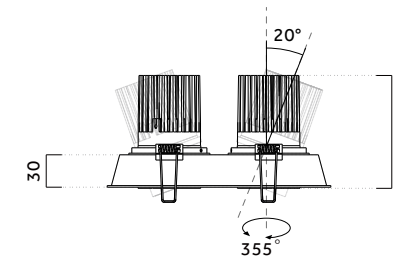

Code ordering example: * * . 2 0 0 5 . * * * * * *


	Product code	LED Power	Delivered Lumen	Finish	Cup	Beam Angle (BA°)	CCT Options	Dimming Options
Harrow Square Adjustable	02 Trim	Max.2*15W	3000lm	W White	W White	15 15°	27 2700K	0 ON/OFF
	11 Trimless			B Black	B Black	24 24°	30 3000K	1 0-10V
						36 36°	35 3500K	D DALI
						50 50°	40 4000K	T TRIAC C CASAMBI

Installation Schemes

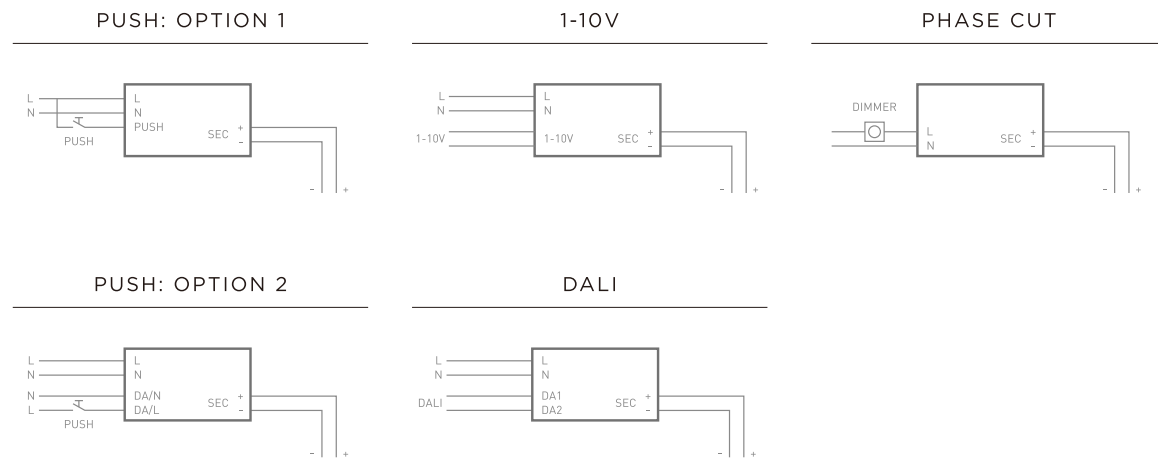


Connection Tips

SEVERAL FIXTURES CONNECTION TO A SINGLE CONSTANT CURRENT DRIVER

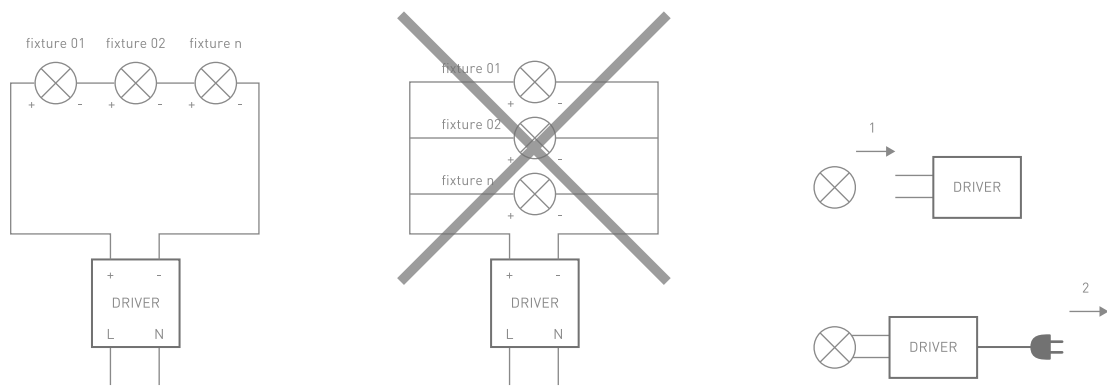

Trimless Mounting

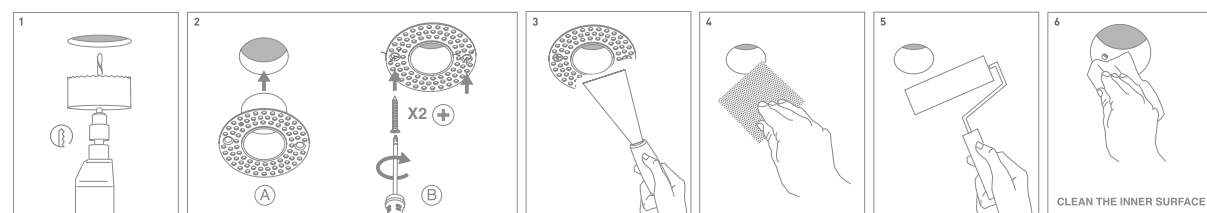

Publication date: December 2025

©Copyright OBT Lighting

Thanks to all contributors for the realization of this catalogue.

Designed by the Graphic Design Department of OBT Lighting.

No part of this catalogue may be reproduced without the written authorization of OBT Lighting.



OBT LIGHTING LIMITED

Unit G1 Capital House 61
Amhurst Road, London,
United Kingdom, E8 1LL
Hotline : 400 090 2289
Email : obt@obt.ltd

www.obt.ltd

Office 5, 8/F, Mega Cube,
8 Wang Kwong Road, Kowloon
Bay, Kowloon, Hong Kong
Hotline : 400 090 2289
Email : obt@obt.ltd

www.obt.ltd



Floor 2, No. 979, Yunhan
Road, Lingang New District,
China (Shanghai) pilot Free
Trade Zone
Hotline : 400 090 2289
Email : obt@obt.ltd

www.obt.ltd

Room 201, building 3, No. 67,
Luoja Nanyue street, Dalong
street, Panyu District,
Guangzhou
Hotline : 400 090 2289
Email : obt@obt.ltd

www.obt.ltd