

OBT
DESIGN

THE NATURAL EVOLUTION FROM THE LIGHT
SHADOW DOTS. THEY OFFER EXTREMELY
HIGH EFFECTIVENESS DESPITE THEIR SMALL
SIZE AND COMPACT BODY.

OBT
DESIGN

2019-01-20



Cabin S

Adjustable Recessed



Body

Round cast aluminum mounting trim with spring-loaded clips for trim installation, or brackets for trimless installation. Suitable for ceiling thicknesses of 1–24 mm.

Luminaire body inclusive of snoot in cast aluminum.

Easy relamping via removable front ring with snap-in catch mechanism.

Available in two sizes with cut diameters of 70mm and 120mm.

Tiltable in directions up to 35°.

Optic

Lens.
Beam Angle: 13° / 24° / 38° / 50°.

LED Sources

Light source options: High-power LED or COB LED.
CRI: 95 or 97 | CCT: 2700K / 3000K / 3500K / 4000K.
Additional CRI and CCT options available upon request.

Finish

Powder coated finish in matt white (W), matt black (B), matt gold (G), matt copper (C), matt silver (S).

Driver

Supplied with non-dimmable remote driver.
Driver unit exceeds luminaire aperture; install above ceiling using extension cable.
Dimming Options: ON/OFF | 0-10V | DALI | TRIAC | CASAMBI.
220-240V 50/60Hz.

Accessories


N/A

Applications

The concealed light source ensures high visual comfort and allows the luminaire to blend seamlessly into its architectural environment, with the added flexibility of adjustable light aiming.

Optional

Trimless



Trimles



Matte White



Matte Black



Matte Gold



Matte Copper



Matte Silver







Cabin S

Adjustable Recessed



Cabin S Adjustable Round Trim Ø70mm

Cabin S Adjustable Round Trimless Ø120mm

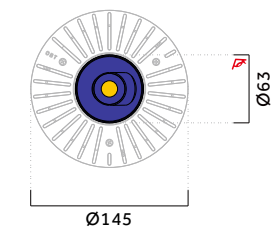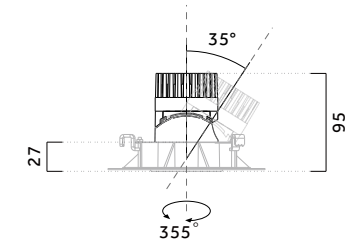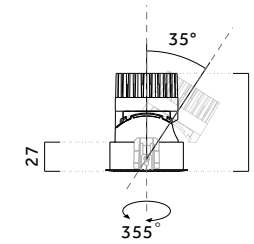

Code ordering example: * * . 7 0 9 5 . * * * * * *

	Product code	LED Power	Delivered Lumen	Finish	Cup	Beam Angle (BA°)	CCT Options	Dimming Options
Cabin Round Adjustable	02 Trim	Max.12W	1020lm	W White	W White	13 13°	27 2700K	0 ON/OFF
	11 Trimless			B Black	B Black	24 24°	30 3000K	1 0-10V
					G Gold	38 38°	35 3500K	D DALI
					C Copper	50 50°	40 4000K	T TRIAC
					S Silver			C CASAMBI

Cabin S

Adjustable Recessed



Body

Round cast aluminum mounting trim with spring-loaded clips for trim installation, or brackets for trimless installation. Suitable for ceiling thicknesses of 1–24 mm.

Luminaire body inclusive of snout in cast aluminum.

Easy relamping via removable front ring with snap-in catch mechanism.

Available in two sizes with cut diameters of 70mm and 120mm.

Tiltable in directions up to 35°.

Optic

Lens.
Beam Angle: 13° / 24° / 38° / 50°.

LED Sources

Light source options: High-power LED or COB LED.
CRI: 95 or 97 | CCT: 2700K / 3000K / 3500K / 4000K.
Additional CRI and CCT options available upon request.

Finish

Powder coated finish in matt white (W), matt black (B), matt gold (G), matt copper (C), matt silver (S).

Driver

Supplied with non-dimmable remote driver.
Driver unit exceeds luminaire aperture; install above ceiling using extension cable.
Dimming Options: ON/OFF | 0-10V | DALI | TRIAC | CASAMBI.
220-240V 50/60Hz.

Accessories


N/A

Applications

The concealed light source ensures high visual comfort and allows the luminaire to blend seamlessly into its architectural environment, with the added flexibility of adjustable light aiming.

Optional

Trimless



Trimles



Matte White



Matte Black



Matte Gold



Matte Copper




Matte Silver




Cabin S




Adjustable Recessed



Cabin S
Adjustable Round Trim Ø70mm

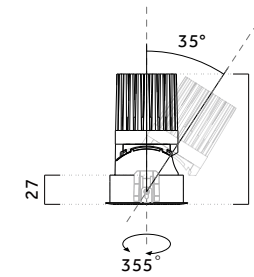

Cabin S
Adjustable Round Trimless Ø120mm

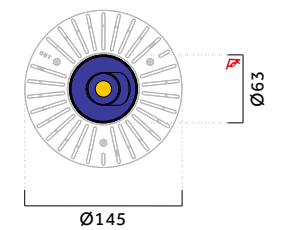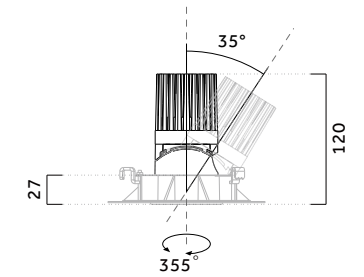


Code ordering example: * * . 7 0 2 0 . * * * * * *

	Product code	LED Power	Delivered Lumen	Finish	Cup	Beam Angle (BA°)	CCT Options	Dimming Options
Cabin Round Adjustable	02 Trim	Max.15W	1275lm	W White	W White	13 13°	27 2700K	0 ON/OFF
	11 Trimless			B Black	B Black	24 24°	30 3000K	1 0-10V
					G Gold	38 38°	35 3500K	D DALI
					C Copper	50 50°	40 4000K	T TRIAC
					S Silver			C CASAMBI

Cabin S

Adjustable Recessed

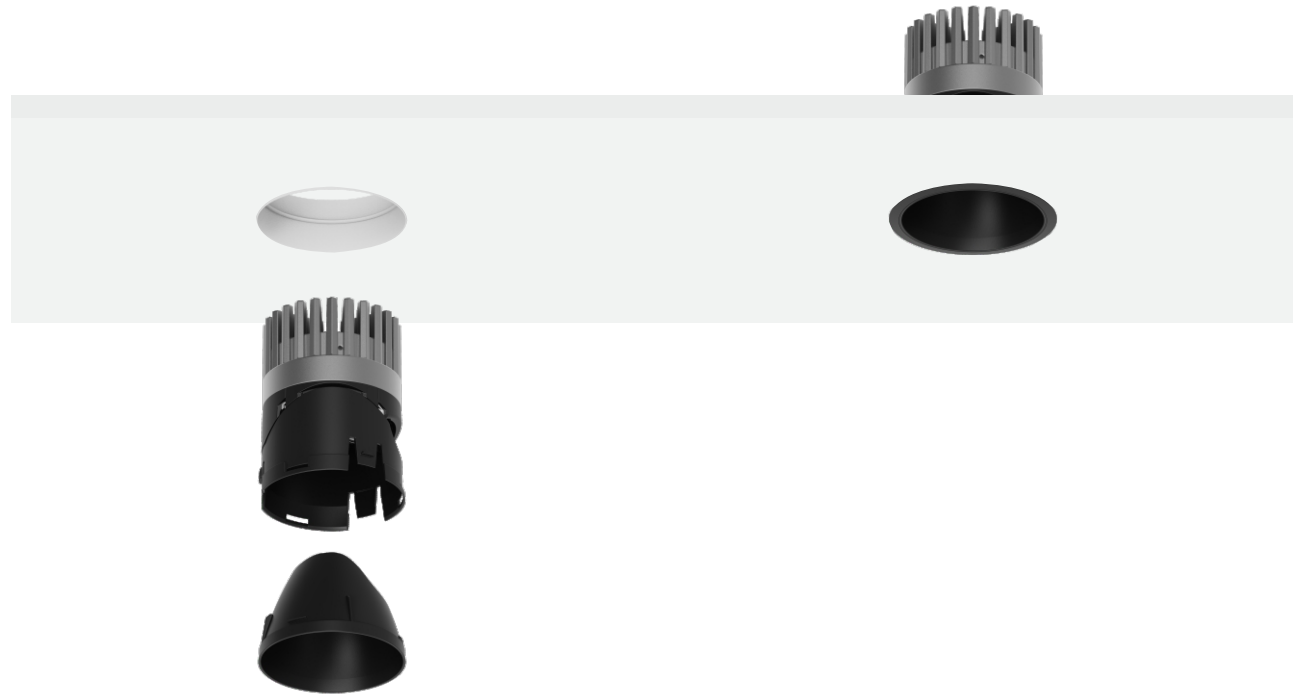

Body

Round cast aluminum mounting trim with spring-loaded clips for trim installation, or brackets for trimless installation. Suitable for ceiling thicknesses of 1–24 mm.

Luminaire body inclusive of snoot in cast aluminum.

Easy relamping via removable front ring with snap-in catch mechanism.

Available in two sizes with cut diameters of 70mm and 120mm.

Tiltable in directions up to 35°.

Optic

Lens.
Beam Angle: 13° / 24° / 36° / 50°.

LED Sources

Light source options: High-power LED or COB LED.
CRI: 95 or 97 | CCT: 2700K / 3000K / 3500K / 4000K.
Additional CRI and CCT options available upon request.

Finish

Powder coated finish in matt white (W), matt black (B), matt gold (G), matt copper (C), matt silver (S).

Driver

Supplied with non-dimmable remote driver.
Driver unit exceeds luminaire aperture; install above ceiling using extension cable.
Dimming Options: ON/OFF | 0-10V | DALI | TRIAC | CASAMBI.
220-240V 50/60Hz.

Accessories

N/A

Applications



The concealed light source ensures high visual comfort and allows the luminaire to blend seamlessly into its architectural environment, with the added flexibility of adjustable light aiming.

Optional

- Trimless
- Trimles
- Matte White
- Matte Black
- Matte Gold
- Matte Copper
- Matte Silver

Cabin S

Adjustable Recessed

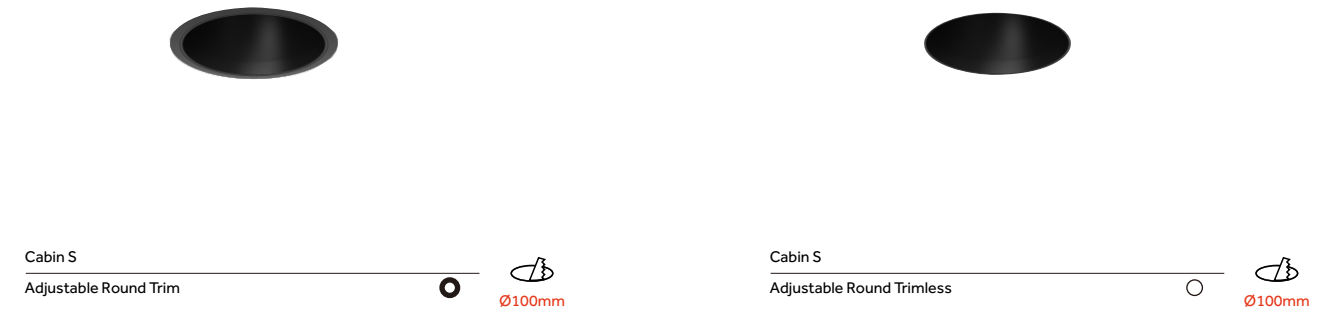


Code ordering example: * * . 1 0 3 0 . * * * * * *

	Product code	LED Power	Delivered Lumen	Finish	Cup	Beam Angle (BA°)	CCT Options	Dimming Options
Cabin S Round Adjustable	02 Trim	Max.20W	1700lm	W White	W White	15 15°	27 2700K	0 ON/OFF
	11 Trimless			B Black	B Black	24 24°	30 3000K	1 0-10V
					G Gold	36 36°	35 3500K	D DALI
					C Copper	50 50°	40 4000K	T TRIAC
					S Silver			C CASAMBI

Cabin S

Adjustable Recessed

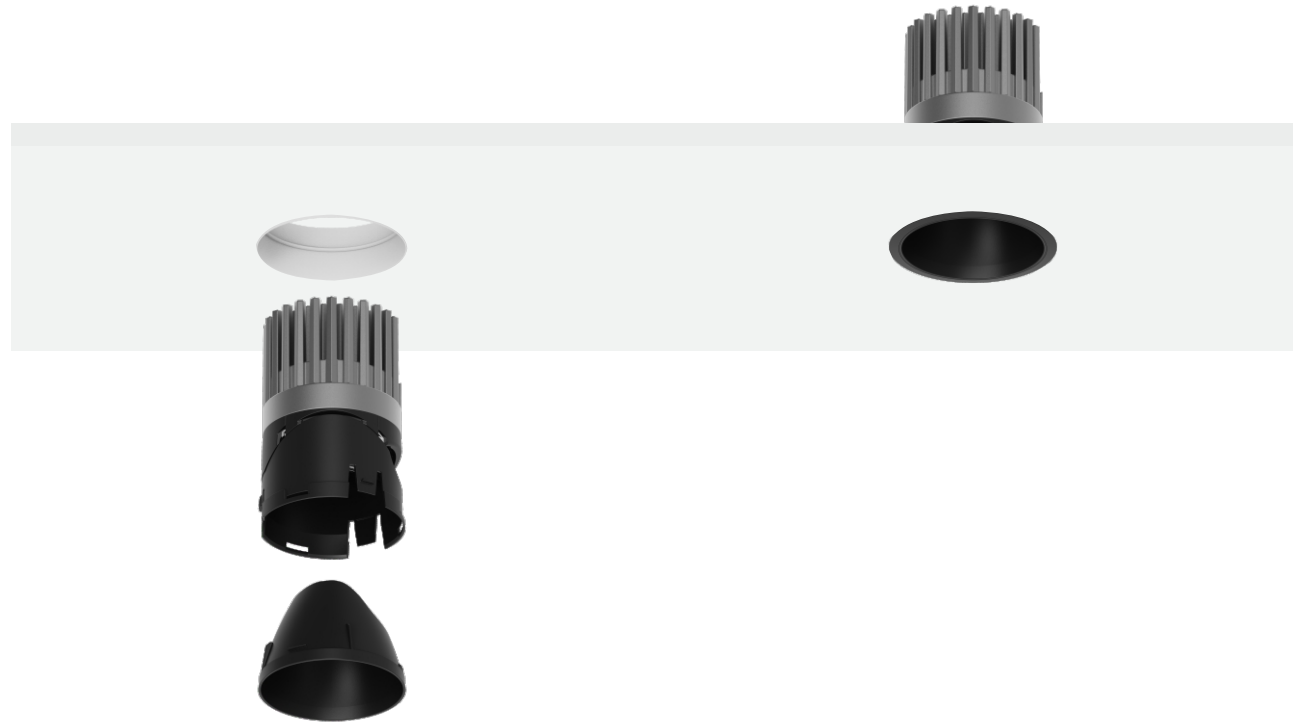

Body

Round cast aluminum mounting trim with spring-loaded clips for trim installation, or brackets for trimless installation. Suitable for ceiling thicknesses of 1–24 mm.

Luminaire body inclusive of snoot in cast aluminum.

Easy relamping via removable front ring with snap-in catch mechanism.

Available in two sizes with cut diameters of 70mm and 120mm.

Tiltable in directions up to 35°.

Optic

Lens.
Beam Angle: 13° / 24° / 36° / 50°.

LED Sources

Light source options: High-power LED or COB LED.
CRI: 95 or 97 | CCT: 2700K / 3000K / 3500K / 4000K.
Additional CRI and CCT options available upon request.

Finish

Powder coated finish in matt white (W), matt black (B), matt gold (G), matt copper (C), matt silver (S).

Driver

Supplied with non-dimmable remote driver.
Driver unit exceeds luminaire aperture; install above ceiling using extension cable.
Dimming Options: ON/OFF | 0-10V | DALI | TRIAC | CASAMBI.
220-240V 50/60Hz.

Accessories

N/A

Applications


The concealed light source ensures high visual comfort and allows the luminaire to blend seamlessly into its architectural environment, with the added flexibility of adjustable light aiming.

Optional

- Trimless
- Trimles
- Matte White
- Matte Black
- Matte Gold
- Matte Copper
- Matte Silver





Cabin S

Adjustable Recessed



Cabin S Adjustable Round Trim Ø100mm


Cabin S Adjustable Round Trimless Ø100mm

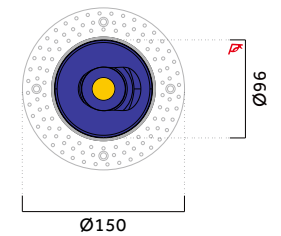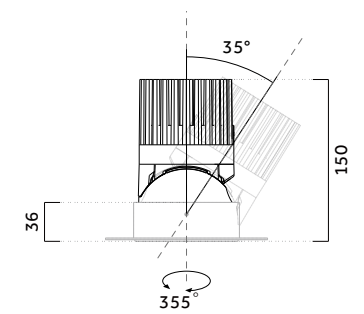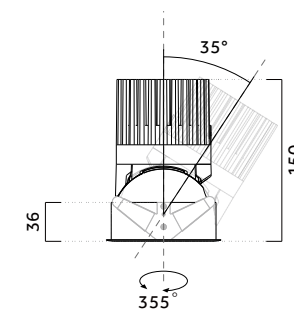

Code ordering example: * * . 1 0 5 0 . * * * * * *


	Product code	LED Power	Delivered Lumen	Finish	Cup	Beam Angle (BA°)	CCT Options	Dimming Options
Cabin S Round Adjustable	02 Trim	Max.30W	2550lm	W White	W White	15 15°	27 2700K	0 ON/OFF
	11 Trimless			B Black	B Black	24 24°	30 3000K	1 0-10V
					G Gold	36 36°	35 3500K	D DALI
					C Copper	50 50°	40 4000K	T TRIAC
					S Silver			C CASAMBI

Installation Schemes

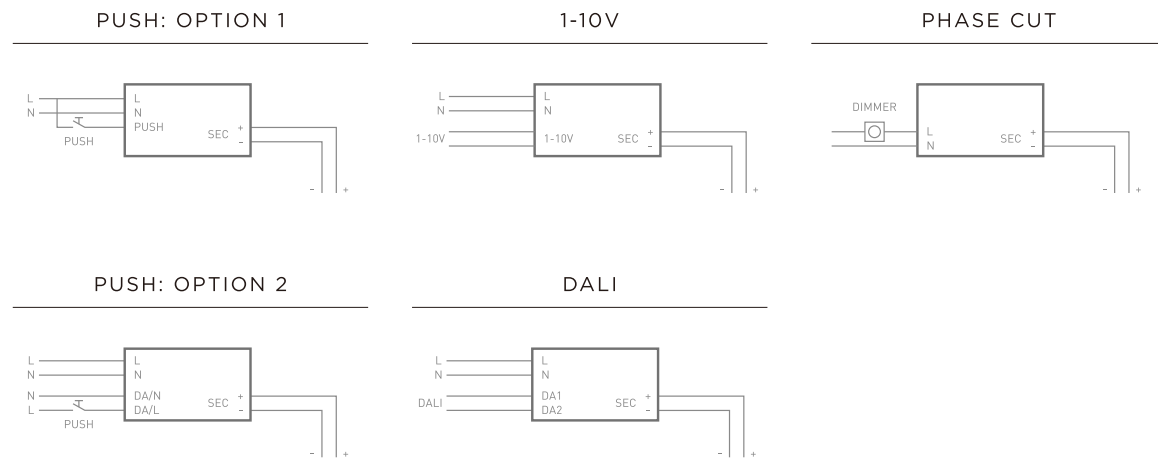


Connection Tips

SEVERAL FIXTURES CONNECTION TO A SINGLE CONSTANT CURRENT DRIVER

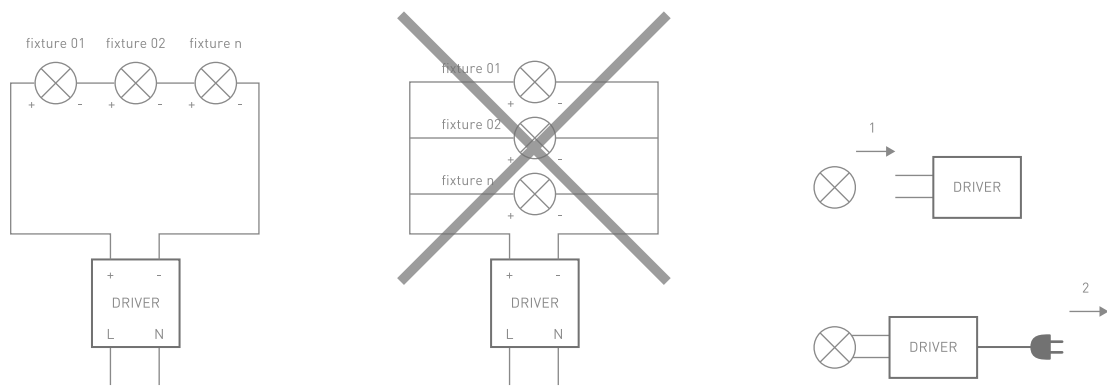

Trimless Mounting

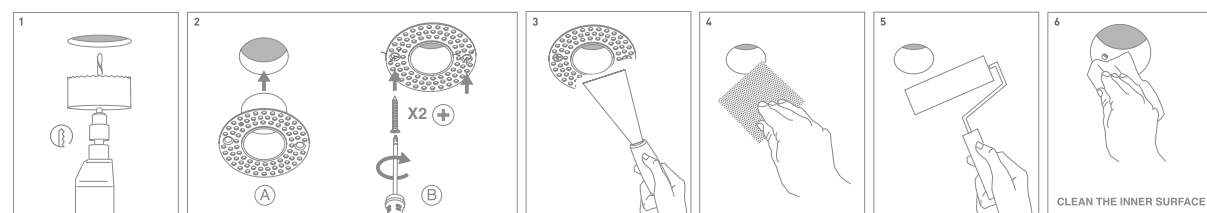

Publication date: December 2025

©Copyright OBT Lighting

Thanks to all contributors for the realization of this catalogue.

Designed by the Graphic Design Department of OBT Lighting.

No part of this catalogue may be reproduced without the written authorization of OBT Lighting.



OBT LIGHTING LIMITED

Unit G1 Capital House 61
Amhurst Road, London,
United Kingdom, E8 1LL
Hotline : 400 090 2289
Email : obt@obt.ltd

www.obt.ltd

Office 5, 8/F, Mega Cube,
8 Wang Kwong Road, Kowloon
Bay, Kowloon, Hong Kong
Hotline : 400 090 2289
Email : obt@obt.ltd

www.obt.ltd



Floor 2, No. 979, Yunhan
Road, Lingang New District,
China (Shanghai) pilot Free
Trade Zone
Hotline : 400 090 2289
Email : obt@obt.ltd

www.obt.ltd

Room 201, building 3, No. 67,
Luoja Nanyue street, Dalong
street, Panyu District,
Guangzhou
Hotline : 400 090 2289
Email : obt@obt.ltd

www.obt.ltd