


Cabin D




Light Up Life

Cabini D

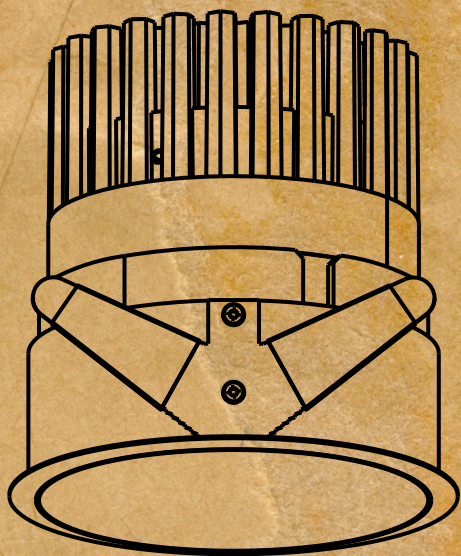

Cabin D

Fixed Recessed

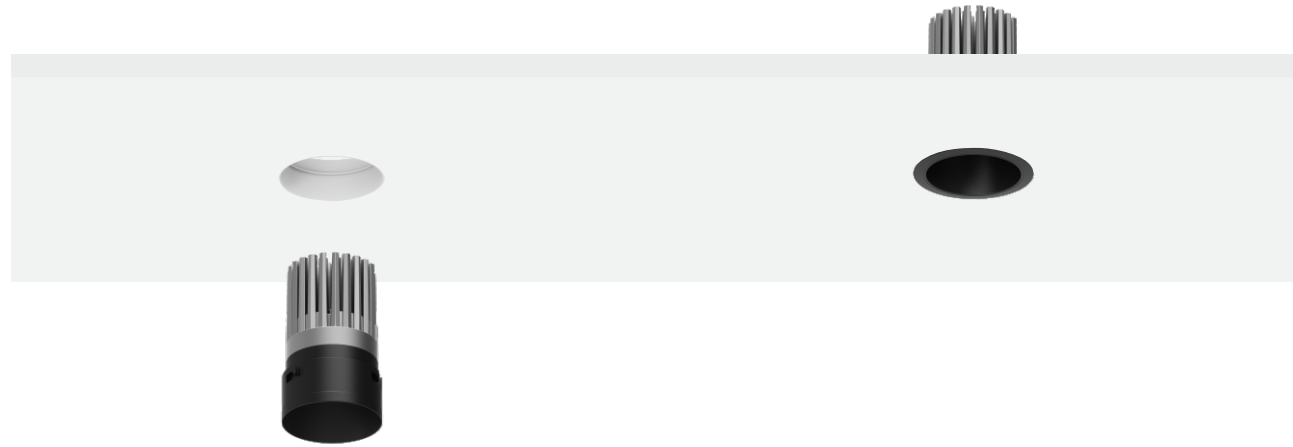

Body

The Cabin D downlight series comprises recessed fixtures characterized by essential forms, extensive range depth, excellent performance, and high efficiency. This comprehensive product line is particularly suited for commercial and retail environments where reliability, efficiency, and light quality are paramount.

The trim version features a visible stop ring with black or white finish options (depending on size). The ultra-thin ring is integrated into the fixture for seamless architectural integration.

Optic

Lens.
Beam Angle: 15° / 24° / 36° / 50°.

LED Sources

Light source options: High-power LED or COB LED.
CRI: 95 or 97 | CCT: 2700K / 3000K / 3500K / 4000K / 2700K-6500K (tunable white).
Additional CRI and CCT options available upon request.

Finish

Powder coated finish in matt white (W), matt black (B), matt gold (G), matt copper (C), matt silver (S).

Driver

Supplied with non-dimmable remote driver.
Driver unit exceeds luminaire aperture; install above ceiling using extension cable.
Dimming Options: ON/OFF | 0-10V | DALI | TRIAC | CASAMBI.
220-240V 50/60Hz.

Accessories





N/A

Applications

Its concealed light source for high visual comfort ensures this luminaire blends seamlessly into its architectural environment. With the added flexibility of light aiming.
Application areas: Corridors, retail, showrooms, residential, restaurants, hotels.

Cabin D

Fixed Recessed

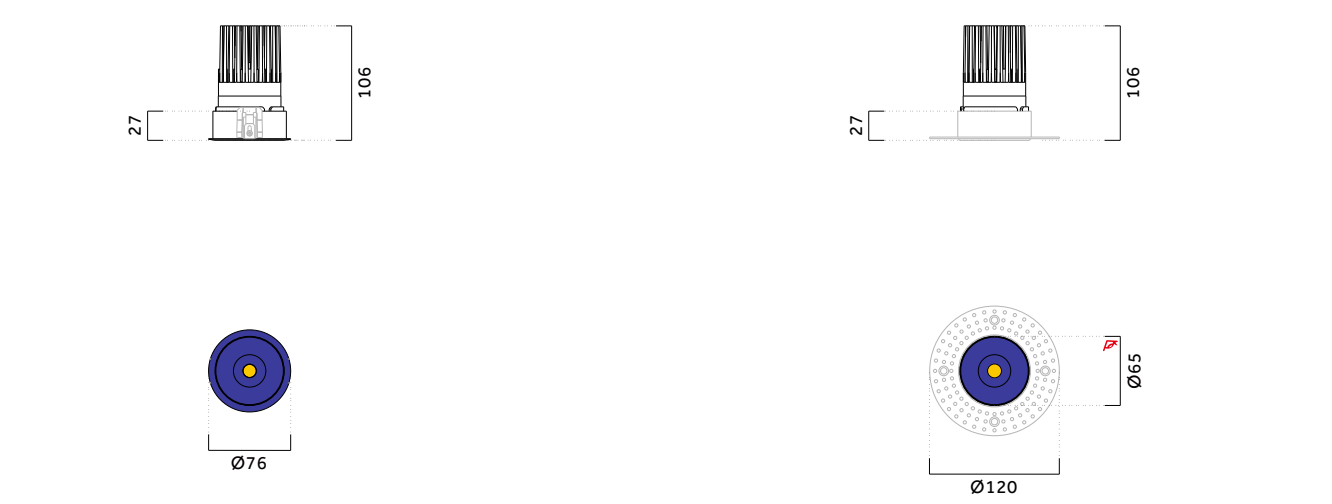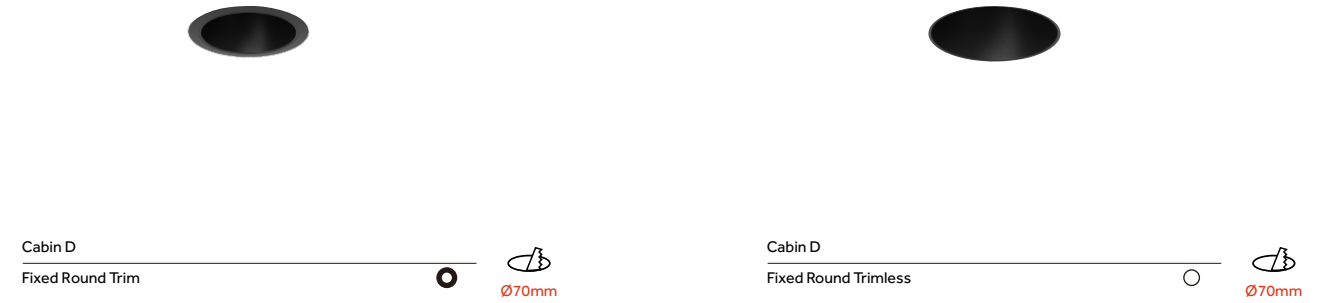


Code ordering example: * * . 7 0 0 6 . * * * * * *

	Product code	LED Power	Delivered Lumen	Finish	Cup	Beam Angle (BA°)	CCT Options	Dimming Options
Cabin D Round Fixed	01 Trim	Max.16W	1600lm	W White	W White	15 15°	27 2700K	0 ON/OFF
	30 Trimless			B Black	B Black	24 24°	30 3000K	1 0-10V
					G Gold	36 36°	35 3500K	D DALI
					C Copper	50 50°	40 4000K	T TRIAC
					S Silver		TW 2700K-6500K	C CASAMBI

Cabin D

Fixed Recessed

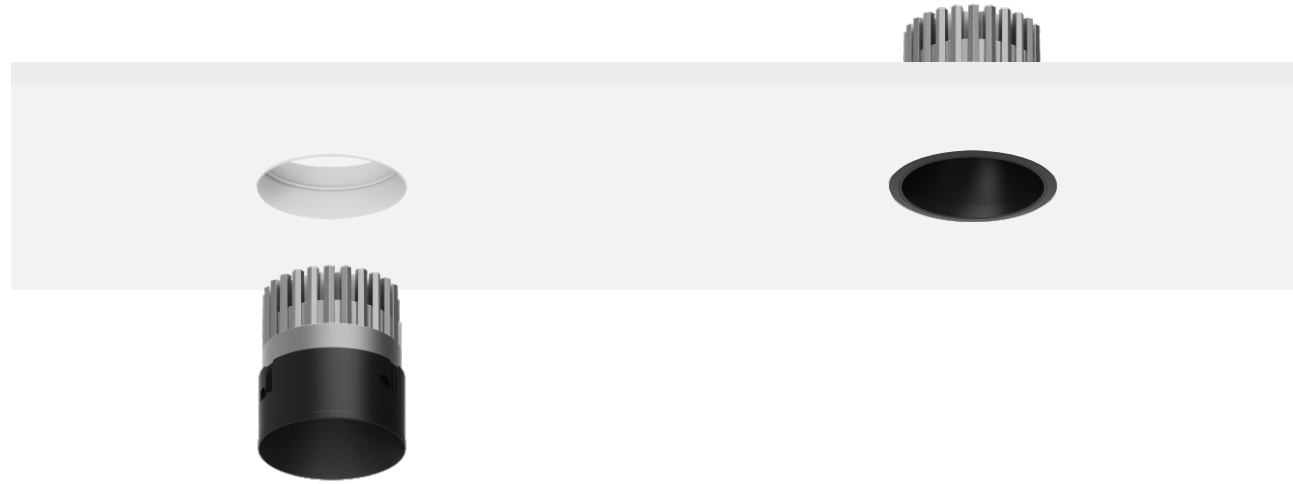

Body

The Cabin D downlight series comprises recessed fixtures characterized by essential forms, extensive range depth, excellent performance, and high efficiency. This comprehensive product line is particularly suited for commercial and retail environments where reliability, efficiency, and light quality are paramount.

The trim version features a visible stop ring with black or white finish options (depending on size). The ultra-thin ring is integrated into the fixture for seamless architectural integration.

Optic

Lens.
Beam Angle: 15° / 24° / 36° / 50°.

LED Sources

Light source options: High-power LED or COB LED.
CRI: 95 or 97 | CCT: 2700K / 3000K / 3500K / 4000K / 2700K-6500K (tunable white).
Additional CRI and CCT options available upon request.

Finish

Powder coated finish in matt white (W), matt black (B), matt gold (G), matt copper (C), matt silver (S).

Driver

Supplied with non-dimmable remote driver.
Driver unit exceeds luminaire aperture; install above ceiling using extension cable.
Dimming Options: ON/OFF | 0-10V | DALI | TRIAC | CASAMBI.
220-240V 50/60Hz.


Accessories

N/A

Applications







Its concealed light source for high visual comfort ensures this luminaire blends seamlessly into its architectural environment. With the added flexibility of light aiming.
Application areas: Corridors, retail, showrooms, residential, restaurants, hotels.

Optional



Cabin D

Fixed Recessed

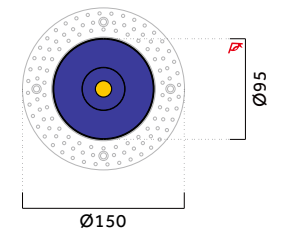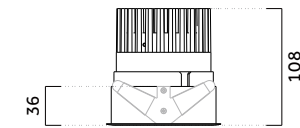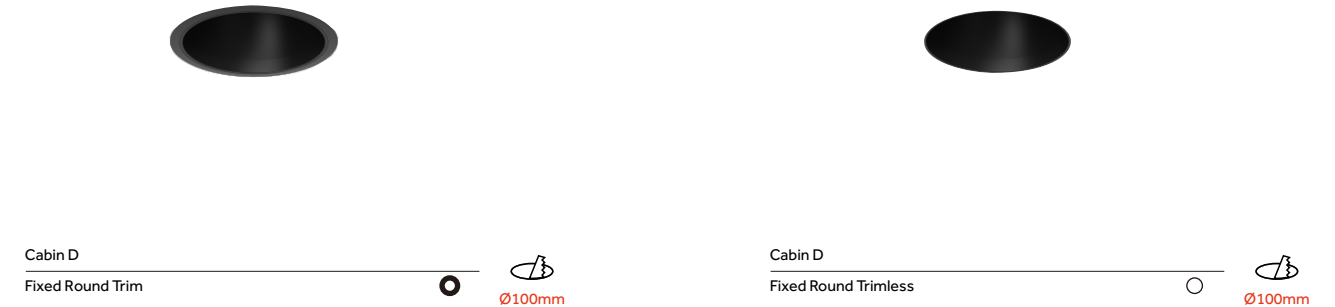


Code ordering example: * * . 1 0 0 8 . * * * * * *

	Product code	LED Power	Delivered Lumen	Finish	Cup	Beam Angle (BA°)	CCT Options	Dimming Options
Cabin D Round Fixed	01 Trim	Max.20W	2000lm	W White	W White	15 15°	27 2700K	0 ON/OFF
	30 Trimless			B Black	B Black	24 24°	30 3000K	1 0-10V
					G Gold	36 36°	35 3500K	D DALI
					C Copper	50 50°	40 4000K	T TRIAC
					S Silver		TW 2700K-6500K	C CASAMBI

Cabin D

Fixed Recessed

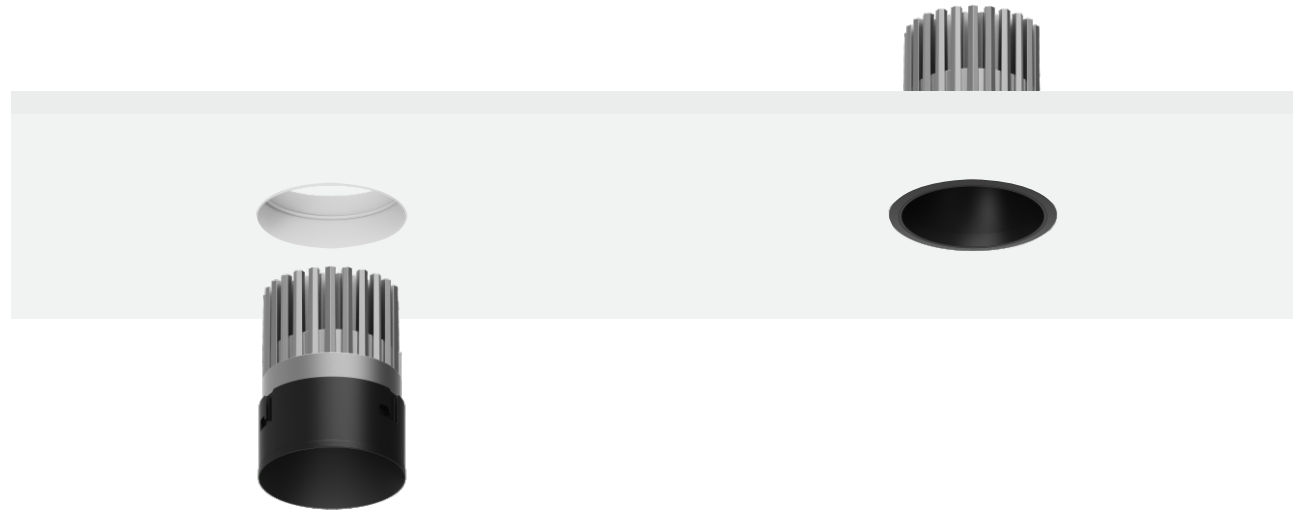

Body

The Cabin D downlight series comprises recessed fixtures characterized by essential forms, extensive range depth, excellent performance, and high efficiency. This comprehensive product line is particularly suited for commercial and retail environments where reliability, efficiency, and light quality are paramount.

The trim version features a visible stop ring with black or white finish options (depending on size). The ultra-thin ring is integrated into the fixture for seamless architectural integration.

Optic

Lens.
Beam Angle: 15° / 24° / 36° / 50°.

LED Sources

Light source options: High-power LED or COB LED.
CRI: 95 or 97 | CCT: 2700K / 3000K / 3500K / 4000K / 2700K-6500K (tunable white).
Additional CRI and CCT options available upon request.

Finish

Powder coated finish in matt white (W), matt black (B), matt gold (G), matt copper (C), matt silver (S).

Driver

Supplied with non-dimmable remote driver.
Driver unit exceeds luminaire aperture; install above ceiling using extension cable.
Dimming Options: ON/OFF | 0-10V | DALI | TRIAC | CASAMBI.
220-240V 50/60Hz.


Accessories

N/A

Applications







Its concealed light source for high visual comfort ensures this luminaire blends seamlessly into its architectural environment. With the added flexibility of light aiming.
Application areas: Corridors, retail, showrooms, residential, restaurants, hotels.

Optional



Cabin D


Fixed Recessed

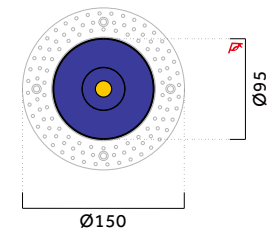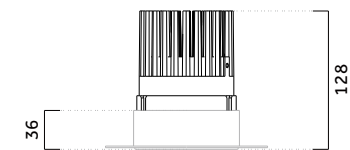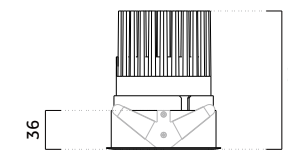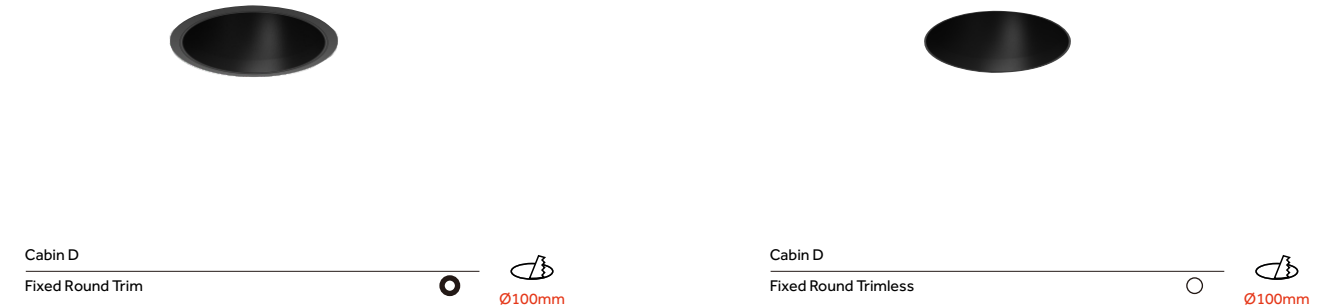

Code ordering example: * * . 1 0 2 8 . * * * * * *


	Product code	LED Power	Delivered Lumen	Finish	Cup	Beam Angle (BA°)	CCT Options	Dimming Options
Cabin D Round Fixed	01 Trim	Max.30W	3000lm	W White	W White	15 15°	27 2700K	0 ON/OFF
	30 Trimless			B Black	B Black	24 24°	30 3000K	1 0-10V
					G Gold	36 36°	35 3500K	D DALI
					C Copper	50 50°	40 4000K	T TRIAC
					S Silver		TW 2700K-6500K	C CASAMBI

Installation Schemes

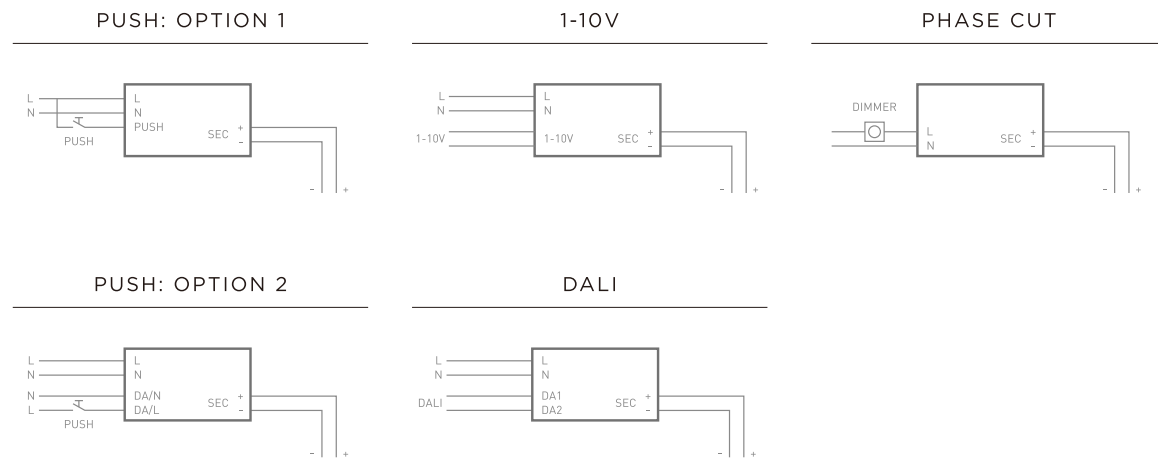


Connection Tips

SEVERAL FIXTURES CONNECTION TO A SINGLE CONSTANT CURRENT DRIVER

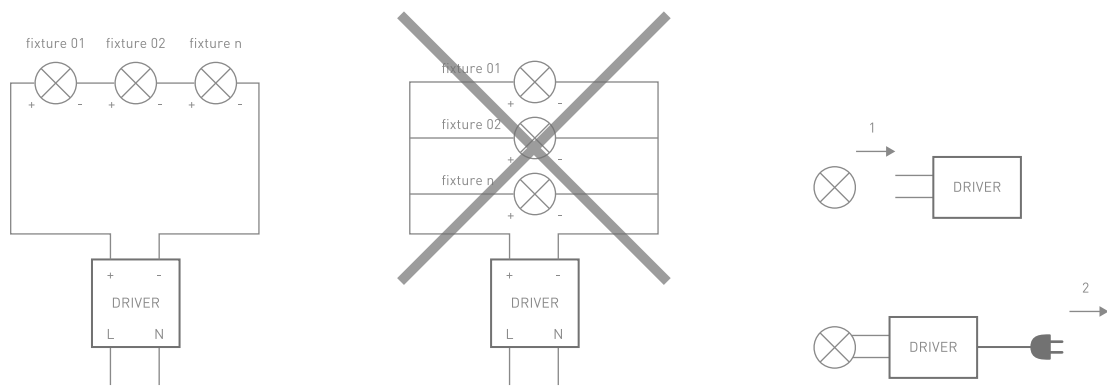

Trimless Mounting

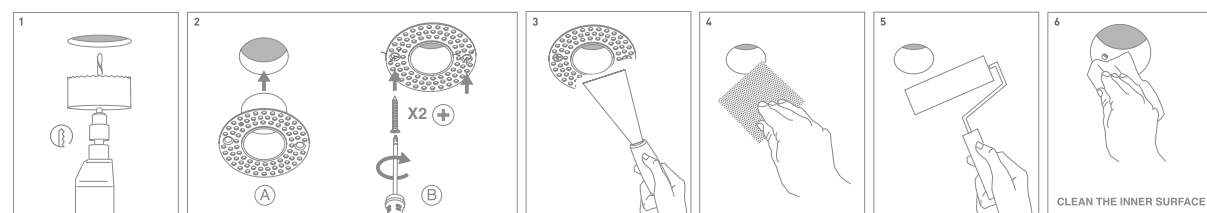

Publication date: December 2025

©Copyright OBT Lighting

Thanks to all contributors for the realization of this catalogue.

Designed by the Graphic Design Department of OBT Lighting.

No part of this catalogue may be reproduced without the written authorization of OBT Lighting.



OBT LIGHTING LIMITED

Unit G1 Capital House 61
Amhurst Road, London,
United Kingdom, E8 1LL
Hotline : 400 090 2289
Email : obt@obt.ltd

www.obt.ltd

Office 5, 8/F, Mega Cube,
8 Wang Kwong Road, Kowloon
Bay, Kowloon, Hong Kong
Hotline : 400 090 2289
Email : obt@obt.ltd

www.obt.ltd



Floor 2, No. 979, Yunhan
Road, Lingang New District,
China (Shanghai) pilot Free
Trade Zone
Hotline : 400 090 2289
Email : obt@obt.ltd

www.obt.ltd

Room 201, building 3, No. 67,
Luoja Nanyue street, Dalong
street, Panyu District,
Guangzhou
Hotline : 400 090 2289
Email : obt@obt.ltd

www.obt.ltd