


Reflector
Cabin R




TO PROVIDE A **COMFORTABLE**
SPACE FOR YOU WHO HAVE BEEN
BUSY WITH GREEN WORK ALL DAY

CabinR

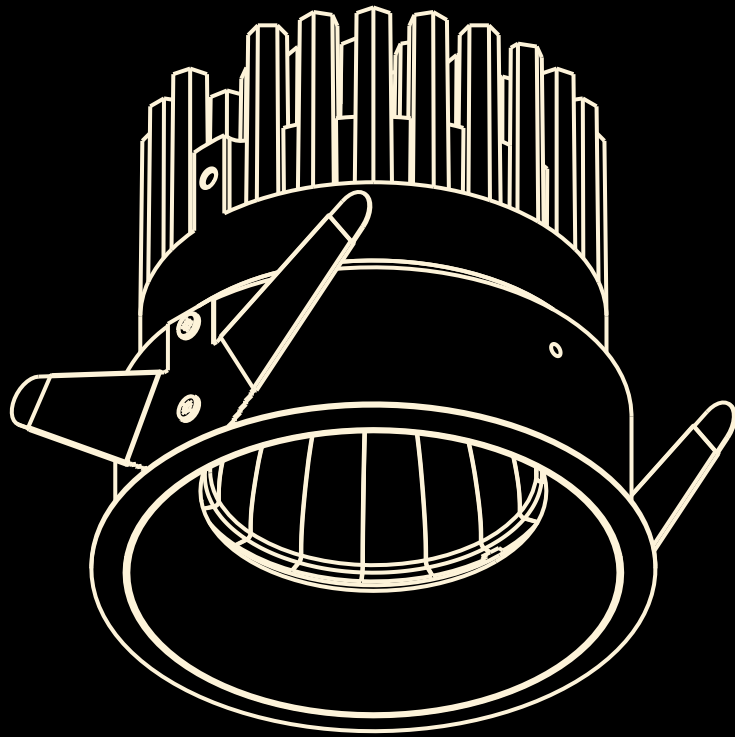

Cabin R

Fixed Recessed

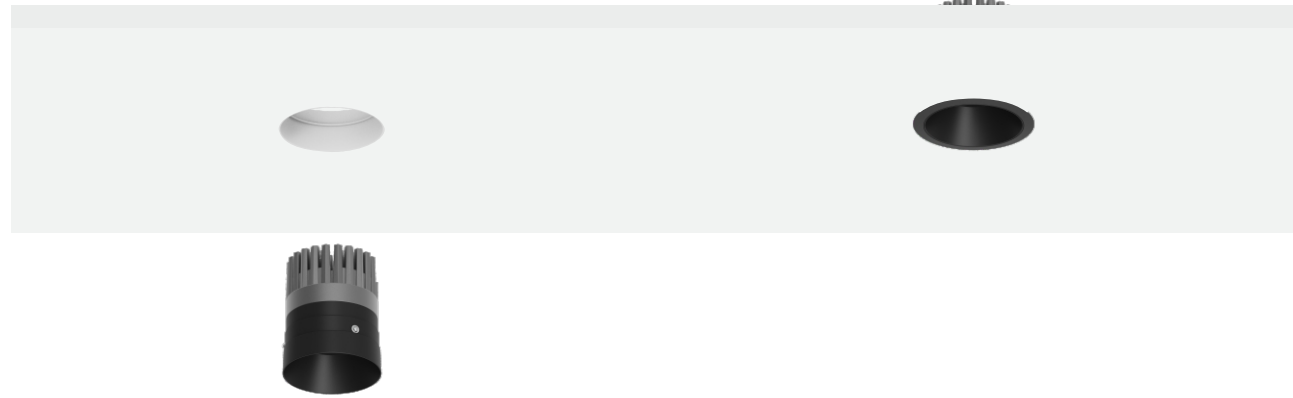

Body

The Cabin R features a fixed circular design with a visually simple, seamless form that ensures excellent visual comfort. The versatile reflector cup version maintains a uniform appearance across all configurations.

Available in decorative and non-decorative versions with diameters of Ø70 mm, Ø120 mm, and Ø150 mm. The main body is constructed from lightweight die-cast aluminum.

Optic

Reflector.
Beam Angle: 28° / 38° / 55°.

LED Sources

Light source options: High-power LED or COB LED.
CRI: 95 or 97 | CCT: 2700K / 3000K / 3500K / 4000K.
Additional CRI and CCT options available upon request.

Finish

Powder coated finish in matt white (W), matt black (B), matt gold (G), matt copper (C), matt silver (S).

Driver

Supplied with non-dimmable remote driver.
Driver unit exceeds luminaire aperture; install above ceiling using extension cable.
Dimming Options: ON/OFF | 0-10V | DALI | TRIAC | CASAMBI.
220-240V 50/60Hz.

Accessories

N/A

Applications

Its concealed light source for high visual comfort ensures this luminaire blends seamlessly into its architectural environment. With the added flexibility of light aiming.
Application areas: Corridors, retail, showrooms, residential, restaurants, hotels.

Optional

Trimless




Trimles






Cabin R

Fixed Recessed



Cabin R
Fixed Round Trim Ø70mm

Cabin R
Fixed Round Trimless Ø120mm

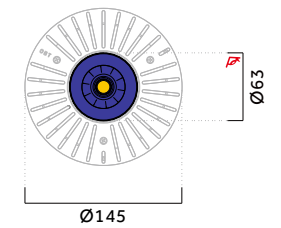


Code ordering example: * * . 7 0 7 6 . * * * * * *

	Product code	LED Power	Delivered Lumen	Finish	Cup	Beam Angle (BA°)	CCT Options	Dimming Options
Cabin R Round Fixed	01 Trim	Max.12W	1320lm	W White	W White	28 28°	27 2700K	0 ON/OFF
	30 Trimless			B Black	B Black	38 38°	30 3000K	1 0-10V
					G Gold	55 55°	35 3500K	D DALI
					C Copper		40 4000K	T TRIAC
					S Silver			C CASAMBI

Cabin R

Fixed Recessed

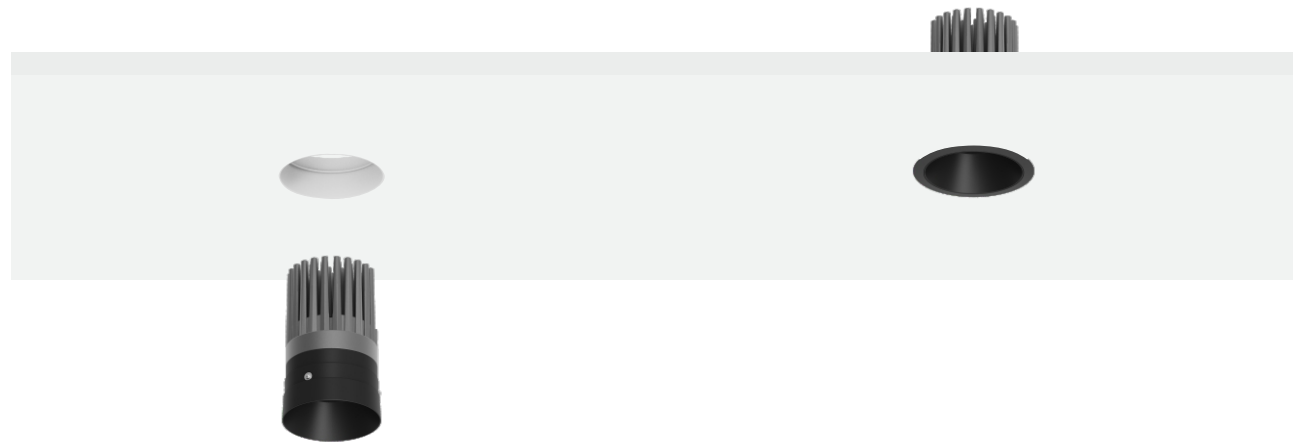

Body

The Cabin R features a fixed circular design with a visually simple, seamless form that ensures excellent visual comfort. The versatile reflector cup version maintains a uniform appearance across all configurations.


Available in decorative and non-decorative versions with diameters of Ø70 mm, Ø120 mm, and Ø150 mm. The main body is constructed from lightweight die-cast aluminum.

Finish

Powder coated finish in matt white (W), matt black (B), matt gold (G), matt copper (C), matt silver (S).

Optional

Trimless



Trimles



Driver

Supplied with non-dimmable remote driver. Driver unit exceeds luminaire aperture; install above ceiling using extension cable. Dimming Options: ON/OFF | 0-10V | DALI | TRIAC | CASAMBI. 220-240V 50/60Hz.

Accessories

N/A

Optic

Reflector.
Beam Angle: 28° / 38° / 55°.


LED Sources

Light source options: High-power LED or COB LED. CRI: 95 or 97 | CCT: 2700K / 3000K / 3500K / 4000K. Additional CRI and CCT options available upon request.

Applications





Its concealed light source for high visual comfort ensures this luminaire blends seamlessly into its architectural environment. With the added flexibility of light aiming. Application areas: Corridors, retail, showrooms, residential, restaurants, hotels.

Cabin R Fixed Recessed



Cabin R
Fixed Round Trim Ø70mm

Cabin R
Fixed Round Trimless Ø120mm

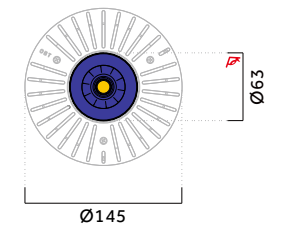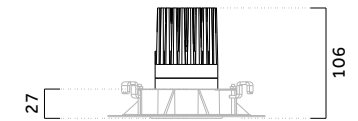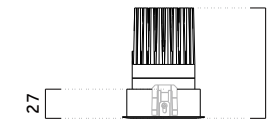


Code ordering example: * * . 7 0 0 5 . * * * * * *

	Product code	LED Power	Delivered Lumen	Finish	Cup	Beam Angle (BA°)	CCT Options	Dimming Options
Cabin R Round Fixed	01 Trim	Max.16W	1760lm	W White	W White	28 28°	27 2700K	0 ON/OFF
	30 Trimless			B Black	B Black	38 38°	30 3000K	1 0-10V
					G Gold	55 55°	35 3500K	D DALI
					C Copper		40 4000K	T TRIAC
					S Silver			C CASAMBI

Cabin R

Fixed Recessed

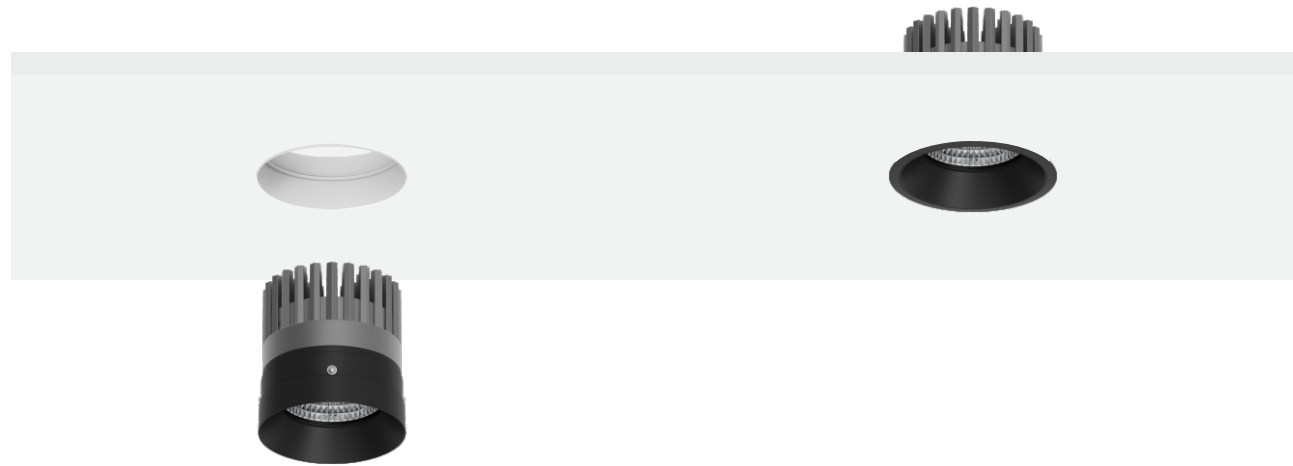

Body

The Cabin R features a fixed circular design with a visually simple, seamless form that ensures excellent visual comfort. The versatile reflector cup version maintains a uniform appearance across all configurations.

Available in decorative and non-decorative versions with diameters of Ø70 mm, Ø120 mm, and Ø150 mm. The main body is constructed from lightweight die-cast aluminum.

Optic

Reflector.
Beam Angle: 28° / 38° / 55°.

LED Sources

Light source options: High-power LED or COB LED.
CRI: 95 or 97 | CCT: 2700K / 3000K / 3500K / 4000K.
Additional CRI and CCT options available upon request.

Finish

Powder coated finish in matt white (W), matt black (B), matt gold (G), matt copper (C), matt silver (S).

Driver

Supplied with non-dimmable remote driver.
Driver unit exceeds luminaire aperture; install above ceiling using extension cable.
Dimming Options: ON/OFF | 0-10V | DALI | TRIAC | CASAMBI.
220-240V 50/60Hz.


Accessories

N/A








Applications

Its concealed light source for high visual comfort ensures this luminaire blends seamlessly into its architectural environment. With the added flexibility of light aiming.
Application areas: Corridors, retail, showrooms, residential, restaurants, hotels.

Optional



Cabin R Fixed Recessed

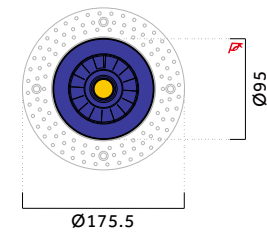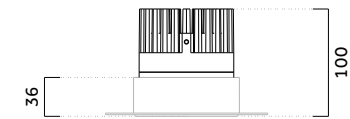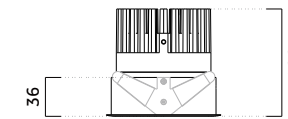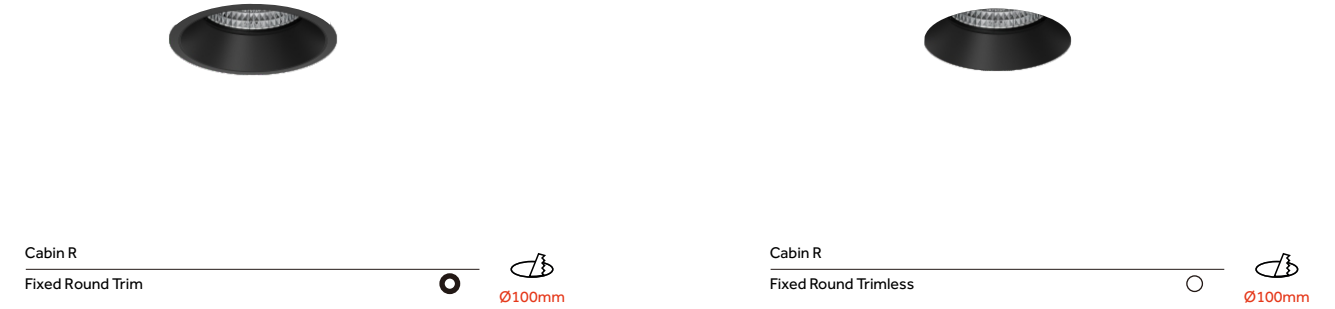


Code ordering example: * * . 1 0 0 0 . * * * * * *

	Product code	LED Power	Delivered Lumen	Finish	Cup	Beam Angle (BA°)	CCT Options	Dimming Options
Cabin R Round Fixed	01 Trim	Max.20W	2200lm	W White	W White	28 28°	27 2700K	0 ON/OFF
	30 Trimless			B Black	B Black	38 38°	30 3000K	1 0-10V
					G Gold	55 55°	35 3500K	D DALI
					C Copper		40 4000K	T TRIAC
					S Silver			C CASAMBI

Cabin R

Fixed Recessed

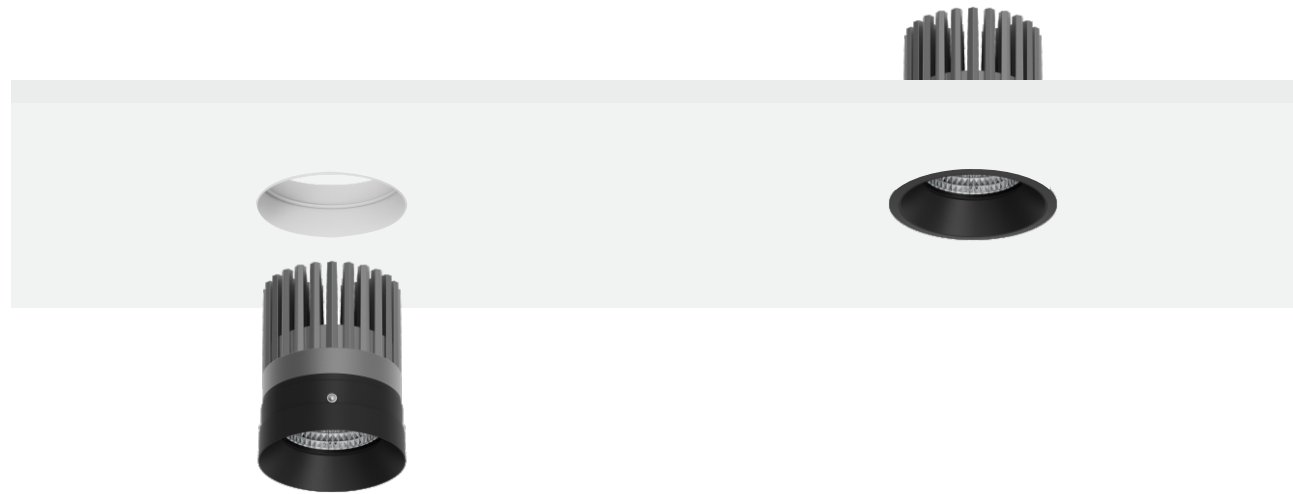

Body

The Cabin R features a fixed circular design with a visually simple, seamless form that ensures excellent visual comfort. The versatile reflector cup version maintains a uniform appearance across all configurations.

Available in decorative and non-decorative versions with diameters of Ø70 mm, Ø120 mm, and Ø150 mm. The main body is constructed from lightweight die-cast aluminum.

Finish

Powder coated finish in matt white (W), matt black (B), matt gold (G), matt copper (C), matt silver (S).

Optional



Trimless



Trimles

Driver

Supplied with non-dimmable remote driver. Driver unit exceeds luminaire aperture; install above ceiling using extension cable. Dimming Options: ON/OFF | 0-10V | DALI | TRIAC | CASAMBI. 220-240V 50/60Hz.

Accessories

N/A

Optic

Reflector.
Beam Angle: 28° / 38° / 55°.


LED Sources

Light source options: High-power LED or COB LED. CRI: 95 or 97 | CCT: 2700K / 3000K / 3500K / 4000K. Additional CRI and CCT options available upon request.

Applications






Its concealed light source for high visual comfort ensures this luminaire blends seamlessly into its architectural environment. With the added flexibility of light aiming. Application areas: Corridors, retail, showrooms, residential, restaurants, hotels.

Cabin R Fixed Recessed



Cabin R
Fixed Round Trim Ø100mm


Cabin R
Fixed Round Trimless Ø100mm

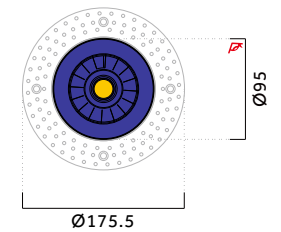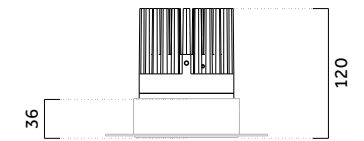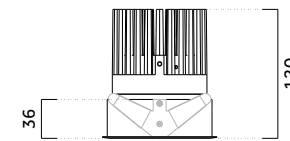

Code ordering example: * * . 1 0 2 0 . * * * * * *


	Product code	LED Power	Delivered Lumen	Finish	Cup	Beam Angle (BA°)	CCT Options	Dimming Options
Cabin R Round Fixed	01 Trim	Max.25W	2750lm	W White	W White	28 28°	27 2700K	0 ON/OFF
	30 Trimless			B Black	B Black	38 38°	30 3000K	1 0-10V
					G Gold	55 55°	35 3500K	D DALI
					C Copper		40 4000K	T TRIAC
					S Silver			C CASAMBI

Installation Schemes

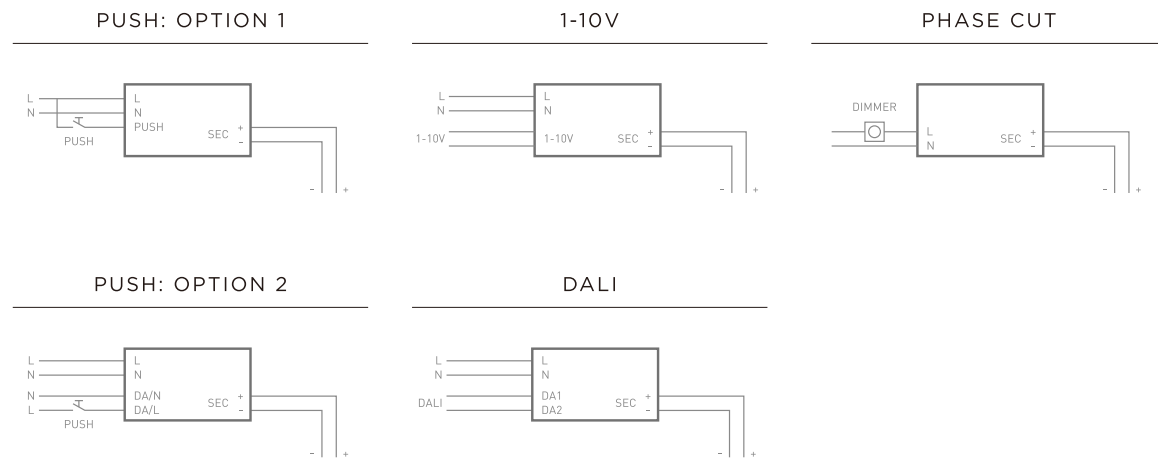


Connection Tips

SEVERAL FIXTURES CONNECTION TO A SINGLE CONSTANT CURRENT DRIVER

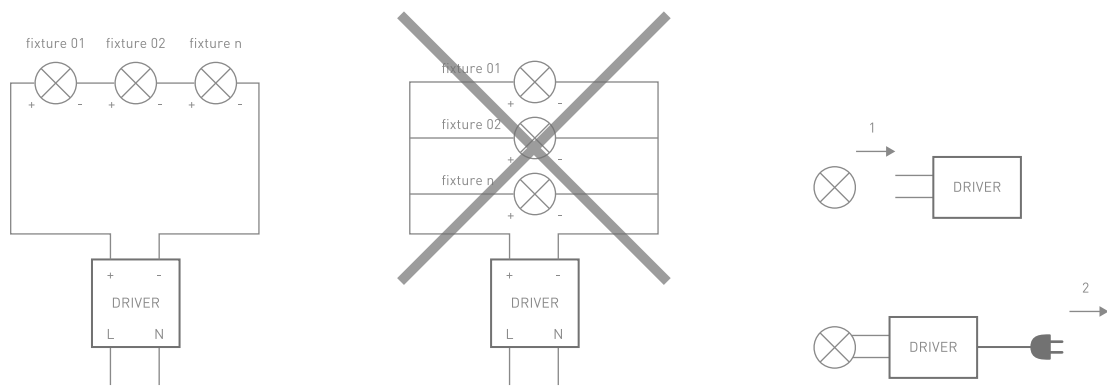

Trimless Mounting

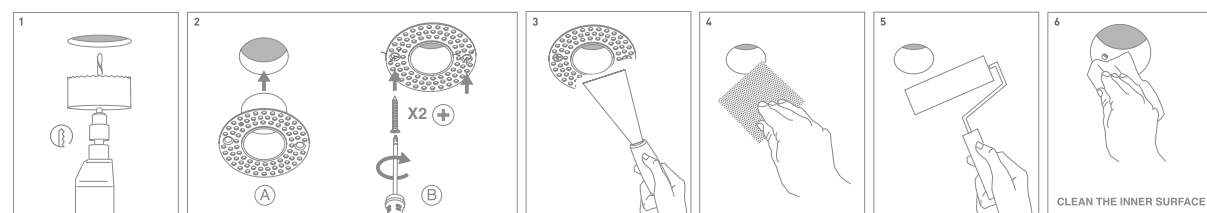

Publication date: December 2025

©Copyright OBT Lighting

Thanks to all contributors for the realization of this catalogue.

Designed by the Graphic Design Department of OBT Lighting.

No part of this catalogue may be reproduced without the written authorization of OBT Lighting.



OBT LIGHTING LIMITED

Unit G1 Capital House 61
Amhurst Road, London,
United Kingdom, E8 1LL
Hotline : 400 090 2289
Email : obt@obt.ltd

www.obt.ltd

Office 5, 8/F, Mega Cube,
8 Wang Kwong Road, Kowloon
Bay, Kowloon, Hong Kong
Hotline : 400 090 2289
Email : obt@obt.ltd

www.obt.ltd



Floor 2, No. 979, Yunhan
Road, Lingang New District,
China (Shanghai) pilot Free
Trade Zone
Hotline : 400 090 2289
Email : obt@obt.ltd

www.obt.ltd

Room 201, building 3, No. 67,
Luoja Nanyue street, Dalong
street, Panyu District,
Guangzhou
Hotline : 400 090 2289
Email : obt@obt.ltd

www.obt.ltd