



Cabin M

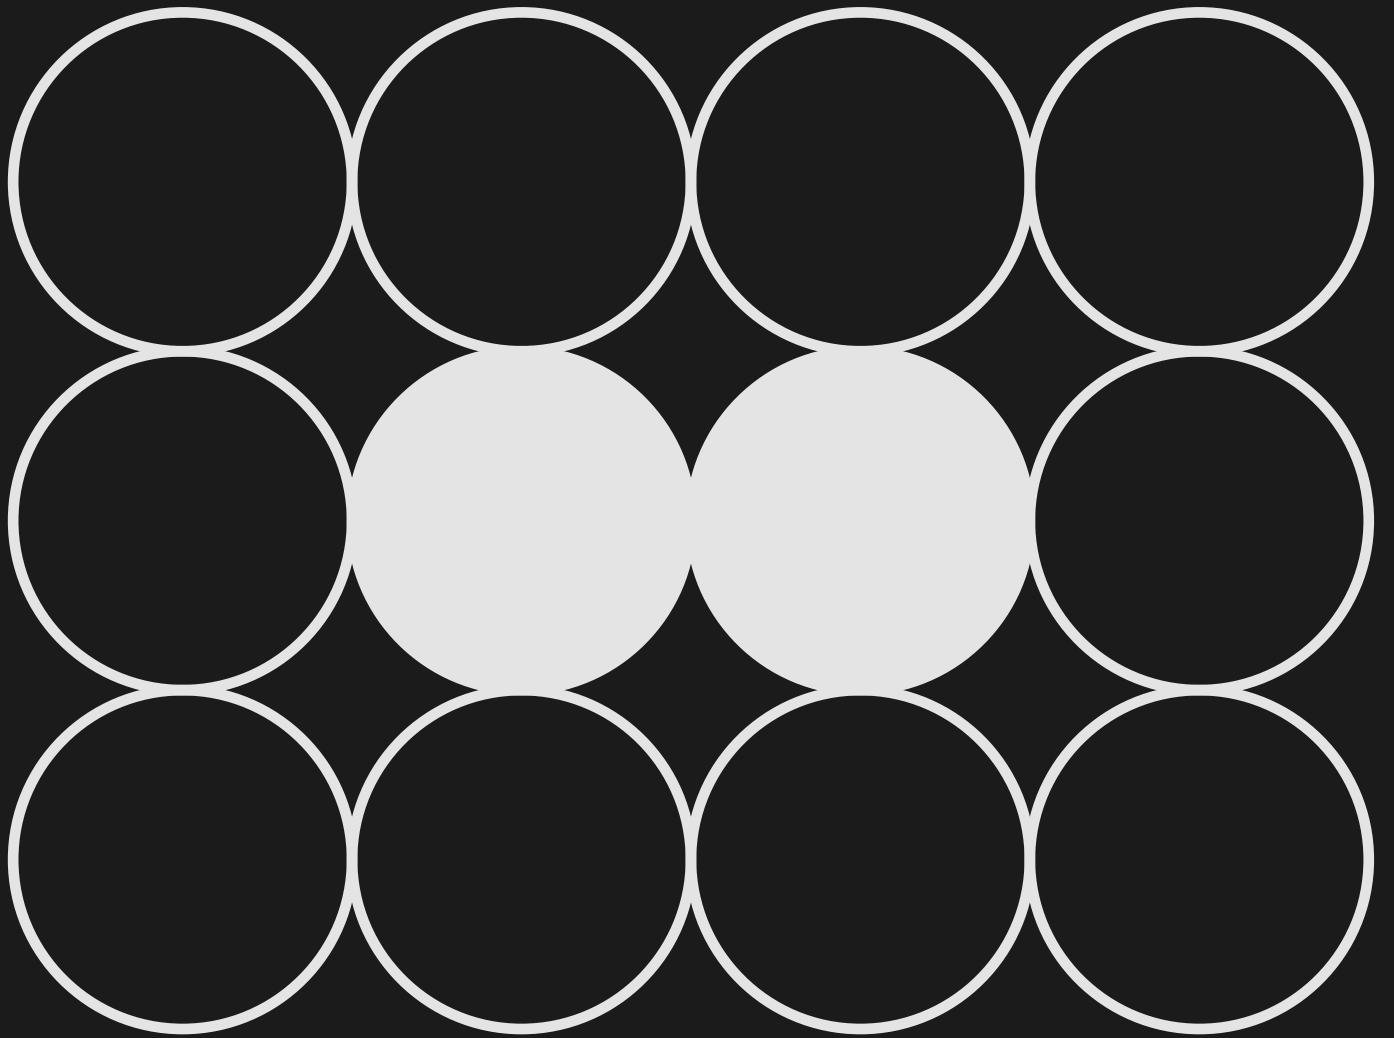


light

It's life's eyes

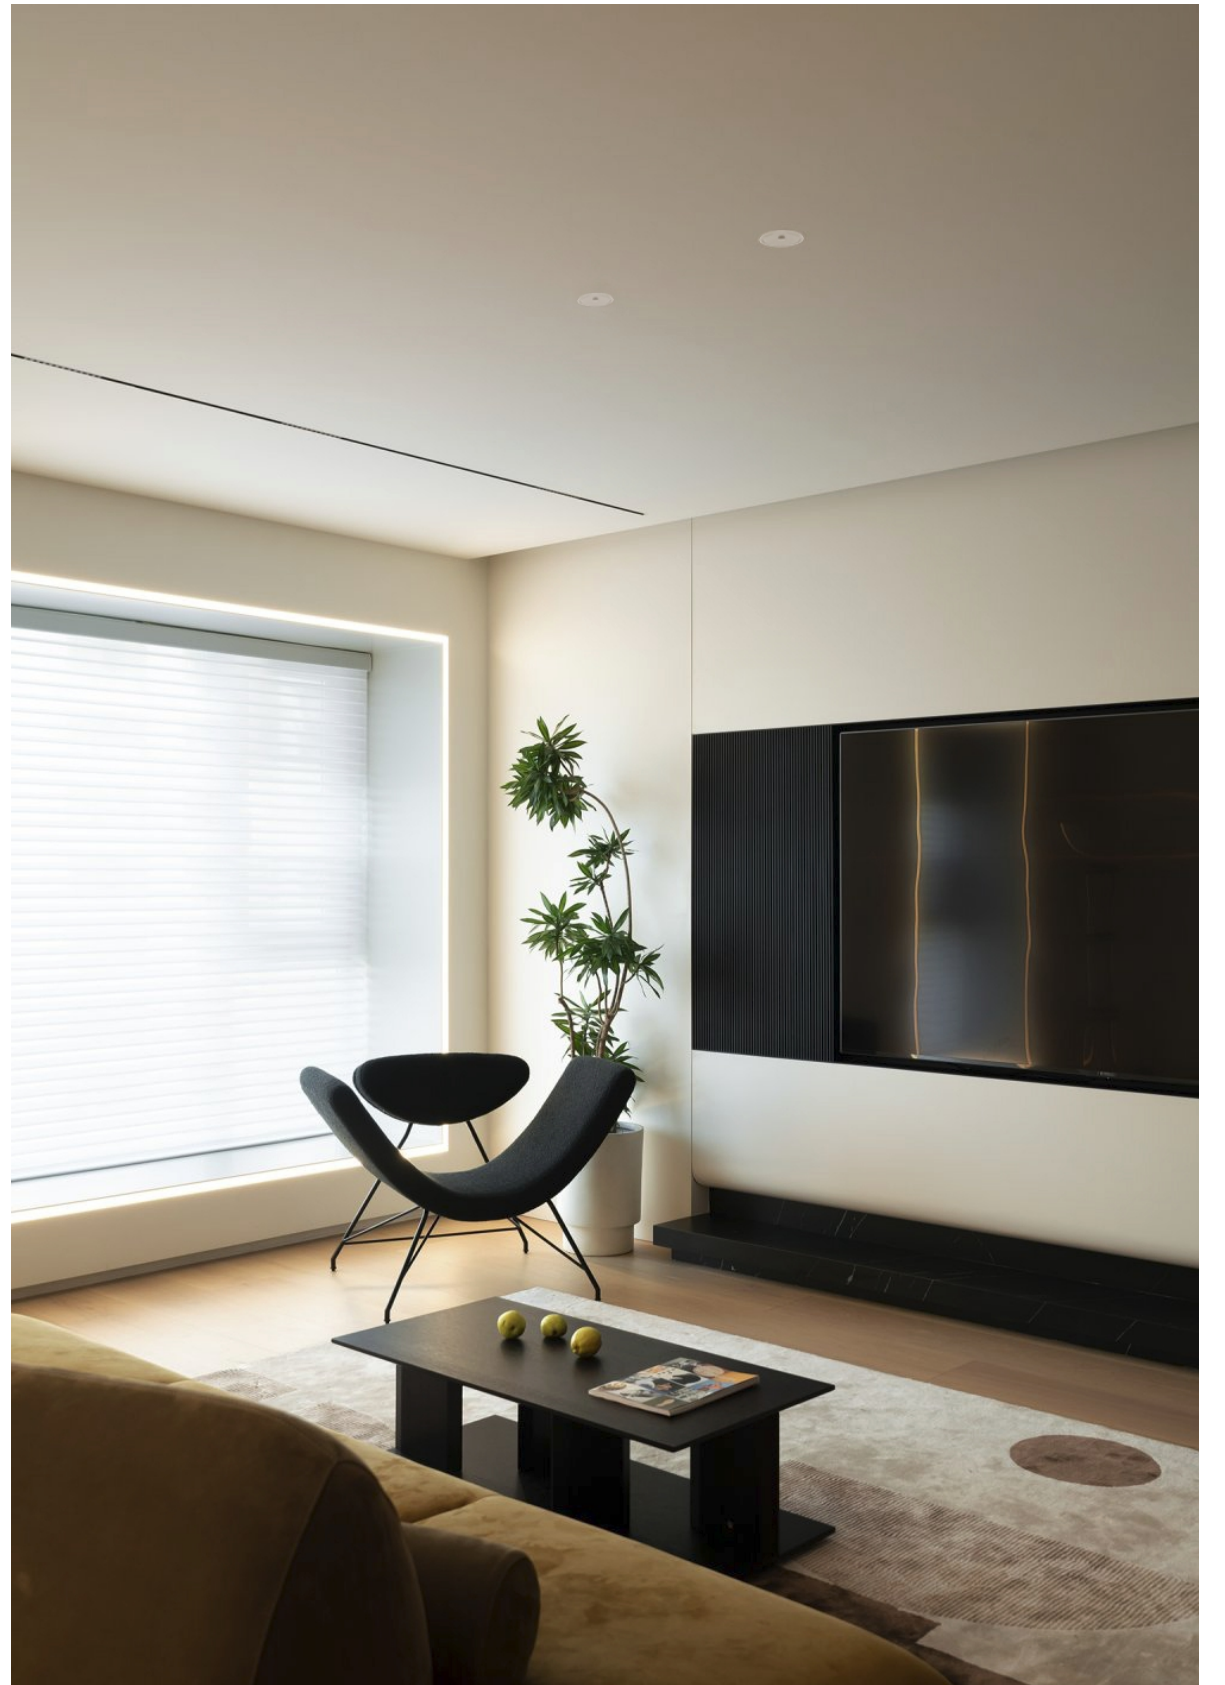

Cabin M

Fixed Recessed

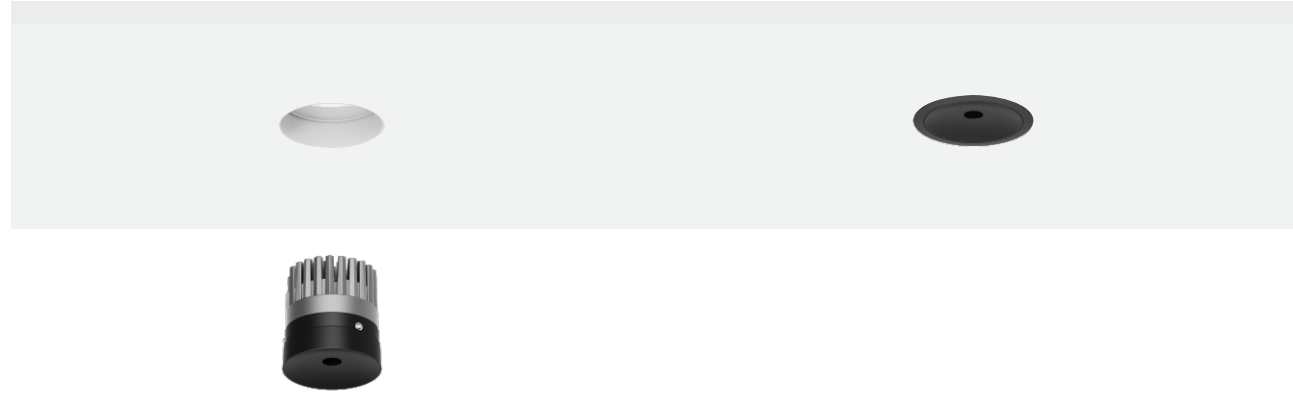

Body

The Cabin M is a recessed downlight featuring an ultra-compact Ø12 mm aperture, suitable for both trim and trimless installations.

It offers easy maintenance and is equipped with high-efficiency LEDs delivering excellent color rendering. This variant ensures broad compatibility with diverse ceiling types and finishes.

The internal trim can be discreetly concealed using matching ceiling materials, creating a seamless and uninterrupted ceiling aesthetic.

Optic

Lens.
Beam Angle: 24° / 36° / 50°.

LED Sources

Light source options: High-power LED or COB LED.
CRI: 95 or 97 | CCT: 2700K / 3000K / 3500K / 4000K.
Additional CRI and CCT options available upon request.

Finish

Powder coated finish in matt white (W), matt black (B).

Driver

Supplied with non-dimmable remote driver.
Driver unit exceeds luminaire aperture; install above ceiling using extension cable.
Dimming Options: ON/OFF | 0-10V | DALI | TRIAC | CASAMBI.
220-240V 50/60Hz.

Accessories

N/A

Applications

Its concealed light source for high visual comfort ensures this luminaire blends seamlessly into its architectural environment. With the added flexibility of light aiming.
Application areas: Corridors, retail, showrooms, residential, restaurants, hotels.

Optional

Trimless




Trimles







Cabin M

Fixed Recessed



Cabin M
Fixed Round Trim Ø70mm


Cabin M
Fixed Round Trimless Ø120mm

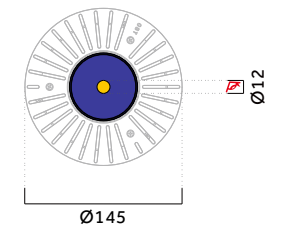

Code ordering example: * * . 7 0 6 6 . * * * * * * *


	Product code	LED Power	Delivered Lumen	Finish	Cup	Beam Angle (BA°)	CCT Options	Dimming Options
Cabin D Round Fixed	01 Trim	Max.12W	720lm	W White	W White	24 24°	27 2700K	0 ON/OFF
	30 Trimless			B Black	B Black	36 36°	30 3000K	1 0-10V
						50 50°	35 3500K	D DALI
							40 4000K	T TRIAC
								C CASAMBI

Installation Schemes

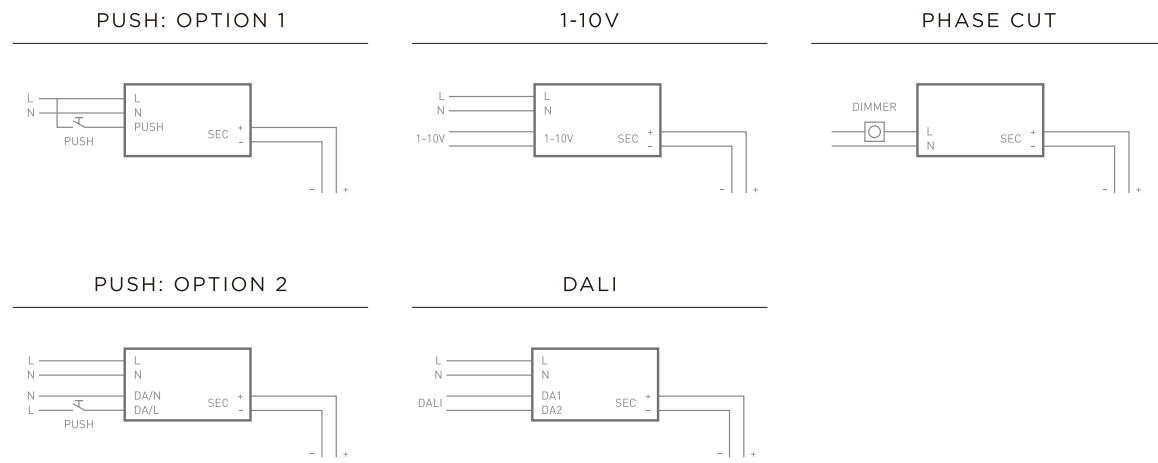


Connection Tips

SEVERAL FIXTURES CONNECTION TO A SINGLE CONSTANT CURRENT DRIVER

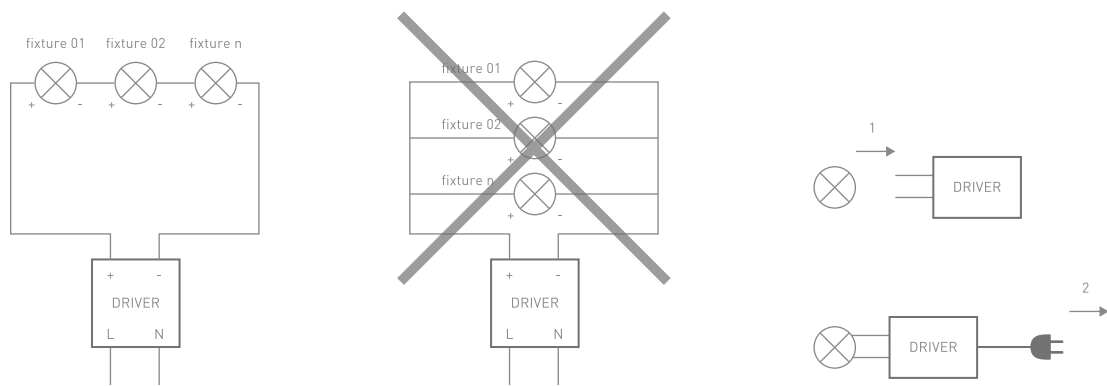

Trimless Mounting

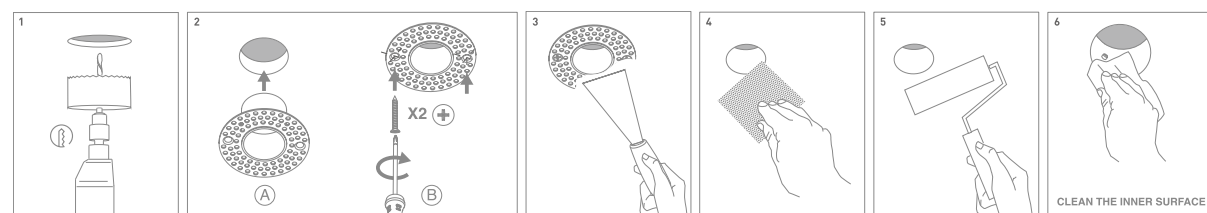

Publication date: December 2025

©Copyright OBT Lighting

Thanks to all contributors for the realization of this catalogue.

Designed by the Graphic Design Department of OBT Lighting.

No part of this catalogue may be reproduced without the written authorization of OBT Lighting.



OBT LIGHTING LIMITED

Unit G1 Capital House 61
Amhurst Road, London,
United Kingdom, E8 1LL
Hotline : 400 090 2289
Email : obt@obt.ltd

www.obt.ltd

Office 5, 8/F, Mega Cube,
8 Wang Kwong Road, Kowloon
Bay, Kowloon, Hong Kong
Hotline : 400 090 2289
Email : obt@obt.ltd

www.obt.ltd



Floor 2, No. 979, Yunhan
Road, Lingang New District,
China (Shanghai) pilot Free
Trade Zone
Hotline : 400 090 2289
Email : obt@obt.ltd

www.obt.ltd

Room 201, building 3, No. 67,
Luoja Nanyue street, Dalong
street, Panyu District,
Guangzhou
Hotline : 400 090 2289
Email : obt@obt.ltd

www.obt.ltd