


# **OT Series Track System**




# 48V Track OT 35 | 45 | 55 | 65

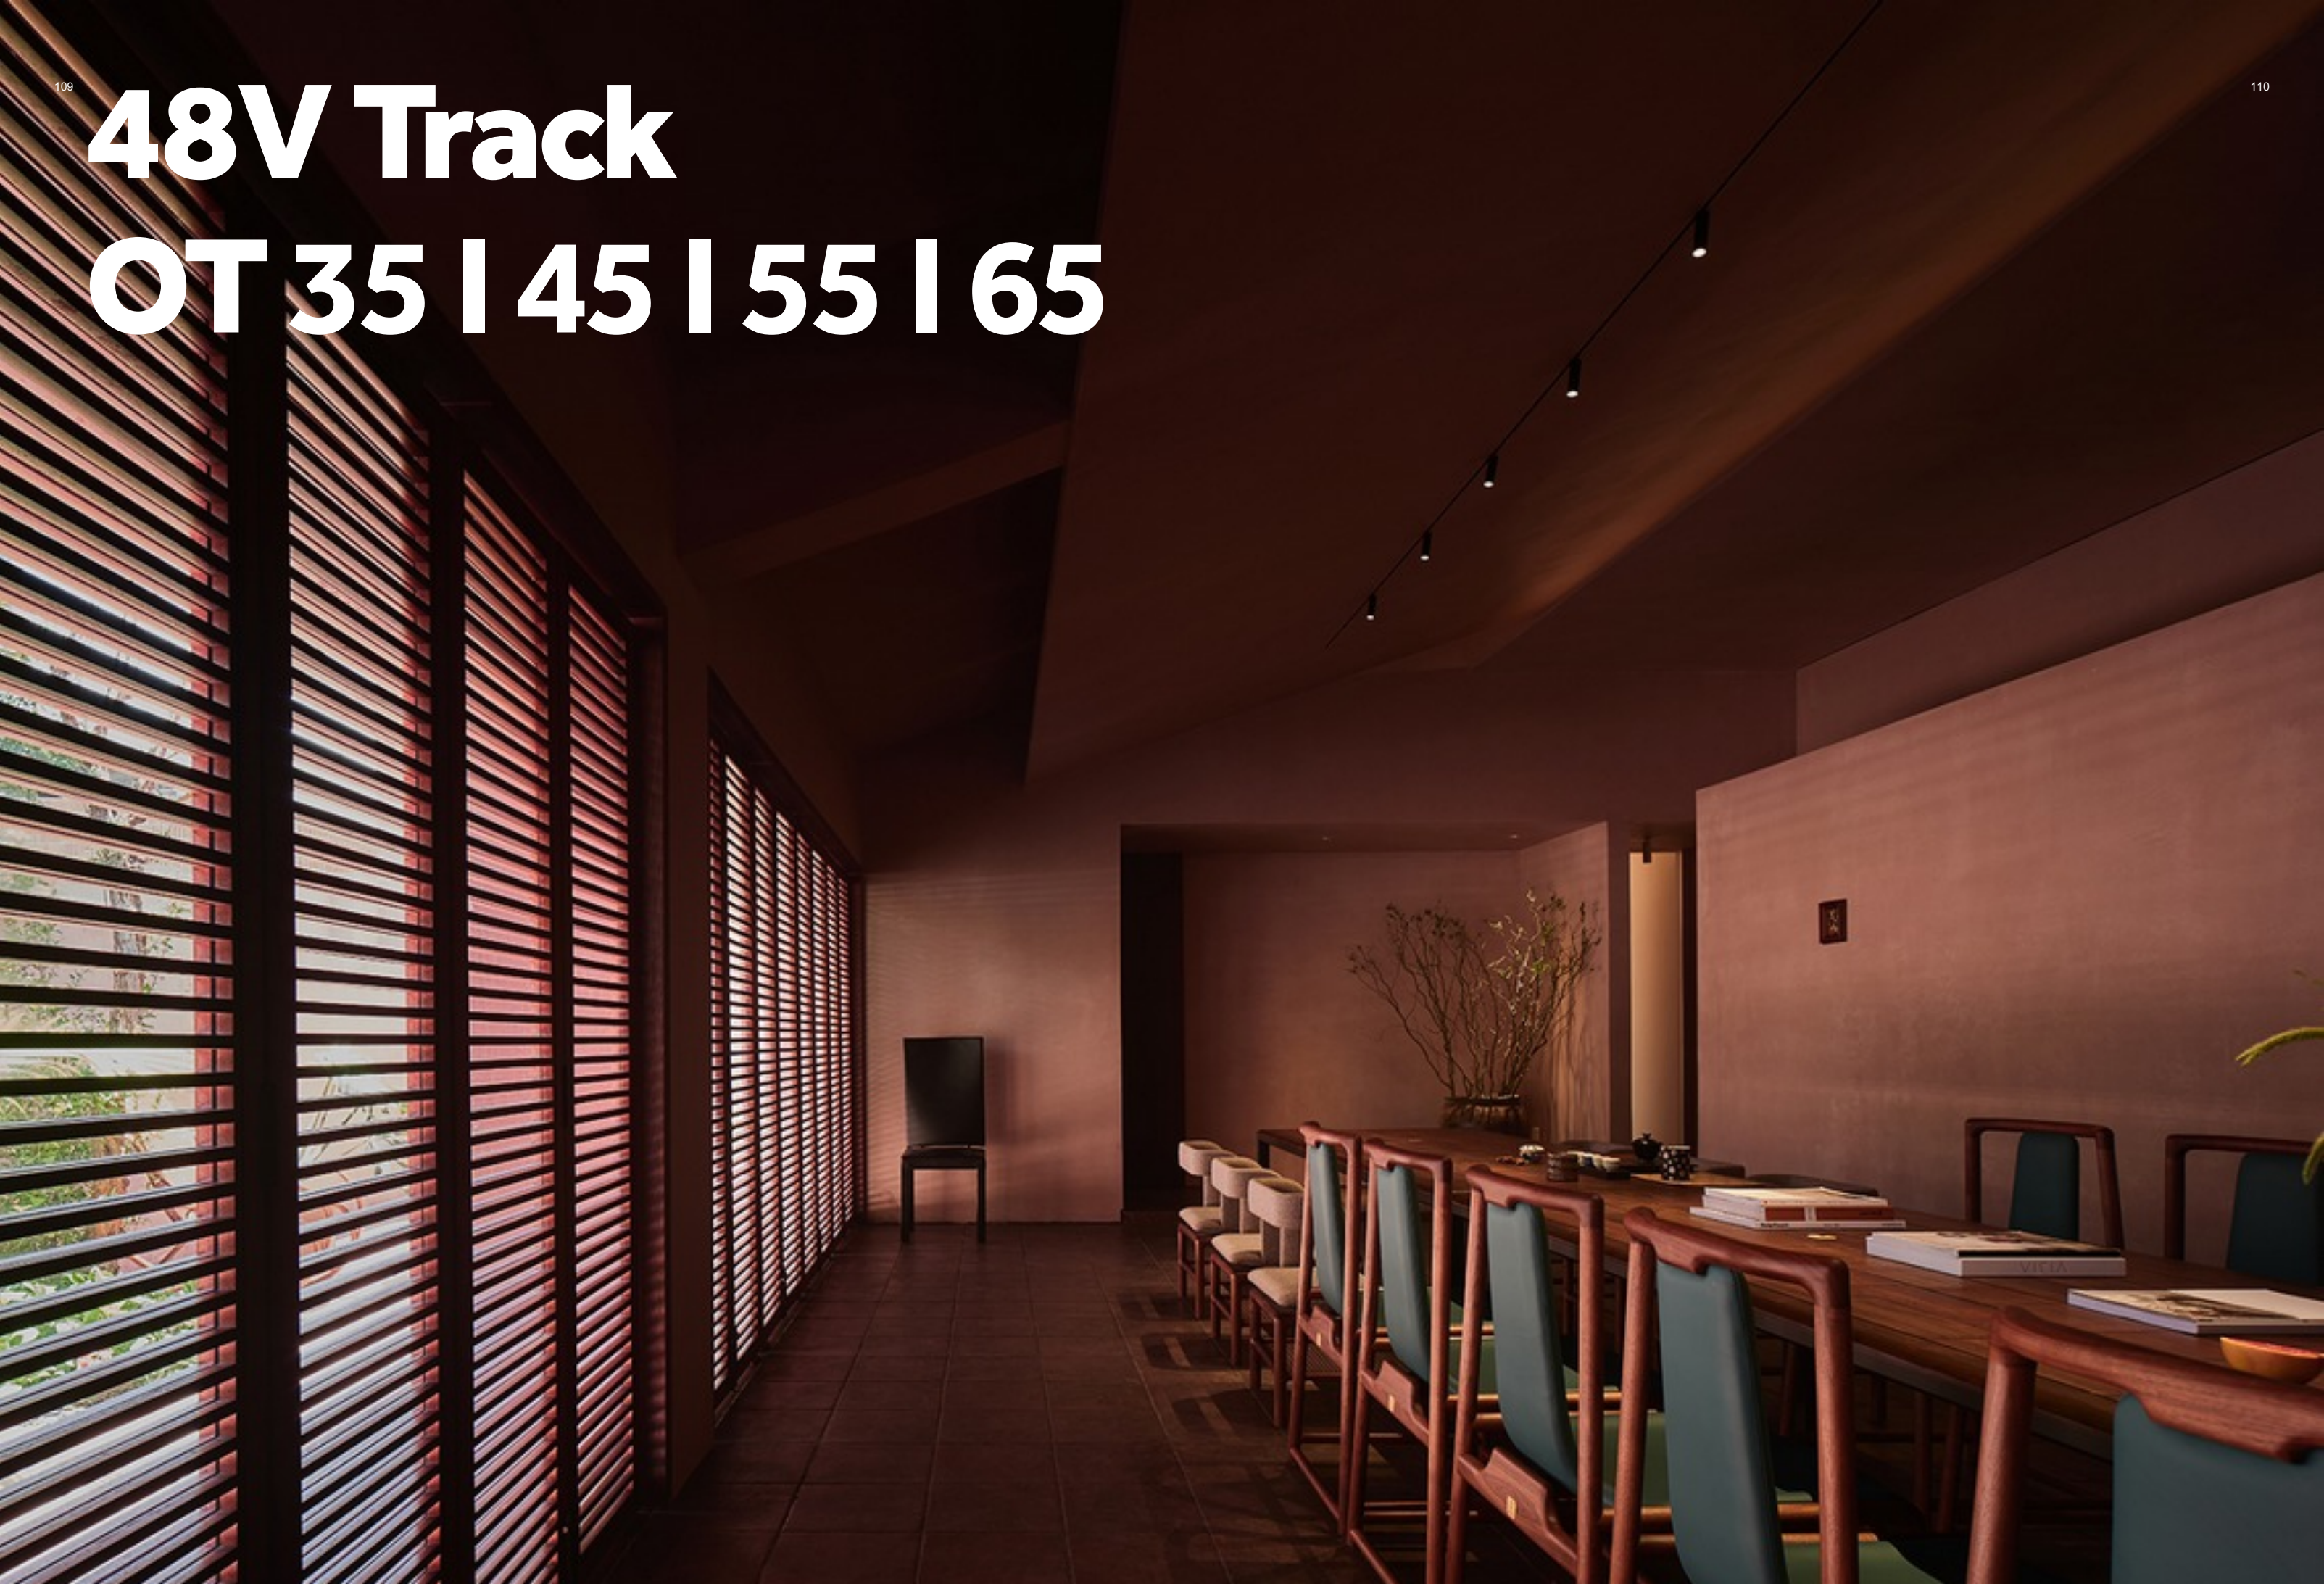

# 2.0 Series Track

48V Surface Mounted Track

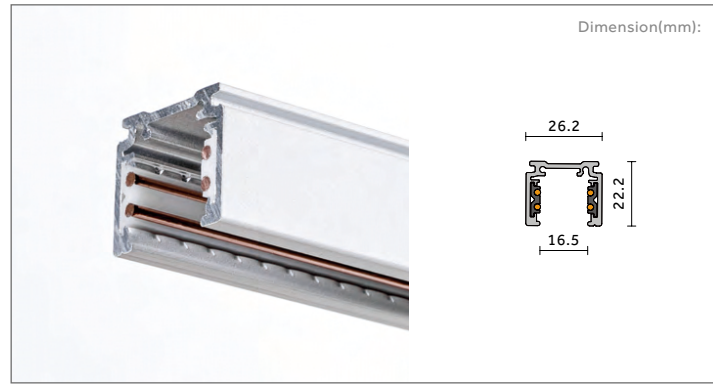

TRACK LENGTH	White	Black
1000mm	37.2610.WH	37.2610.BK
2000mm	37.2620.WH	37.2620.BK
3000mm	37.2630.WH	37.2630.BK

\* A 350W driver is required to power up a single track (maximum length: 10m) with a maximum load of 170W per track.

**37.2662.WH / 37.2662.BK**  
Flat Corner  
90° corner on the same plane.

**37.2664.WH / 37.2664.BK**  
Introvert Corner  
90° corner between different planes, such as walls to ceiling.

**37.2669.SI**  
Connection Plate x 2

**37.2668.WH / 37.2668.BK**  
End Cap x 2


# 2.0 Track & Accessories

Surface / Pendant Mounted

<b>"L" Power Supply Connector</b> <p>37.2660.WH</p>		<b>"R" Power Supply Connector</b> <p>37.2661.WH</p>	
<b>"L" Flat Corner</b> <p>37.2662.WH</p>		<b>"R" Flat Corner</b> <p>37.2663.WH</p>	
<b>Introvert Corner</b> <p>37.2664.WH</p>			
<b>"L" Connector</b> <p>37.2666.WH</p>		<b>"I" Connector</b> <p>37.2665.WH</p>	
<b>Flexible Connector</b> <p>37.2667.WH</p>			
<b>End Cap</b> <p>37.2668.WH</p>		<b>Connection Plate</b> <p>37.2669.SI</p>	
<b>Pendant Accessories</b> <p>37.2670.WH</p>			
<b>Track Cover Plate</b> <p>37.2673.BK</p>		<b>Ceiling Pendant Accessories</b> <p>37.2671.SI</p>	
<b>Ceiling Pendant Accessories</b> <p>37.2672.SI</p>			

# 2.0 Series Deep Profile Track

48V Surface Mounted Deep Profile Track

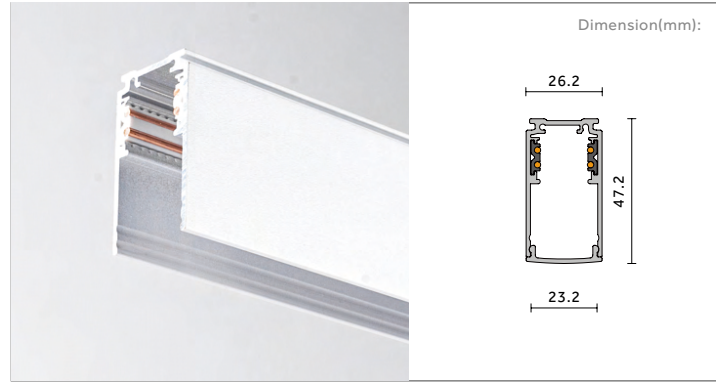

TRACK LENGTH	White	Black
1000mm	37.2310.WH	37.2310.BK
2000mm	37.2320.WH	37.2320.BK
3000mm	37.2330.WH	37.2330.BK

\* A 350W driver is required to power up a single track (maximum length: 10m) with a maximum load of 170W per track.

**37.2361.WH / 37.2362.BK**  
Flat Corner  
90° corner on the same plane.





**37.2363.WH / 37.2363.BK**  
Introvert Corner  
90° corner between different planes, such as walls to ceiling.

**37.2669.SI**  
Connection Plate x 2

**37.2364.WH / 37.2364.BK**  
End Cap x 2


# 2.0 Track & Accessories

Surface / Pendant Mounted

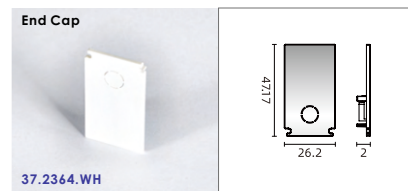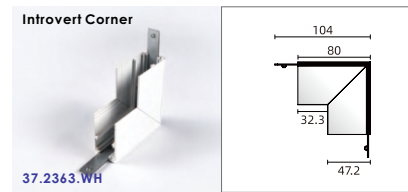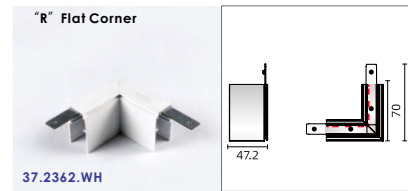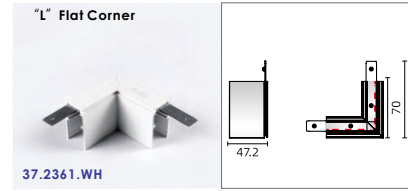

# 2.0 Series Recessed Track

48V Recessed Mounted (Pre-installation Required)

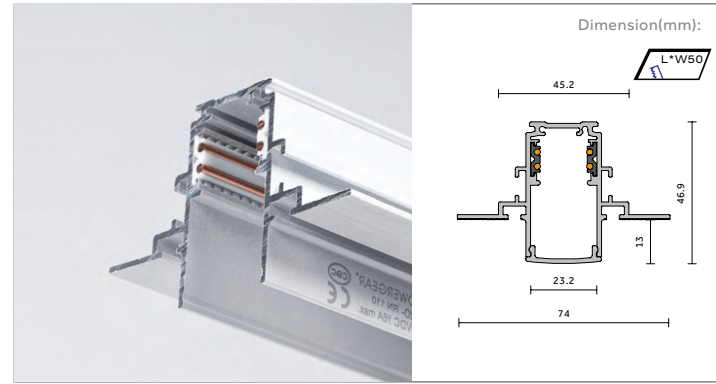

TRACK LENGTH	White	Black
1000mm	37.7410.WH	37.7410.BK
2000mm	37.7420.WH	37.7420.BK
3000mm	37.7430.WH	37.7430.BK

\* A 350W driver is required to power up a single track (maximum length: 10m) with a maximum load of 170W per track.

**37.7461.WH / 37.7462.BK**  
Flat Corner  
90° corner on the same plane.



**37.7463.WH / 37.7463.BK**  
Introvert Corner  
90° corner between different planes, such as walls to ceiling.

**37.7465.SI**  
Connection Plate x 2

**37.7464.WH / 37.7464.BK**  
End Cap x 2


# 2.0 Track & Accessories

Recessed Mounted ( Installation Beforehand )

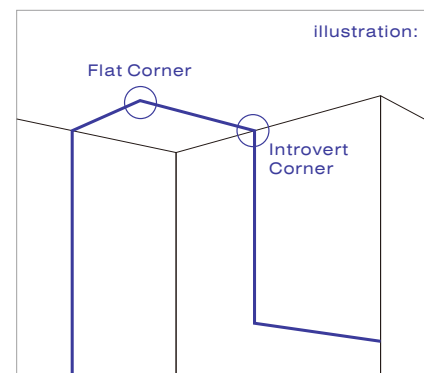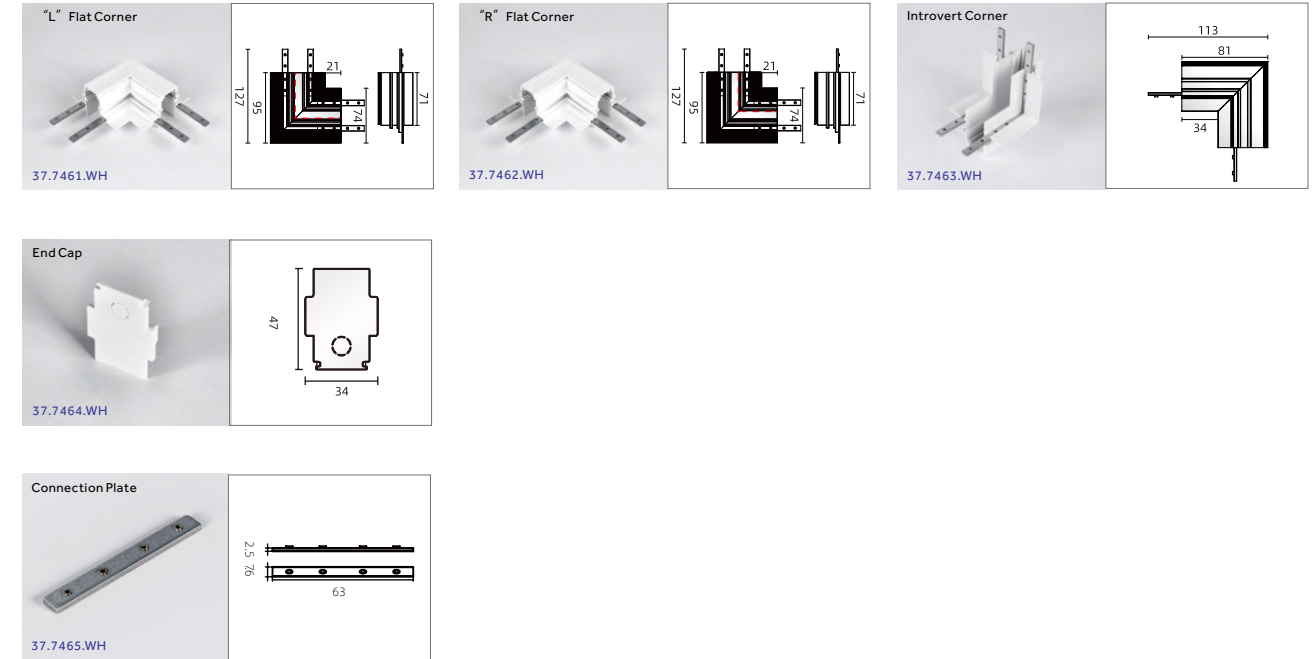

# OT Ø35

48V Low Voltage Track

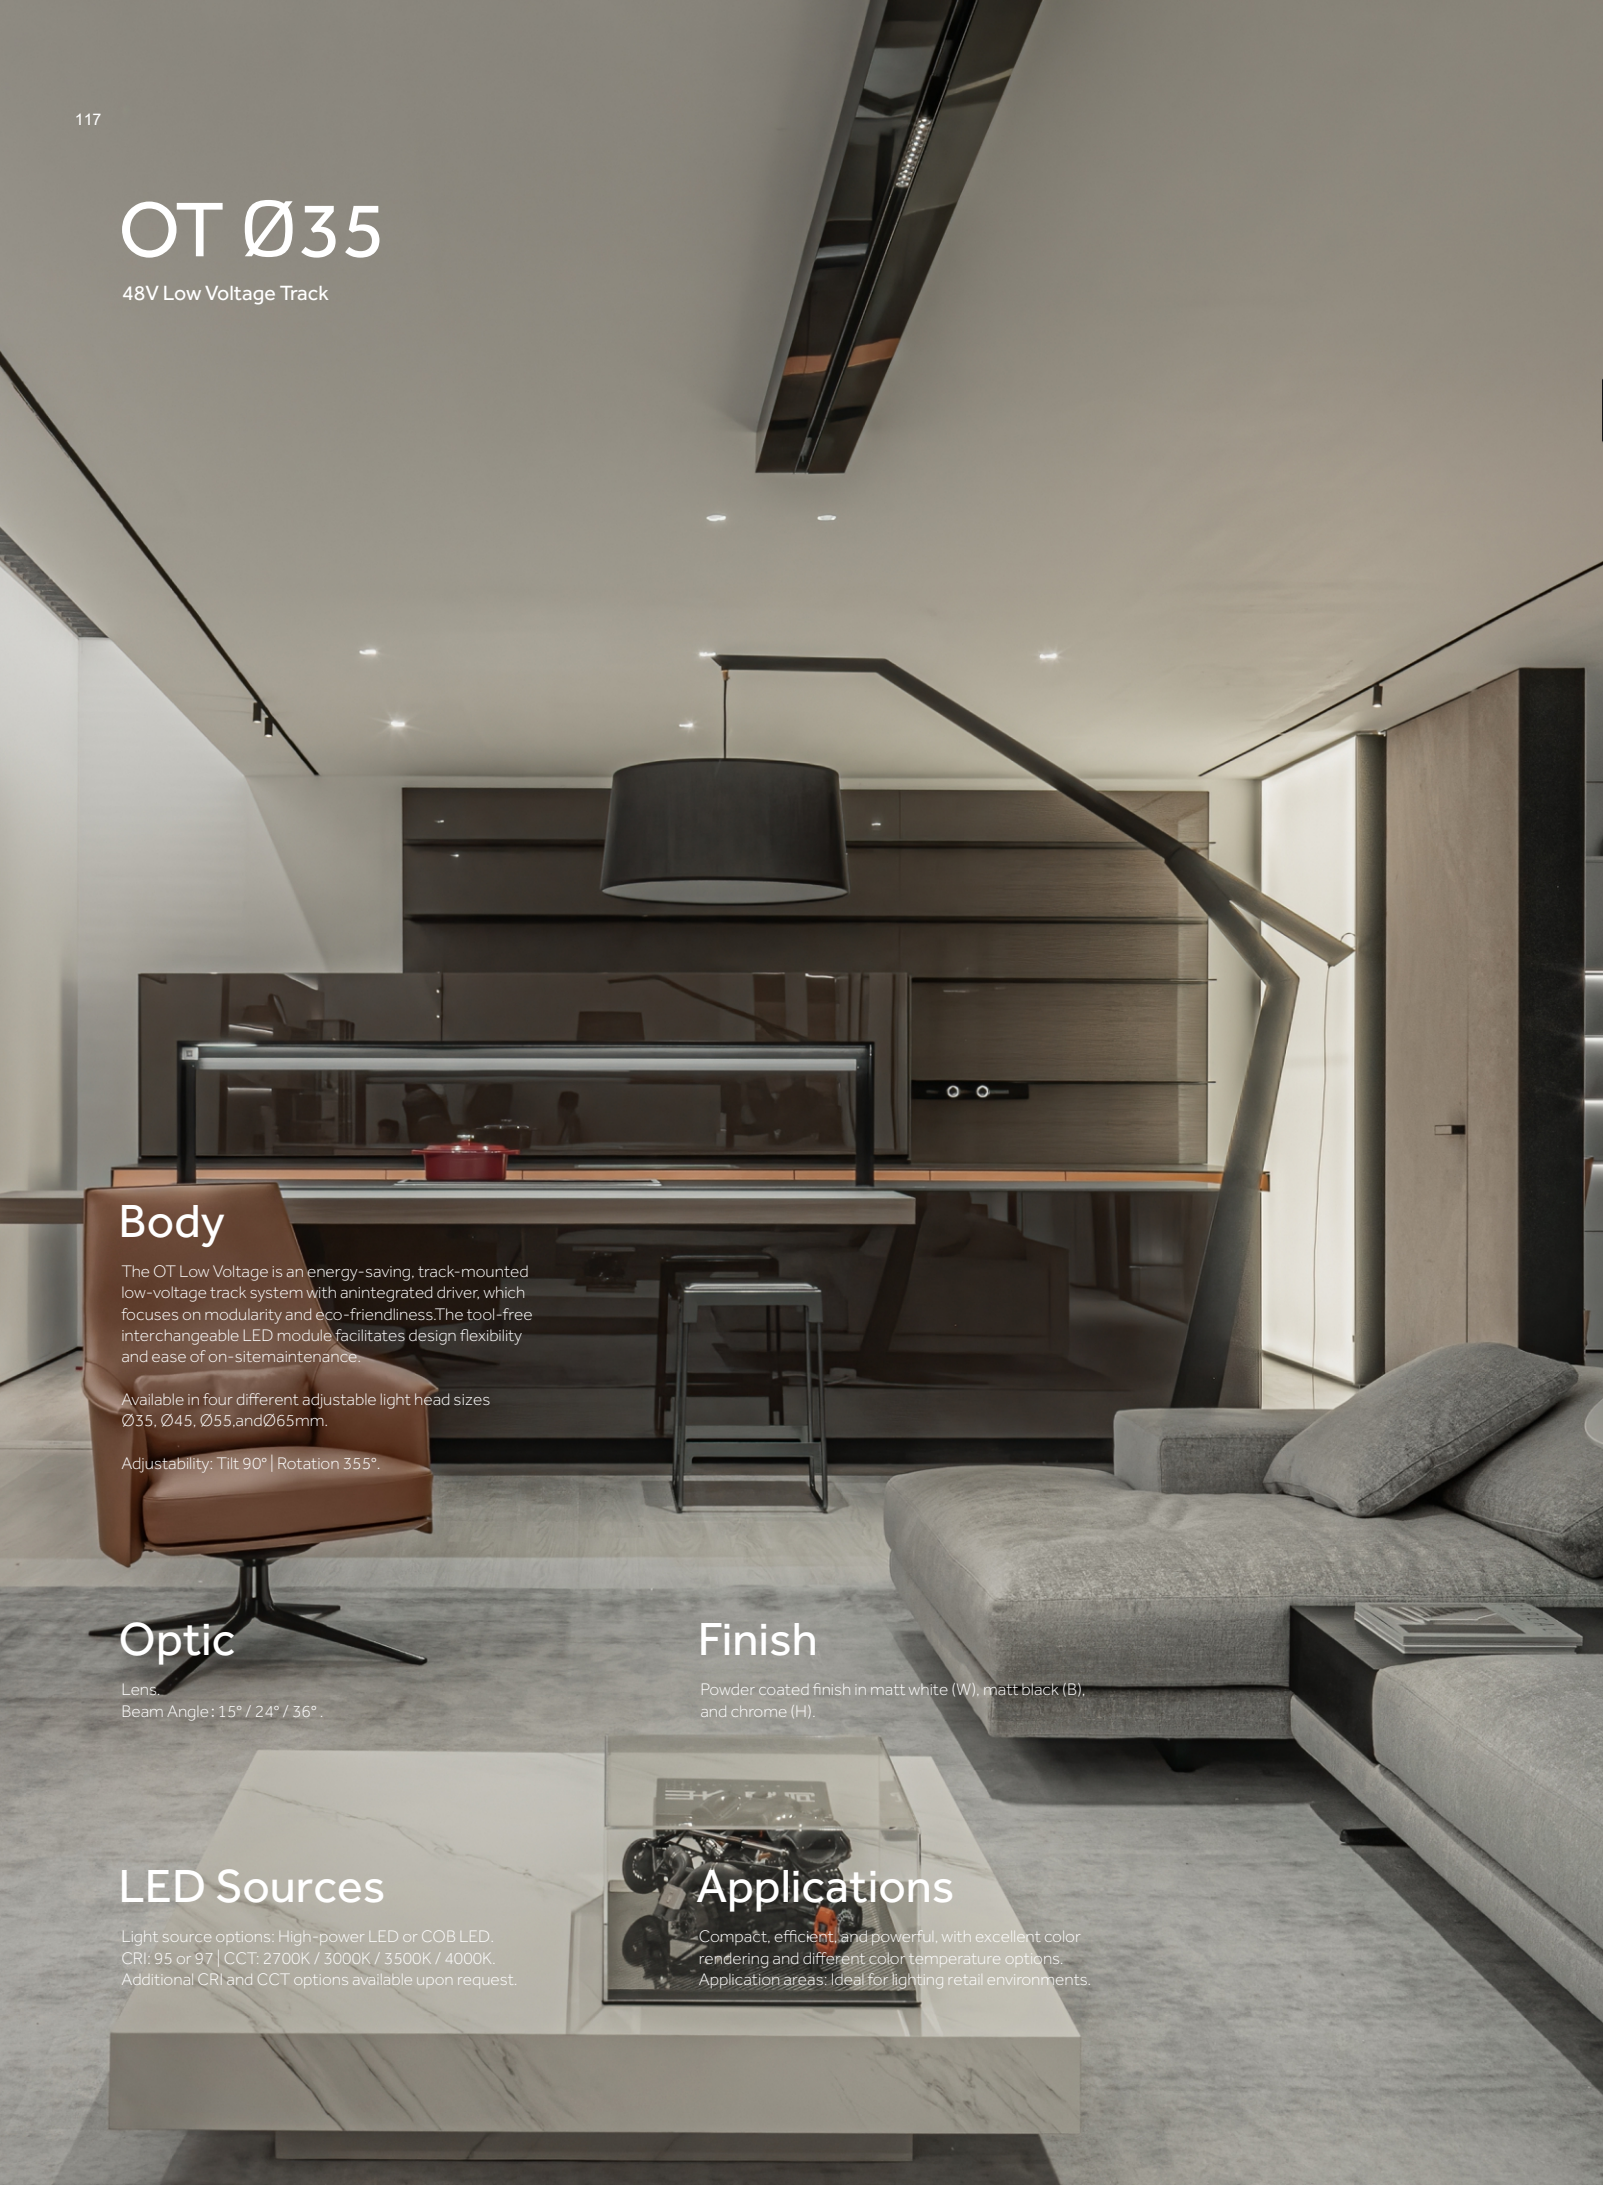

## Body

The OT Low Voltage is an energy-saving, track-mounted low-voltage track system with an integrated driver, which focuses on modularity and eco-friendliness. The tool-free interchangeable LED module facilitates design flexibility and ease of on-site maintenance.

Available in four different adjustable light head sizes Ø35, Ø45, Ø55 and Ø65mm.

Adjustability: Tilt 90° | Rotation 355°.

## Optic

Lens  
Beam Angle: 15° / 24° / 36°.

## Finish

Powder coated finish in matt white (W), matt black (B), and chrome (H).




## LED Sources

Light source options: High-power LED or COB LED.  
CRI: 95 or 97 | CCT: 2700K / 3000K / 3500K / 4000K.  
Additional CRI and CCT options available upon request.

## Applications

Compact, efficient, and powerful, with excellent color rendering and different color temperature options.  
Application areas: Ideal for lighting retail environments.

# OT Ø35 48V Low Voltage Track

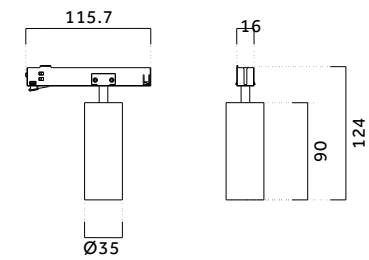

Code ordering example: \* \* . 3 5 0 8 . \* \* \* \* \* \*





	Product code	LED Power	Delivered Lumen	Finish	Cup	Beam Angle (BA°)	CCT Options	Dimming Options
OT 35	<b>32</b> 48V	<b>Max.8W</b>	800lm	<b>W</b> White	<b>W</b> White	<b>15</b> 15°	<b>27</b> 2700K	<b>0</b> ON/OFF
48V Track				<b>B</b> Black	<b>B</b> Black	<b>24</b> 24°	<b>30</b> 3000K	<b>1</b> 0-10V
				<b>H</b> Chrome		<b>36</b> 36°	<b>35</b> 3500K	<b>D</b> DALI
							<b>40</b> 4000K	<b>T</b> TRIAC
								<b>C</b> CASAMBI

# OT Ø45

48V Low Voltage Track



# OT Ø45 48V Low Voltage Track

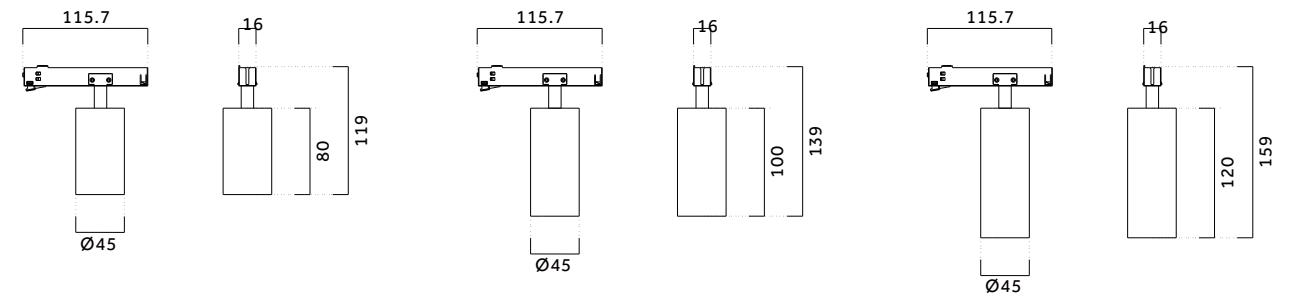

Code ordering example:  $\underline{\quad}$  \* \* .  $\underline{4509}$  . \* \* \* \* \* \* \* \* (Max.9.3W)     $\underline{\quad}$  \* \* .  $\underline{4515}$  . \* \* \* \* \* \* \* \* (Max.15W)  
 $\underline{\quad}$  \* \* .  $\underline{4512}$  . \* \* \* \* \* \* \* \* (Max.12W)






	Product code	LED Power	Delivered Lumen	Finish	Cup	Beam Angle (BA°)	CCT Options	Dimming Options
OT 45	<b>32</b> 48V	<b>Max.9.3W</b>	930lm	<b>W</b> White	<b>W</b> White	<b>15</b> 15°	<b>27</b> 2700K	<b>0</b> ON/OFF
48V Track		<b>Max.12W</b>	1200lm	<b>B</b> Black	<b>B</b> Black	<b>24</b> 24°	<b>30</b> 3000K	<b>1</b> 0-10V
		<b>Max.15W</b>	1500lm	<b>H</b> Chrome		<b>36</b> 36°	<b>35</b> 3500K	<b>D</b> DALI
							<b>40</b> 4000K	<b>T</b> TRIAC <b>C</b> CASAMBI

# OT Ø55

48V Low Voltage Track



# OT Ø55 48V Low Voltage Track

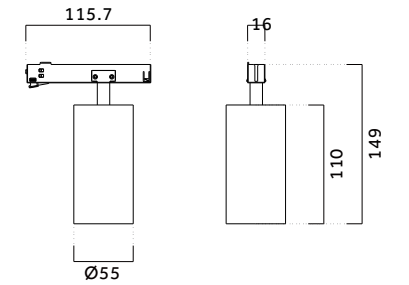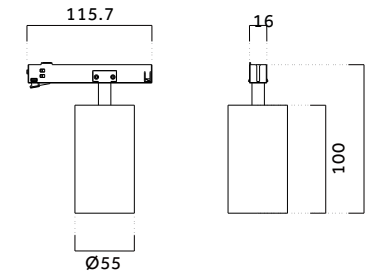

Code ordering example:  $\frac{*}{*} \cdot \frac{5}{5} \frac{1}{1} \frac{5}{5} \cdot \frac{*}{*} \frac{*}{*} \frac{*}{*} \frac{*}{*} \frac{*}{*} \frac{*}{*}$  (Max.15.2W)  $\frac{*}{*} \cdot \frac{5}{5} \frac{1}{1} \frac{8}{8} \cdot \frac{*}{*} \frac{*}{*} \frac{*}{*} \frac{*}{*} \frac{*}{*} \frac{*}{*}$  (Max.18W)

	Product code	LED Power	Delivered Lumen	Finish	Cup	Beam Angle (BA°)	CCT Options	Dimming Options
OT 55	<b>32</b> 48V	<b>Max.15.2W</b>	1520lm	<b>W</b> White	<b>W</b> White	<b>15</b> 15°	<b>27</b> 2700K	<b>0</b> ON/OFF
48V Track		<b>Max.18W</b>	1800lm	<b>B</b> Black	<b>B</b> Black	<b>24</b> 24°	<b>30</b> 3000K	<b>1</b> 0-10V
				<b>H</b> Chrome	<b>N</b> Gun Black	<b>36</b> 36°	<b>35</b> 3500K	<b>D</b> DALI
							<b>40</b> 4000K	<b>T</b> TRIAC
								<b>C</b> CASAMBI




# Track & Accessories

3-Wire Single Circuit Track System

## SURFACE MOUNTED TRACK

Surface mounted universal track with 3 wire conductors.


TRACK LENGTH	White	Black
1000mm	25.3410.WH	25.3410.BK
1500mm	25.3415.WH	25.3415.BK
2000mm	25.3420.WH	25.3420.BK

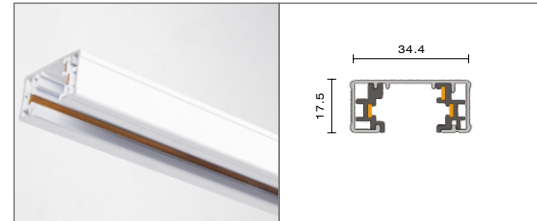

## RECESSED TRACK

Recessed mounted universal track with 3 wire conductors.


TRACK LENGTH	White	Black
1000mm	25.5010.WH	25.5010.BK
1500mm	25.5015.WH	25.5015.BK
2000mm	25.5020.WH	25.5020.BK

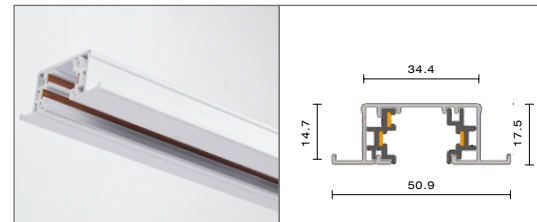

## LIVE END CONNECTOR

Wiring terminal for mains connection.


POLARITY	White	Black
	25.3401.WH	25.3401.BK

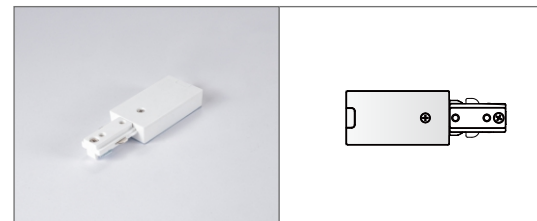

## STRAIGHT CONNECTOR

For interconnecting 2 track sections.

TRACK	White	Black
	25.3403.WH	25.3403.BK

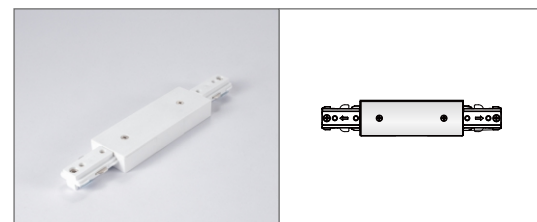

## END CAP

Cover for end of track.

TRACK	White	Black
	25.3413.WH	25.3413.BK




# Track & Accessories

3 Wires Single Circuit Track System

## FLEXIBLE CONNECTOR

For interconnecting 2 track sections flexibly at any angle up to 90°.


TRACK	White	Black
	25.3404.WH	25.3404.BK

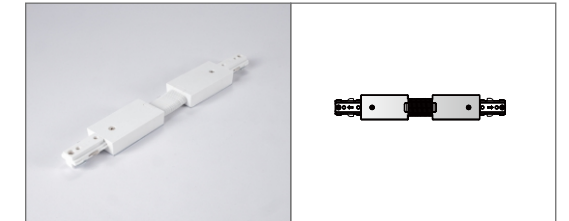

## "L"CONNECTOR

For interconnecting 2 track sections at 90° angle.


POLARITY	White	Black
	25.3405.WH	25.3405.BK

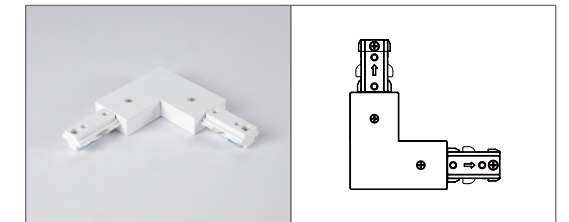

## "X"CONNECTOR

For interconnecting 4 track sections in a X-configuration.


TRACK	White	Black
	25.3412.WH	25.3412.BK

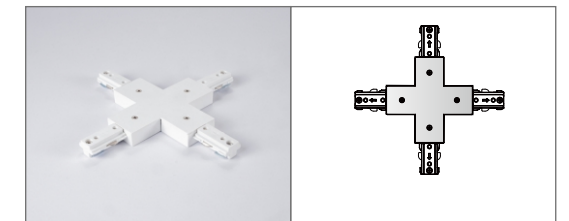

## STRAIGHT CONNECTOR

For interconnecting 2 track sections.


LENGTH	White	Black
	25.3406.WH	25.3406.BK

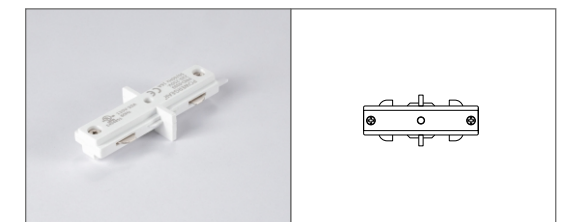

## "T"CONNECTOR

For interconnecting 3 track sections in a T-configuration.

POLARITY	White	Black
	25.3407.WH	25.3407.BK

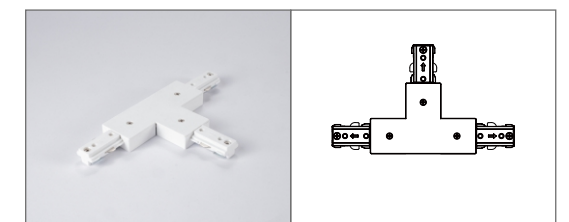


# Track & Accessories

4-Wire 3-Circuit Track System

## SURFACE MOUNTED TRACK

Surface mounted universal track with 4 wire conductors.


TRACK LENGTH	White	Black
1000mm	25.3210.WH	25.3210.BK
1500mm	25.3215.WH	25.3215.BK
2000mm	25.3220.WH	25.3220.BK

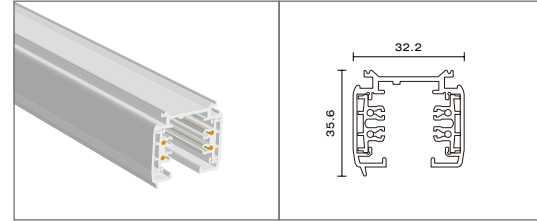

## RECESSED MOUNTED TRACK

Recessed mounted universal track with 4 wire conductors.


TRACK LENGTH	White	Black
1000mm	25.5610.WH	25.5610.BK
1500mm	25.5615.WH	25.5615.BK
2000mm	25.5620.WH	25.5620.BK

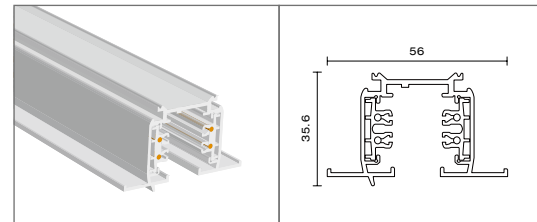

## LIVE END CONNECTOR

Wiring terminal for mains connection.


POLARITY	White	Black
Left	25.3201.WH	25.3201.BK
Right	25.3202.WH	25.3202.BK

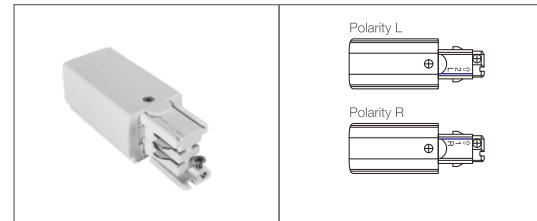

## STRAIGHT CONNECTOR

For interconnecting 2 track sections.


TRACK	White	Black
	25.3203.WH	25.3203.BK

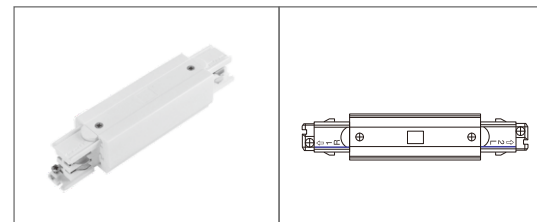

## END CAP

Cover for end of track.

TRACK	White	Black
	25.3213.WH	25.3213.BK

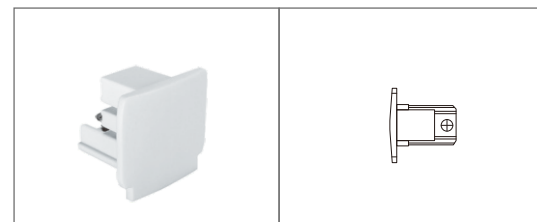


# Track & Accessories

4 Wires 3 Circuits Track System

## FLEXIBLE CONNECTOR

For interconnecting 2 track sections flexibly at any angle up to 90°.


TRACK	White	Black
	25.3204.WH	25.3204.BK

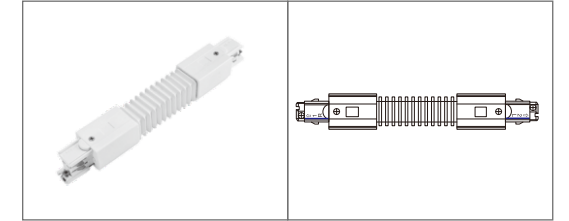

## "L"CONNECTOR

For interconnecting 2 track sections at 90° angle.


POLARITY	White	Black
Left	25.3205.WH	25.3205.BK
Right	25.3206.WH	25.3206.BK

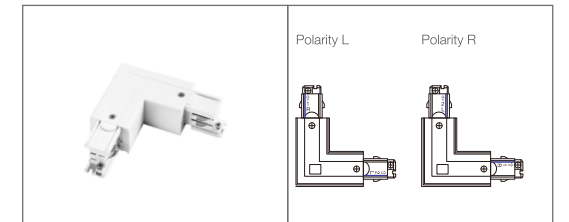

## "X"CONNECTOR

For interconnecting 4 track sections in a X-configuration.


TRACK	White	Black
	25.3212.WH	25.3212.BK

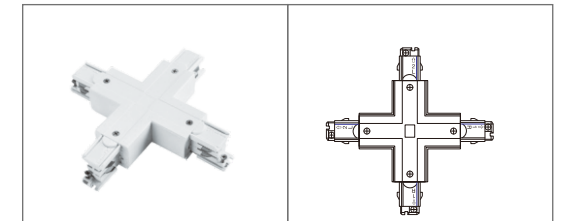

## SUSPENSION KIT

For suspending the track system with steel wire or rod.


LENGTH	White	Black
1.5m Steel Wire	25.3214.WH	25.3214.BK
1.5m Rod M6	25.3218.WH	25.3218.BK

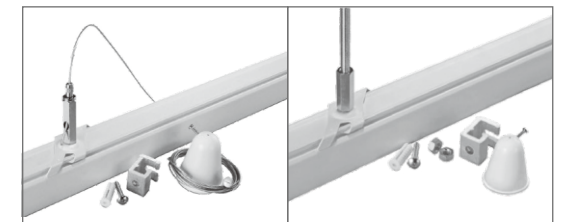

## "T"CONNECTOR

For interconnecting 3 track sections in a T-configuration.

POLARITY	White	Black
Left 1	25.3207.WH	25.3207.BK
Left 2	25.3208.WH	25.3208.BK
Right 1	25.3209.WH	25.3209.BK
Right 2	25.3211.WH	25.3211.BK

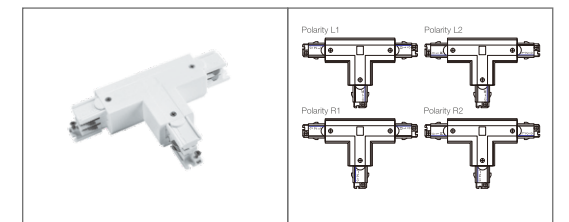






# OT-S Ø55

3/4-Phase Track



# OT-S Ø55 3/4 Phase Track

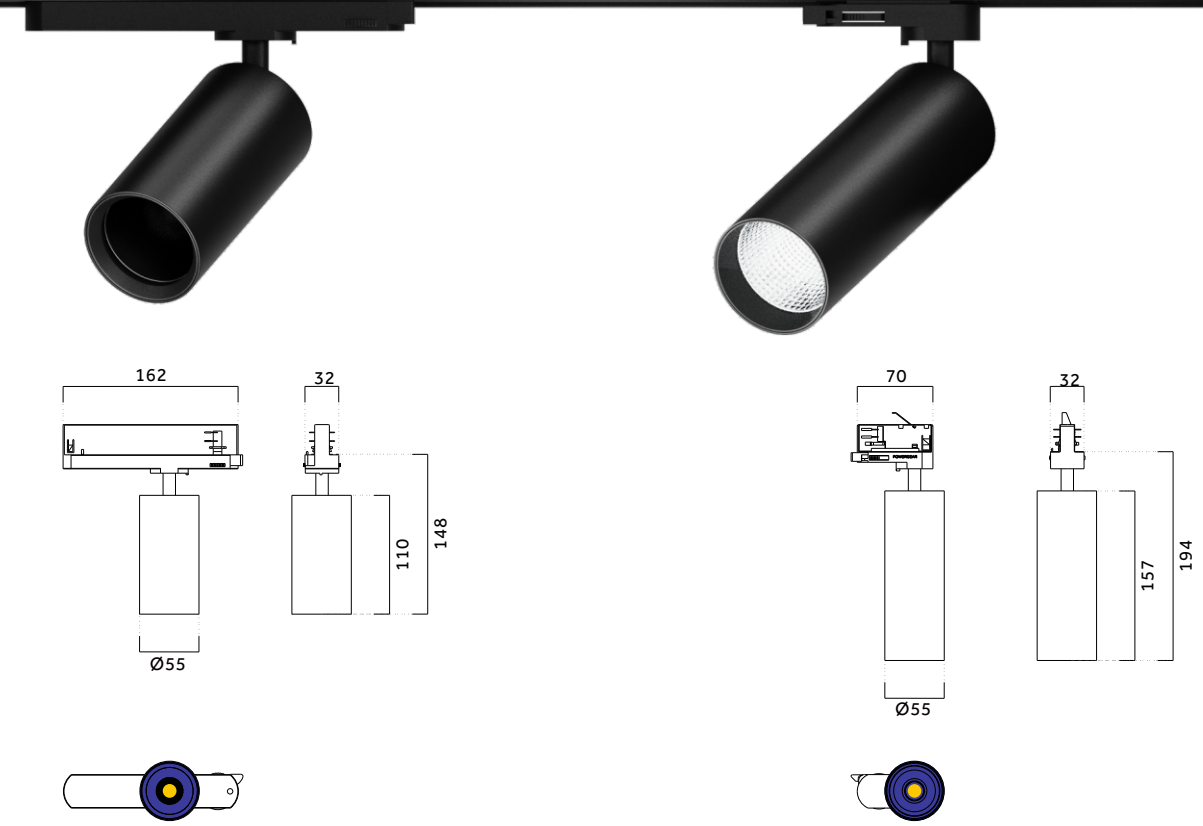

Code ordering example:       .                .                      (Lens)            .                   .                      (Reflector cup)





	Product code	LED Power	Delivered Lumen	Finish	Cup	Beam Angle (BA°)	CCT Options	Dimming Options
3 Phase Track	<b>25</b> 220V	<b>Max.15W</b>	1275lm	<b>W</b> White	<b>W</b> White	<b>15</b> 15°	<b>27</b> 2700K	<b>0</b> ON/OFF
4 Phase Track	<b>26</b> 220V	<b>Max.18W</b>	1800lm	<b>B</b> Black	<b>B</b> Black	<b>24</b> 24°	<b>30</b> 3000K	<b>1</b> 0-10V
				<b>H</b> Chrome	<b>N</b> Gun Black	<b>36</b> 36°	<b>35</b> 3500K	<b>D</b> DALI
							<b>40</b> 4000K	<b>T</b> TRIAC
								<b>C</b> CASAMBI

# OT-S Ø65

3/4-Phase Track



## OT-S Ø65 3/4 Phase Track

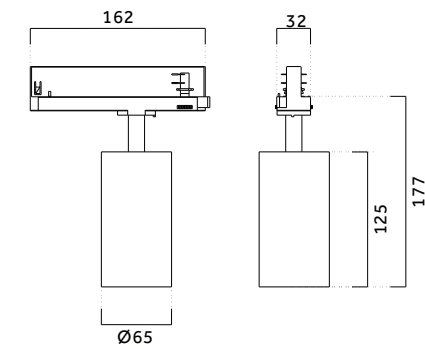

Code ordering example: \* \* . 6 5 2 0 . \* \* \* \* \* \*

	Product code	LED Power	Delivered Lumen	Finish	Cup	Beam Angle (BA°)	CCT Options	Dimming Options
3 Phase Track	<b>25</b> 220V	<b>Max.20W</b>	1700lm	<b>W</b> White	<b>W</b> White	<b>15</b> 15°	<b>27</b> 2700K	<b>0</b> ON/OFF
4 Phase Track	<b>26</b> 220V			<b>B</b> Black	<b>B</b> Black	<b>24</b> 24°	<b>30</b> 3000K	<b>1</b> 0-10V
				<b>H</b> Chrome		<b>36</b> 36°	<b>35</b> 3500K	<b>D</b> DALI
							<b>40</b> 4000K	<b>T</b> TRIAC <b>C</b> CASAMBI

# OT-R Ø35

Adjustable Recessed

## Body

The novel appearance of the back cover and leg, with special structure, fixture can be adjusted more than 200 times.

This series has 2 sizes and 2 wattages, which can well meet the needs of different places.

## Finish

Powder coated finish in matt white (W), matt black (B), and chrome (H)

## Driver

Supplied with non-dimmable remote driver.  
Driver unit exceeds luminaire aperture; install above ceiling using extension cable.  
Dimming Options: ON/OFF | 0-10V | DALI | TRIAC | CASAMBI.  
220-240V 50/60Hz.

## Optic

Lens.  
Beam Angle: 15° / 24° / 36°.

## LED Sources

Light source options: High-power LED or COB LED.  
CRI: 95 or 97 | CCT: 2700K / 3000K / 3500K / 4000K.  
Additional CRI and CCT options available upon request.

## Accessories







N/A

## Applications

Compact, efficient, and powerful, with excellent color rendering and different color temperature options.  
Application areas: ideal for lighting retail environments.

# OT-D Ø35

## Adjustable Recessed

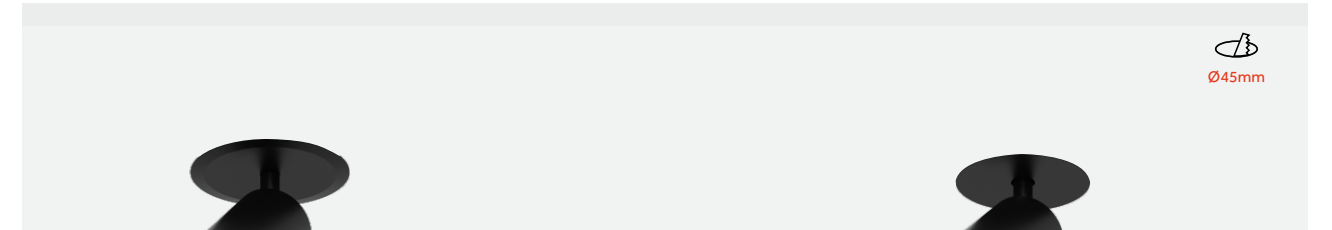

Code ordering example: \* \* . 3 5 0 8 . \* \* \* \* \* \*

	Product code	LED Power	Delivered Lumen	Finish	Cup	Beam Angle (BA°)	CCT Options	Dimming Options
OT-D 35	<b>03</b> Trim	<b>Max.8W</b>	800lm	<b>W</b> White	<b>W</b> White	<b>15</b> 15°	<b>27</b> 2700K	<b>0</b> ON/OFF
Round	<b>12</b> Trimless			<b>B</b> Black	<b>B</b> Black	<b>24</b> 24°	<b>30</b> 3000K	<b>1</b> 0-10V
Adjustable				<b>H</b> Chrome		<b>36</b> 36°	<b>35</b> 3500K	<b>D</b> DALI
							<b>40</b> 4000K	<b>T</b> TRIAC
								<b>C</b> CASAMBI



# OT-R Ø45

Adjustable Recessed





# OT-D Ø45

## Adjustable Recessed

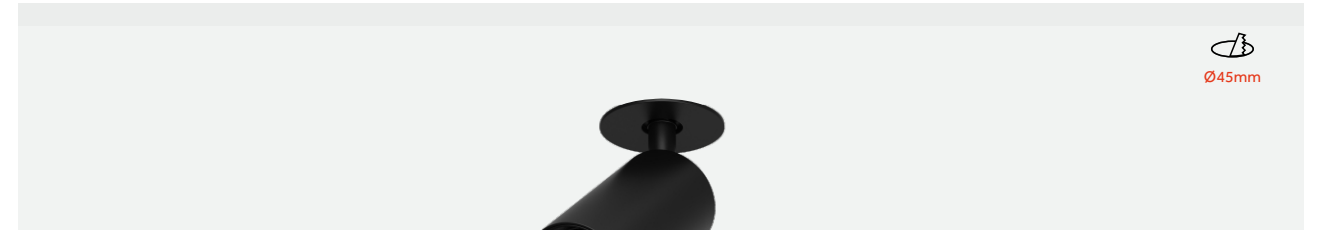

Ø45mm



Code ordering example: \* \* . 4 5 1 8 . \* \* \* \* \* \*

	Product code	LED Power	Delivered Lumen	Finish	Cup	Beam Angle (BA°)	CCT Options	Dimming Options
OT-D 35	<b>03</b> Trim	<b>Max.10W</b>	1000lm	<b>W</b> White	<b>W</b> White	<b>15</b> 15°	<b>27</b> 2700K	<b>0</b> ON/OFF
Round	<b>12</b> Trimless			<b>B</b> Black	<b>B</b> Black	<b>24</b> 24°	<b>30</b> 3000K	<b>1</b> 0-10V
Adjustable				<b>H</b> Chrome		<b>36</b> 36°	<b>35</b> 3500K <b>40</b> 4000K	<b>D</b> DALI <b>T</b> TRIAC <b>C</b> CASAMBI

# OT-W Ø35

Adjustable Wall Mounted

## Body

Long and thin, blends in well with the space. Small diameter, high wattage.

A range of luminaires designed primarily for spaces with restricted heights and no suspended ceilings. Can be horizontally at 90 degrees and rotated at 350 degrees.

## Optic

Lens.  
Beam Angle: 15° / 24° / 36°

## LED Sources

Light source options: High-power LED or COB LED.  
CRI: 93 or 97 | CCT: 2700K / 3000K / 3500K / 4000K.  
Additional CRI and CCT options available upon request.

## Finish

Powder coated finish in matt white (W), matt black (B), chrome (H) and copper (C).

## Driver

Supplied with non-dimmable remote driver.  
Dimming Options: ON/OFF | 0-10V | DALI | TRIAC | CASAMBI.  
220-240V 50/60Hz.

## Accessories







N/A

## Applications

Compact, efficient, and powerful, with excellent color rendering and different color temperature options.  
Application areas: Ideal for lighting retail environments.

# OT-W Ø35

## Adjustable Wall Mounted

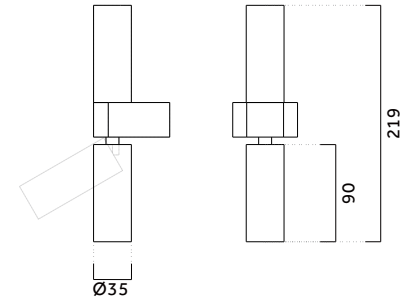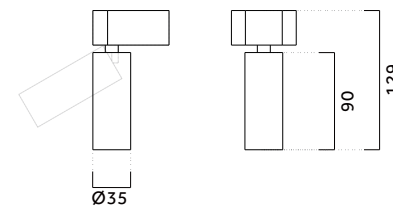

Code ordering example: **\*\* . 3 5 9 0 . \* \* \* \* \* \*** (Max.6W) **\*\* . 3 5 9 1 . \* \* \* \* \* \*** (Max.12W)

	Product code	LED Power	Delivered Lumen	Finish	Cup	Beam Angle (BA°)	CCT Options	Dimming Options
OT-W 35	<b>52</b> 220V	<b>Max.6W</b>	600lm	<b>W</b> White	<b>W</b> White	<b>15</b> 15°	<b>27</b> 2700K	<b>0</b> ON/OFF
Adjustable		<b>Max.2*6W</b>	1200lm	<b>B</b> Black	<b>B</b> Black	<b>24</b> 24°	<b>30</b> 3000K	<b>1</b> 0-10V
Wall Mounted				<b>H</b> Chrome		<b>36</b> 36°	<b>35</b> 3500K	<b>D</b> DALI
				<b>C</b> Copper			<b>40</b> 4000K	<b>T</b> TRIAC
								<b>C</b> CASAMBI

# OT-M Ø35

Adjustable Ceiling Surface



## Body

Surface mounted light, CNC machining, luminaire surface can support electroplating treatment. With anti-glare and high efficiency optics.

Classic and durable, suitable for spaces with restricted ceiling heights.

## Finish

Powder coated finish in matt white (W), matt black (B), chrome (H) and copper (C).

## Driver

Supplied with non-dimmable remote driver.  
Dimming Options: ON/OFF | 0-10V | DALI | TRIAC | CASAMBI.  
220-240V 50/60Hz.

## Optic

Lens.  
Beam Angle: 15° / 24° / 36°.

## LED Sources






Light source options: High-power LED or COB LED.  
CRI: 95 or 97 | CCT: 2700K / 3000K / 3500K / 4000K.  
Additional CRI and CCT options available upon request.

## Applications

Compact, efficient, and powerful, with excellent color rendering and different color temperature options.  
Application areas: Ideal for lighting retail environments.

# OT-M Ø35

## Adjustable Ceiling Surface

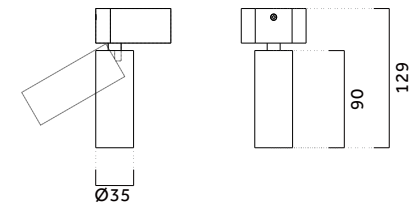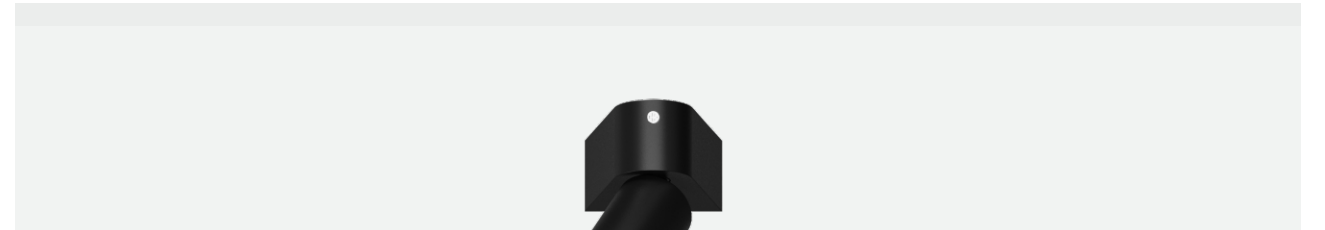

Code ordering example: \* \* . 3 5 2 9 . \* \* \* \* \* \*

	Product code	LED Power	Delivered Lumen	Finish	Cup	Beam Angle (BA°)	CCT Options	Dimming Options
OT-M 35	<b>52</b> 220V	<b>Max.6W</b>	600lm	<b>W</b> White	<b>W</b> White	<b>15</b> 15°	<b>27</b> 2700K	<b>0</b> ON/OFF
Surface				<b>B</b> Black	<b>B</b> Black	<b>24</b> 24°	<b>30</b> 3000K	<b>1</b> 0-10V
Adjustable				<b>H</b> Chrome		<b>36</b> 36°	<b>35</b> 3500K	<b>D</b> DALI
				<b>C</b> Copper			<b>40</b> 4000K	<b>T</b> TRIAC
								<b>C</b> CASAMBI








# OT-Q

3/4-Phase Track



## OT-M Ø35 | Ø60 | Ø80 3/4 Phase Track

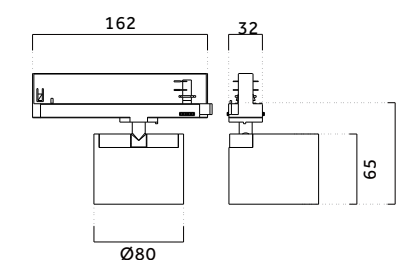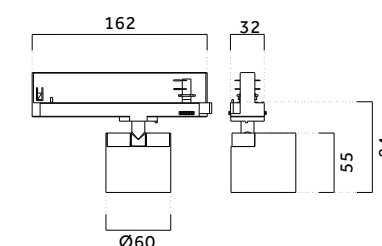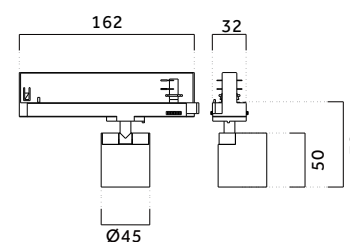

Code ordering example:  $\underline{\quad}$  \* \* .  $\underline{4550}$  . \* \* \* \* \* \* \* \* \* \* (Max.5W)     $\underline{\quad}$  \* \* .  $\underline{6055}$  . \* \* \* \* \* \* \* \* \* \* (Max.8.5W)  
 $\underline{\quad}$  \* \* .  $\underline{8060}$  . \* \* \* \* \* \* \* \* \* \* (Max.13W)

	Product code	LED Power	Delivered Lumen	Finish	Cup	Beam Angle (BA°)	CCT Options	Dimming Options
3 Phase Track	<b>25</b> 220V	<b>Max.5W</b>	500lm	<b>W</b> White	<b>W</b> White	<b>15</b> 15°	<b>27</b> 2700K	<b>0</b> ON/OFF
4 Phase Track	<b>26</b> 220V	<b>Max.8.5W</b>	850lm	<b>B</b> Black	<b>B</b> Black	<b>24</b> 24°	<b>30</b> 3000K	<b>1</b> 0-10V
		<b>Max.13W</b>	1300lm	<b>H</b> Chrome		<b>36</b> 36°	<b>35</b> 3500K	<b>D</b> DALI
							<b>40</b> 4000K	<b>T</b> TRIAC
							<b>C</b> CASAMBI	

# OT-L

Adjustable Recessed

Adjustable Recessed

## Body

Available in AC 220 integrated, 48V magnetic, surface mounted and suspended, a wide range of solutions with light sources and optics for all your lighting needs.

Special back cover construction, can be adjusted 200 times without loosening, perfect proportions.

## Finish

Powder coated finish in matt white (W), matt black (B), and chrome (H)

## Driver

Supplied with non-dimmable remote driver.  
Driver unit exceeds luminaire aperture; install above ceiling using extension cable.  
Dimming Options: ON/OFF | 0-10V | DALI | TRIAC | CASAMBI.  
220-240V 50/60Hz.

## Accessories

N/A

## Applications

Mainly used in high-end commercial space (clothing shops, furniture shops and other brand boutiques, car displays, jewelry, star hotels, highend clubs, museums, chain stores, brand sales halls, professional windows, counters and other accent lighting places).

## Optic


Lens.  
Beam Angle: 15° / 24° / 36° / 50°

## LED Sources

Light source options: High-power LED or COB LED.  
CRI: 95 or 97 | CCT: 2700K / 3000K / 3500K / 4000K.  
Additional CRI and CCT options available upon request.

# OT-L Ø35 | Ø60 | Ø80

## Adjustable Recessed






Ø45mm



Ø45mm




Ø45mm

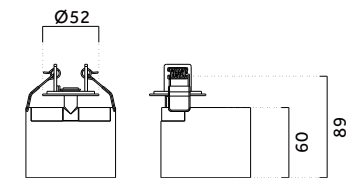


Ø45



Ø60



Ø80




Ø45mm

Code ordering example:  $\underline{\quad}$  \* \* .  $\underline{4550}$  . \* \* \* \* \* \* \* \* \* \* (Max.5W)  $\underline{\quad}$  \* \* .  $\underline{6055}$  . \* \* \* \* \* \* \* \* \* \* (Max.8.5W)  
 $\underline{\quad}$  \* \* .  $\underline{8060}$  . \* \* \* \* \* \* \* \* \* \* (Max.13W)


	Product code	LED Power	Delivered Lumen	Finish	Cup	Beam Angle (BA°)	CCT Options	Dimming Options
OT-L	<b>03</b> Trim	<b>Max.5W</b>	500lm	<b>W</b> White	<b>W</b> White	<b>15</b> 15°	<b>27</b> 2700K	<b>0</b> ON/OFF
Round		<b>Max.8.5W</b>	850lm	<b>B</b> Black	<b>B</b> Black	<b>24</b> 24°	<b>30</b> 3000K	<b>1</b> 0-10V
Adjustable		<b>Max.13W</b>	1300lm	<b>H</b> Chrome		<b>36</b> 36°	<b>35</b> 3500K	<b>D</b> DALI
				<b>C</b> Copper		<b>50</b> 50°	<b>40</b> 4000K	<b>T</b> TRIAC
								<b>C</b> CASAMBI

## Installation Schemes

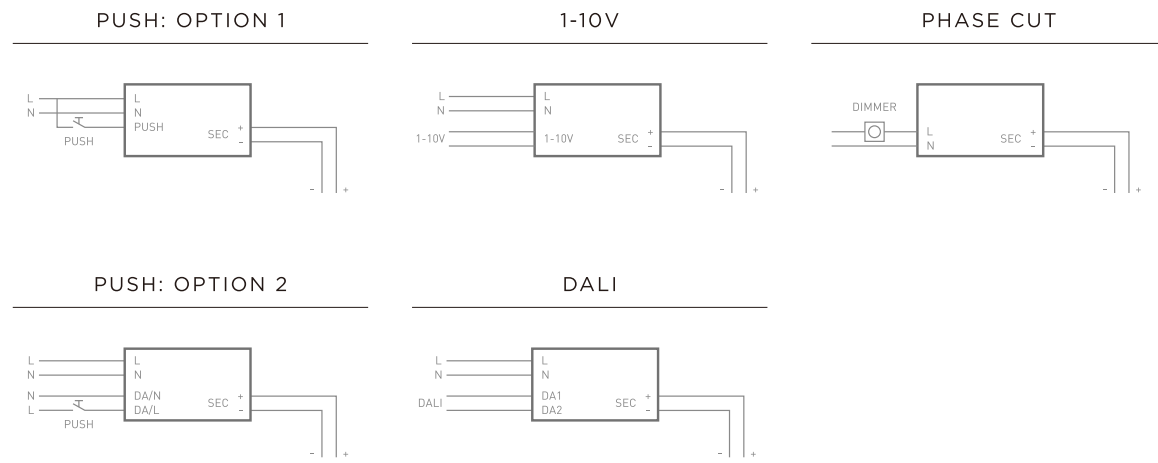


## Connection Tips

SEVERAL FIXTURES CONNECTION TO A SINGLE CONSTANT CURRENT DRIVER

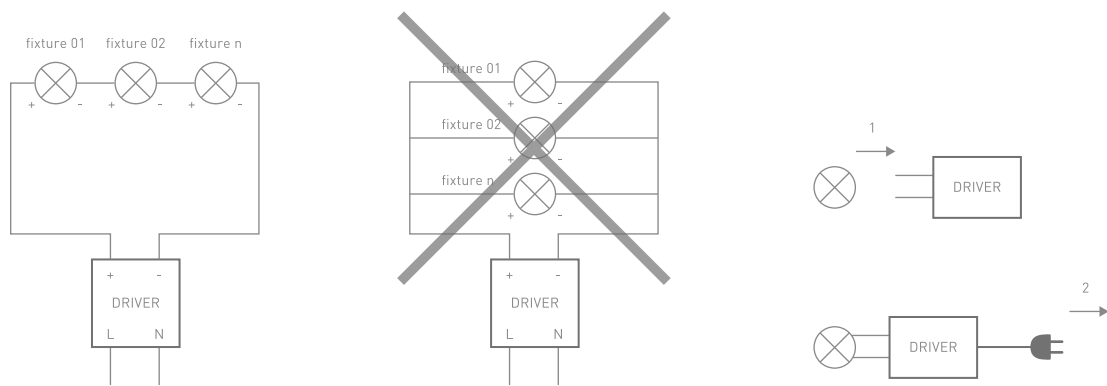

## Trimless Mounting

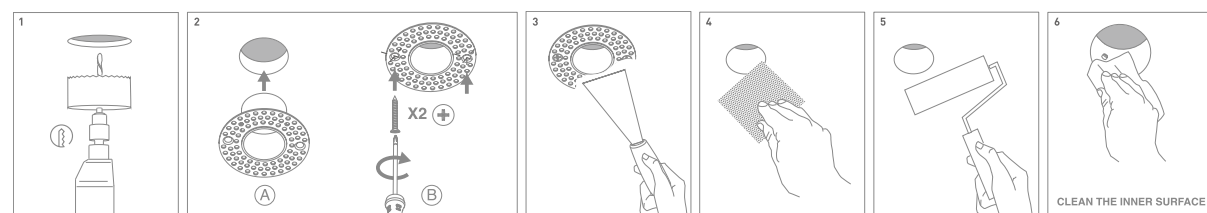

Publication date: December 2025

©Copyright OBT Lighting

Thanks to all contributors for the realization of this catalogue.

Designed by the Graphic Design Department of OBT Lighting.

No part of this catalogue may be reproduced without the written authorization of OBT Lighting.



## OBT LIGHTING LIMITED

Unit G1 Capital House 61  
Amhurst Road, London,  
United Kingdom, E8 1LL  
Hotline : 400 090 2289  
Email : [obt@obt.ltd](mailto:obt@obt.ltd)

[www.obt.ltd](http://www.obt.ltd)

Office 5, 8/F, Mega Cube,  
8 Wang Kwong Road, Kowloon  
Bay, Kowloon, Hong Kong  
Hotline : 400 090 2289  
Email : [obt@obt.ltd](mailto:obt@obt.ltd)

[www.obt.ltd](http://www.obt.ltd)



Floor 2, No. 979, Yunhan  
Road, Lingang New District,  
China (Shanghai) pilot Free  
Trade Zone  
Hotline : 400 090 2289  
Email : [obt@obt.ltd](mailto:obt@obt.ltd)

[www.obt.ltd](http://www.obt.ltd)

Room 201, building 3, No. 67,  
Luoja Nanyue street, Dalong  
street, Panyu District,  
Guangzhou  
Hotline : 400 090 2289  
Email : [obt@obt.ltd](mailto:obt@obt.ltd)

[www.obt.ltd](http://www.obt.ltd)