


Scout Series

light set them
into motion

lights that change
everything



2019/06/18

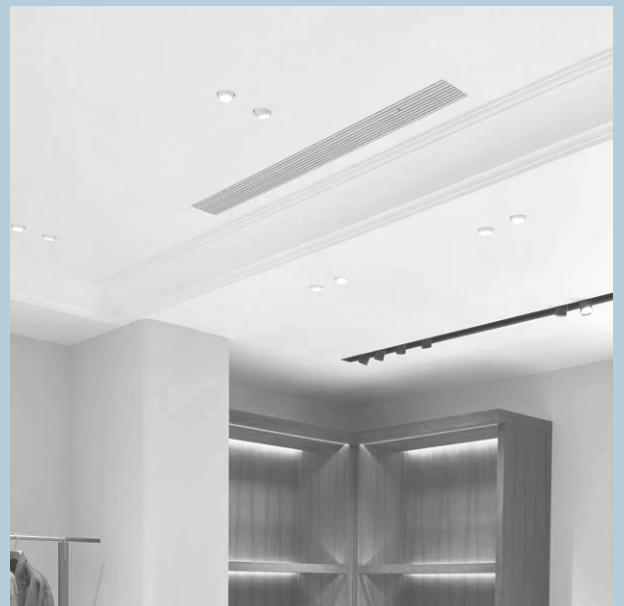

Edge forms system Spotlight units
are mounted on the top or side
of channel interior.


Scout Track



Slotting And Fixing Diagram



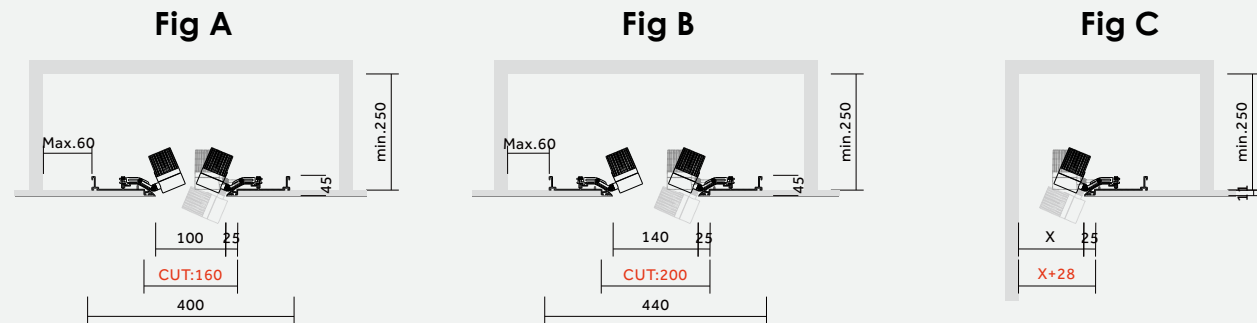
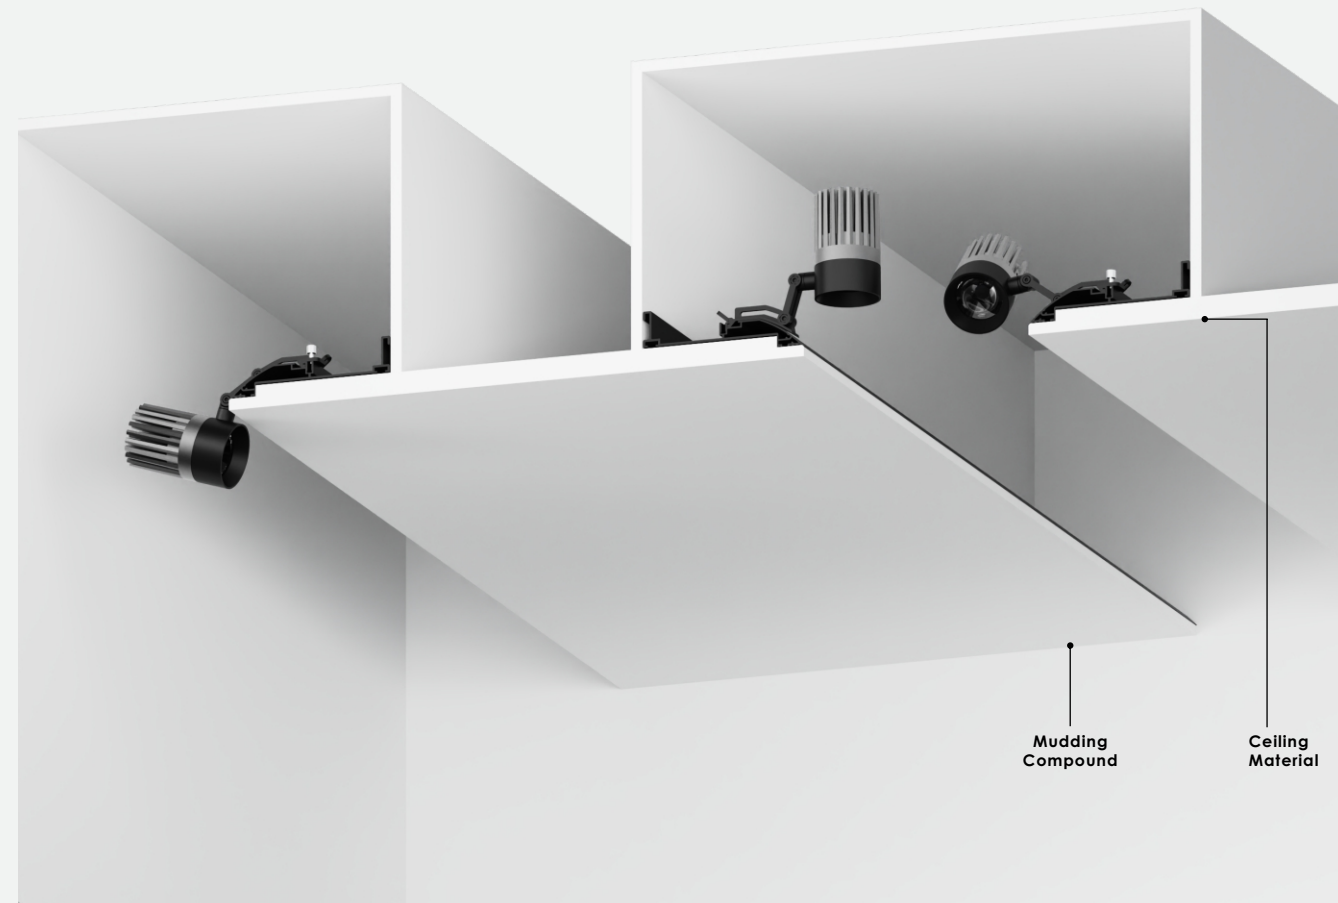






Scout Configuration

Profile And Corner Specifications

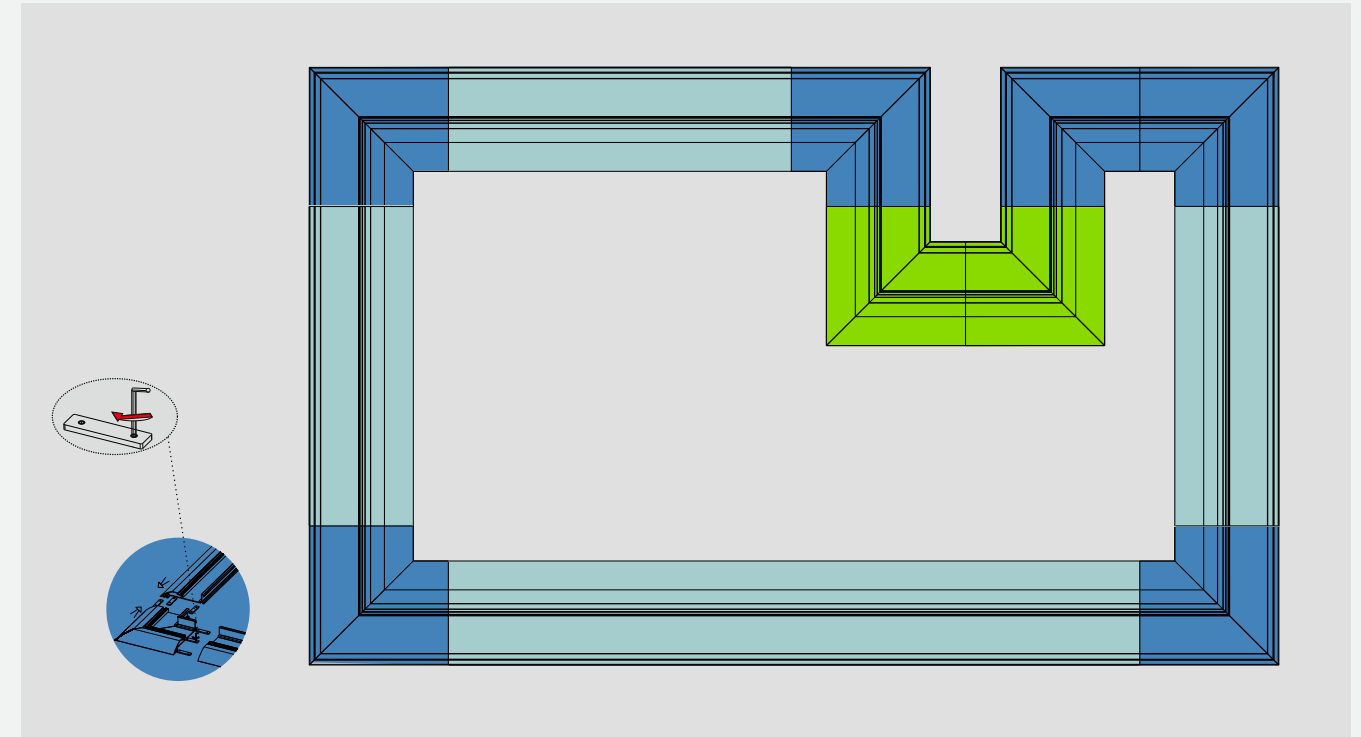

Profile Specification	TRACK LENGTH	White	Black
	500mm	24.0500.WH	24.0500.BK
	1000mm	24.1000.WH	24.1000.BK
	2000mm	24.2000.WH	24.2000.BK

90° Inner Corner Specification	Double Inner Corner Specifications
	
24.00B0.BK	24.00D0.BK
	

90° Outer Corner Specification	Double Outer Corner Specifications
	
24.00C0.BK	24.00E0.BK
	

Scout

Adjustable Recessed



Front to back is circulation structure, good heat dissipation, longer life. Different optical accessories are available to meet the needs of different designers and spaces.

Optic

Lens:
Beam Angle: 15° / 24° / 36°

LED Sources

Light source options: High power LED or COB LED.
CRI: 95 or 97 | CCT: 2700K / 3000K / 3500K / 4000K.
Additional CRI and CCT options available upon request.

Finish



Powder coated finish in white (W), black (B).

Applications

Mainly used for the need to open the slotted, to realize the lights do not see the fixture of the high-end commercial space.

Scout

Track Mounted Luminaire

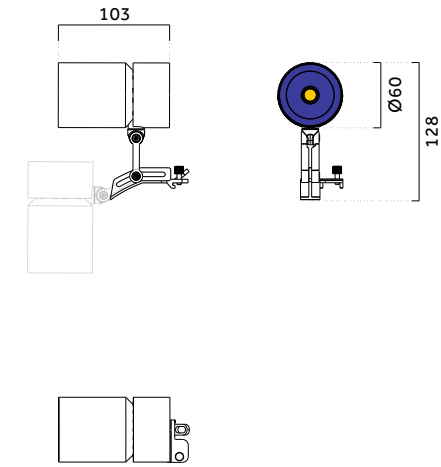

Code ordering example: * * . 6 0 0 1 . * * * * * *



	Product code	LED Power	Delivered Lumen	Finish	Cup	Beam Angle (BA°)	CCT Options	Dimming Options
Scout	20 220V	Max.15W	1350lm	W White	W White	15 15°	27 2700K	0 ON/OFF
3 Phase Track				B Black	B Black	24 24°	30 3000K	1 0-10V
4 Phase Track						36 36°	35 3500K 40 4000K	D DALI T TRIAC C CASAMBI

Scout

Track Mounted Luminaire



Scout Track Mounted Luminaire

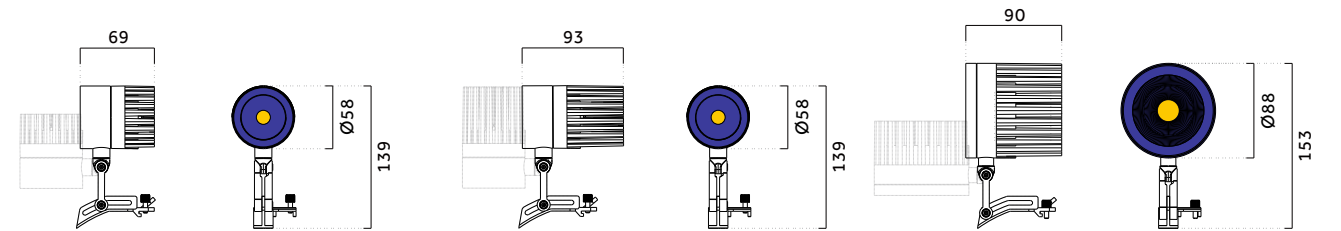



Code ordering example: $\underline{\quad}$ $\underline{\quad}$. $\underline{6}$ $\underline{0}$ $\underline{2}$ $\underline{0}$. $\underline{\quad}$ $\underline{\quad}$ $\underline{\quad}$ $\underline{\quad}$ $\underline{\quad}$ $\underline{\quad}$ $\underline{\quad}$ $\underline{\quad}$ (Max.12W) $\underline{\quad}$ $\underline{\quad}$. $\underline{8}$ $\underline{8}$ $\underline{0}$ $\underline{1}$. $\underline{\quad}$ $\underline{\quad}$ $\underline{\quad}$ $\underline{\quad}$ $\underline{\quad}$ $\underline{\quad}$ $\underline{\quad}$ $\underline{\quad}$ (Max.30W)
 $\underline{\quad}$ $\underline{\quad}$. $\underline{6}$ $\underline{0}$ $\underline{3}$ $\underline{0}$. $\underline{\quad}$ $\underline{\quad}$ $\underline{\quad}$ $\underline{\quad}$ $\underline{\quad}$ $\underline{\quad}$ $\underline{\quad}$ $\underline{\quad}$ (Max.15W)

	Product code	LED Power	Delivered Lumen	Finish	Cup	Beam Angle (BA°)	CCT Options	Dimming Options
Scout	20 220V	Max.12W	1200lm	W White	W White	15 15°	27 2700K	0 ON/OFF
3 Phase Track		Max.15W	1500lm	B Black	B Black	24 24°	30 3000K	1 0-10V
4 Phase Track		Max.30W	3000lm			36 36°	35 3500K 40 4000K	D DALI T TRIAC C CASAMBI

Scout Track


Slotting And Fixing Diagram

Top view

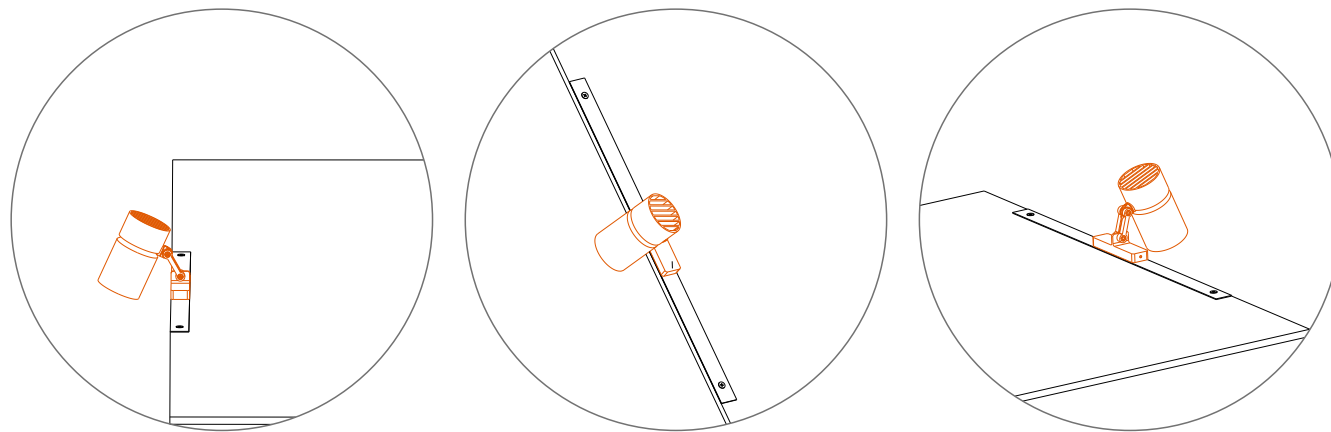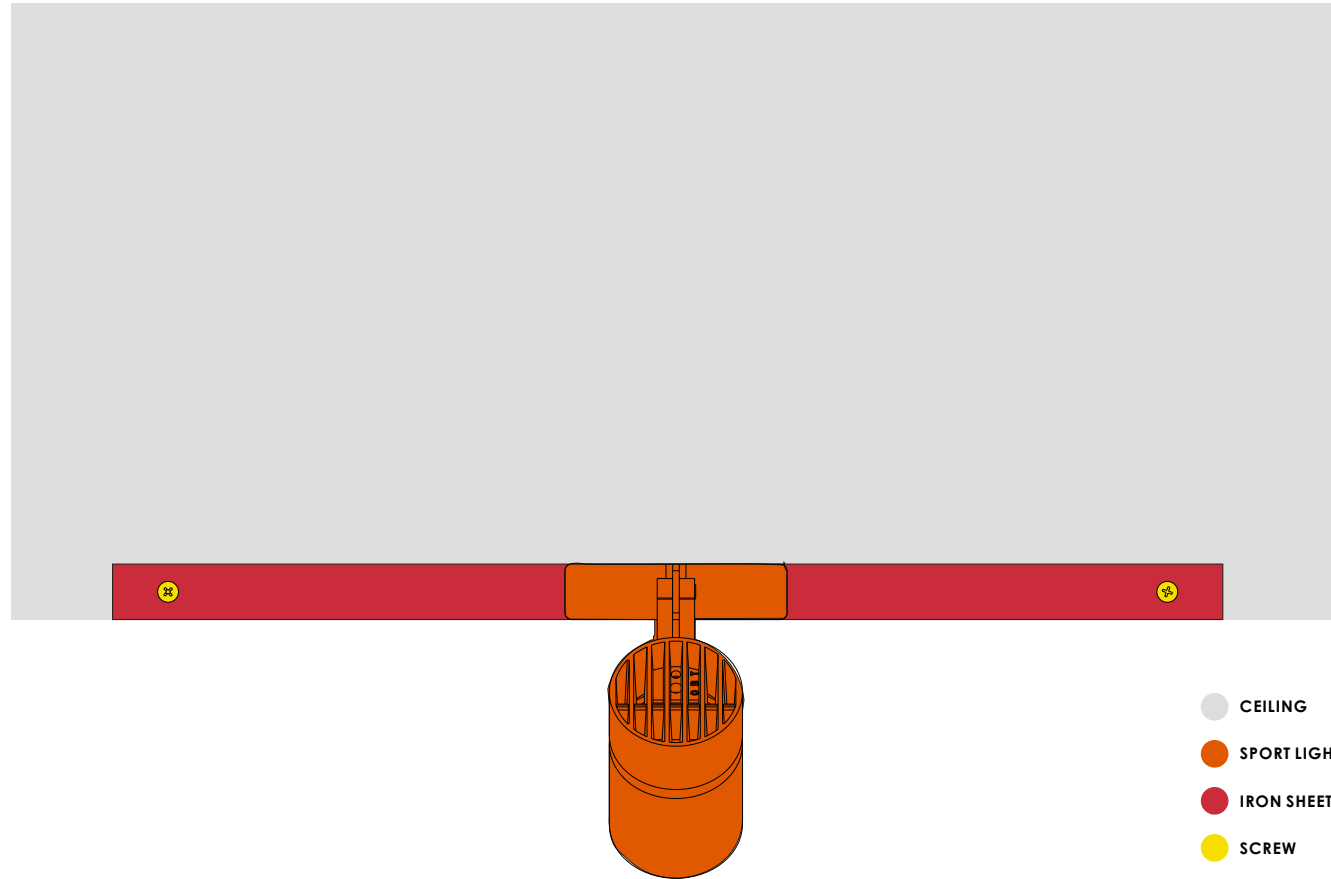

After fixing the iron sheet, the magnetic suction lamp is installed on the iron sheet .

Scout Track Mounted Luminaire

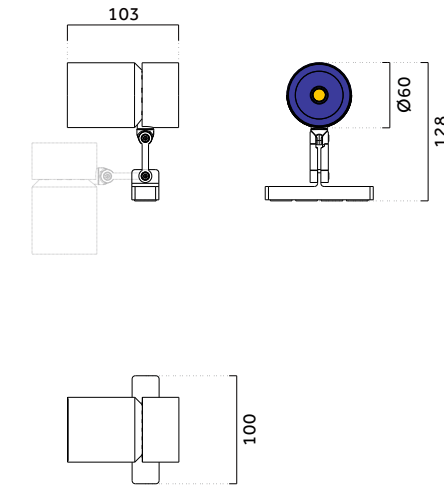

Code ordering example: * * . 6 0 1 2 . * * * * * *






	Product code	LED Power	Delivered Lumen	Finish	Cup	Beam Angle (BA°)	CCT Options	Dimming Options
Scout	20 220V	Max.15W	1350lm	W White	W White	15 15°	27 2700K	0 ON/OFF
Magnetic				B Black	B Black	24 24°	30 3000K	1 0-10V
						36 36°	35 3500K	D DALI
							40 4000K	T TRIAC C CASAMBI

Scout

Track Mounted Luminaire




Scout Track Mounted Luminaire

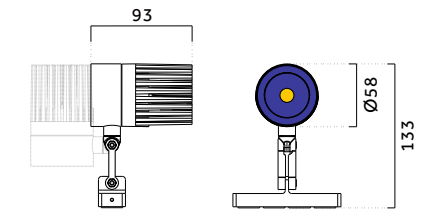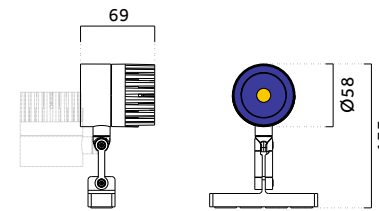

Code ordering example: $\underline{\quad}$ $\underline{\quad}$. $\underline{6}$ $\underline{0}$ $\underline{0}$ $\underline{1}$. $\underline{\quad}$ $\underline{\quad}$ $\underline{\quad}$ $\underline{\quad}$ $\underline{\quad}$ $\underline{\quad}$ $\underline{\quad}$ $\underline{\quad}$ $\underline{\quad}$ $\underline{\quad}$ (Max.12W) $\underline{\quad}$ $\underline{\quad}$. $\underline{8}$ $\underline{8}$ $\underline{0}$ $\underline{2}$. $\underline{\quad}$ $\underline{\quad}$ $\underline{\quad}$ $\underline{\quad}$ $\underline{\quad}$ $\underline{\quad}$ $\underline{\quad}$ $\underline{\quad}$ $\underline{\quad}$ $\underline{\quad}$ (Max.15W)


	Product code	LED Power	Delivered Lumen	Finish	Cup	Beam Angle (BA°)	CCT Options	Dimming Options
Scout	20 220V	Max.12W	1200lm	W White	W White	15 15°	27 2700K	0 ON/OFF
Magnetic		Max.15W	1500lm	B Black	B Black	24 24° 36 36°	30 3000K 35 3500K 40 4000K	1 0-10V D DALI T TRIAC C CASAMBI

Installation Schemes

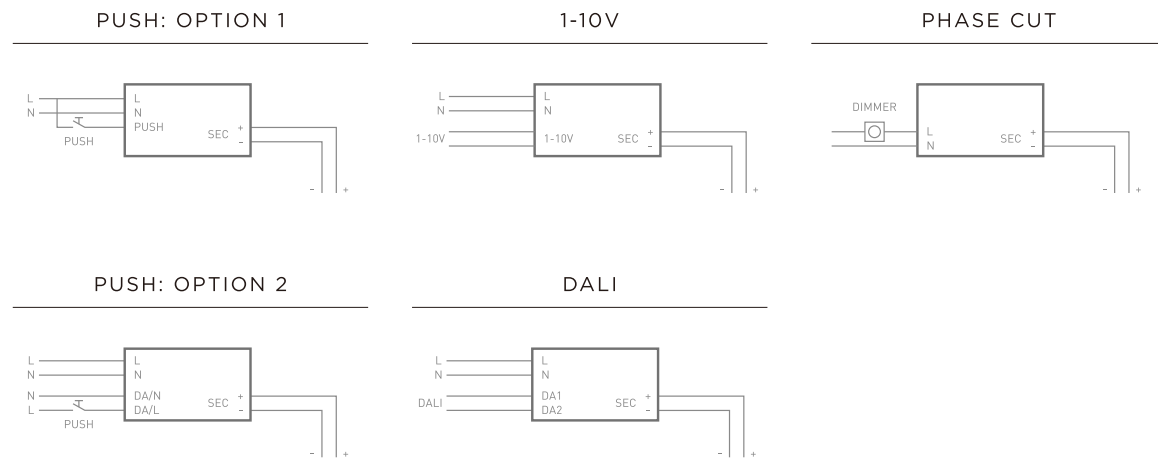


Connection Tips

SEVERAL FIXTURES CONNECTION TO A SINGLE CONSTANT CURRENT DRIVER

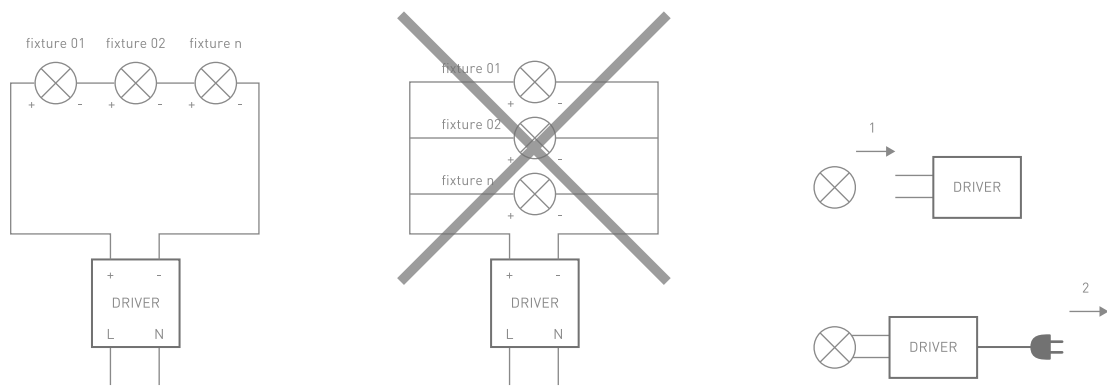

Trimless Mounting

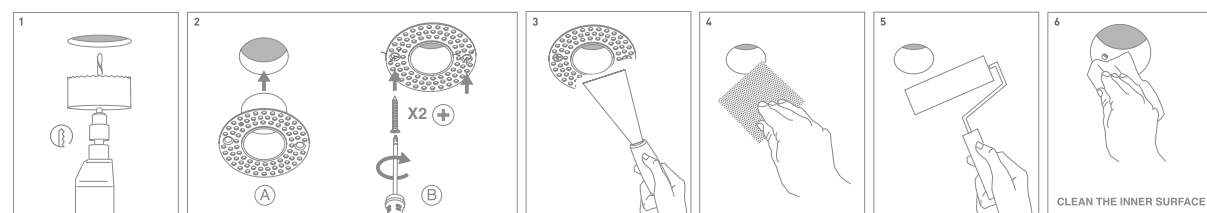

Publication date: December 2025

©Copyright OBT Lighting

Thanks to all contributors for the realization of this catalogue.

Designed by the Graphic Design Department of OBT Lighting.

No part of this catalogue may be reproduced without the written authorization of OBT Lighting.



OBT LIGHTING LIMITED

Unit G1 Capital House 61
Amhurst Road, London,
United Kingdom, E8 1LL
Hotline : 400 090 2289
Email : obt@obt.ltd

www.obt.ltd

Office 5, 8/F, Mega Cube,
8 Wang Kwong Road, Kowloon
Bay, Kowloon, Hong Kong
Hotline : 400 090 2289
Email : obt@obt.ltd

www.obt.ltd



Floor 2, No. 979, Yunhan
Road, Lingang New District,
China (Shanghai) pilot Free
Trade Zone
Hotline : 400 090 2289
Email : obt@obt.ltd

www.obt.ltd

Room 201, building 3, No. 67,
Luoja Nanyue street, Dalong
street, Panyu District,
Guangzhou
Hotline : 400 090 2289
Email : obt@obt.ltd

www.obt.ltd