

Dover is a luminaire designed at its core for wall washing applications. A minimalistic and tight design adds aesthetical dimensions to any project and enables installations close to the illuminated target.

DOVER


Dover

Wallwasher Luminaires


DOVER Series are OBT's answer for indoor linear light options with IP Rating of IP20. It has been designed for facade and similar applications. It comes with various lengths, 25mm,50mm, 300mm, 600mm, 900mm and 1200mm and beam angles 25x45°, which will meet wide range of application requirements.



Enable a precise cut off and perfect homogeneity

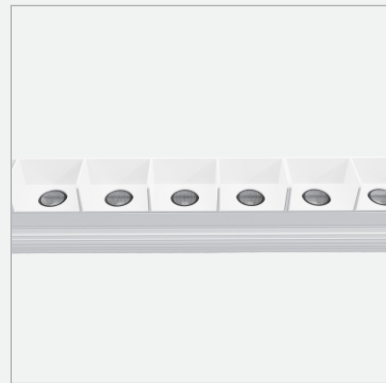



Outstanding CRI up to 90 and low glare.

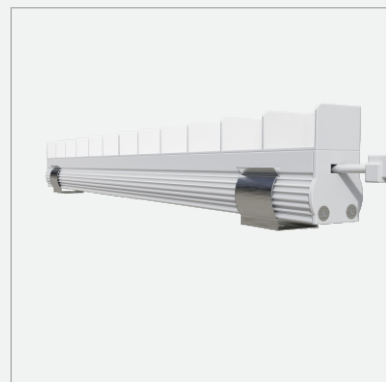

Minimally invasive (only 16 mm) and possibility to install close to the target.

Dover

Installation

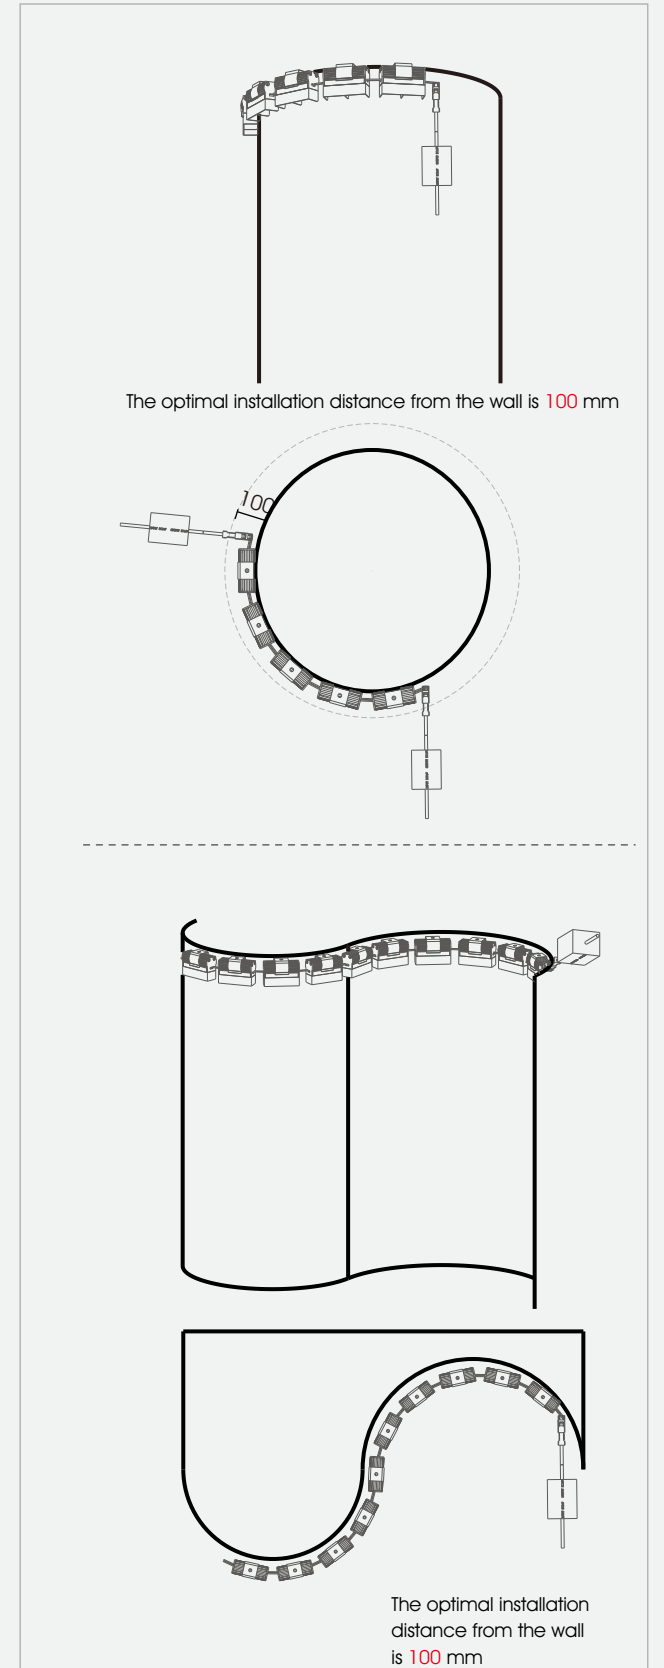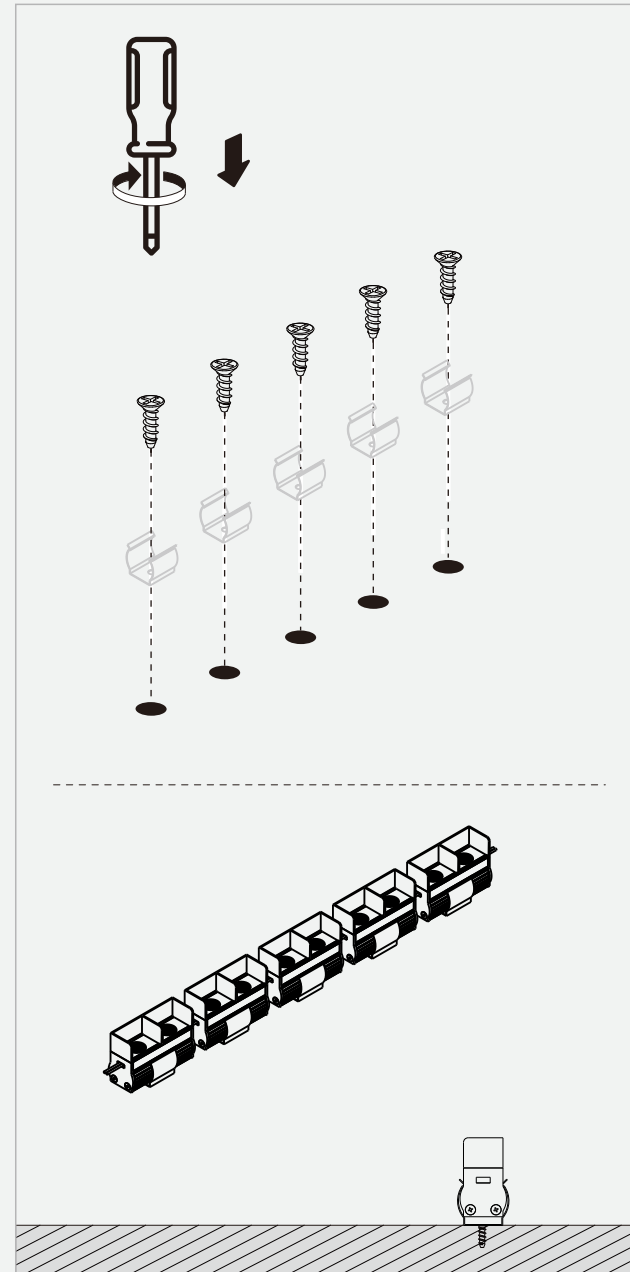

Dover

Wallwasher Luminaires

Body

Modular Linear LED System
Premium extruded aluminum construction with refined surface finishing. Offered in versatile lengths from 300 mm to 1200 mm to suit diverse applications.

Flexible 51 mm modular architecture enables adjustable sizing—compressing to 270 mm or extending to 340 mm as required.

Installation: Secure U-clip mounting system for streamlined attachment.

Optic

Lens.
Beam Angle: 25° * 45°.

LED Sources

Light source options: High-power LED or COB LED.
CRI: 95 or 97 | CCT: 3000K / 3500K / 4000K.
Additional CRI and CCT options available upon request.





Finish

Powder coated finish in matt white (W), matt black (B).



Dover

Wallwasher Luminaires

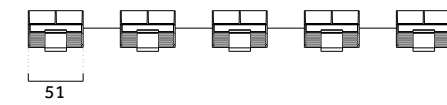

Code ordering example: * * . 1 7 0 1 . * * * * * *




	Product code	LED Power	Delivered Lumen	Finish	Cup	Beam Angle (BA°)	CCT Options	Dimming Options
Dover	55 24V	Max.5*2W	500lm	W White	W White	45 25°*45°	30 3000K	0 ON/OFF
Wallwasher				B Black	B Black		35 3500K 40 4000K	1 0-10V D DALI T TRIAC C CASAMBI

Dover

Wallwasher Luminaires




Dover Wallwasher Luminaires

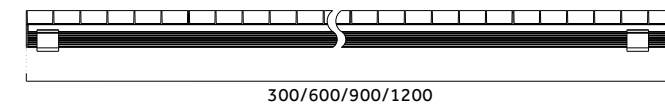

Code ordering example: $\frac{**}{**} \cdot \frac{1704}{**} \cdot \frac{*****}{**}$ (Max.6W) $\frac{**}{**} \cdot \frac{1707}{**} \cdot \frac{*****}{**}$ (Max.12W)
 $\frac{**}{**} \cdot \frac{1710}{**} \cdot \frac{*****}{**}$ (Max.18W) $\frac{**}{**} \cdot \frac{1713}{**} \cdot \frac{*****}{**}$ (Max.24W)


	Product code	LED Power	Delivered Lumen	Finish	Cup	Beam Angle (BA°)	CCT Options	Dimming Options
Dover	33 24V	Max.6W	600lm	W White	W White	45 25°*45°	30 3000K	0 ON/OFF
Wallwasher		Max.12W	1200lm	B Black	B Black		35 3500K	1 0-10V
		Max.18W	1800lm				40 4000K	D DALI
		Max.24W	2400lm					T TRIAC C CASAMBI

Installation Schemes

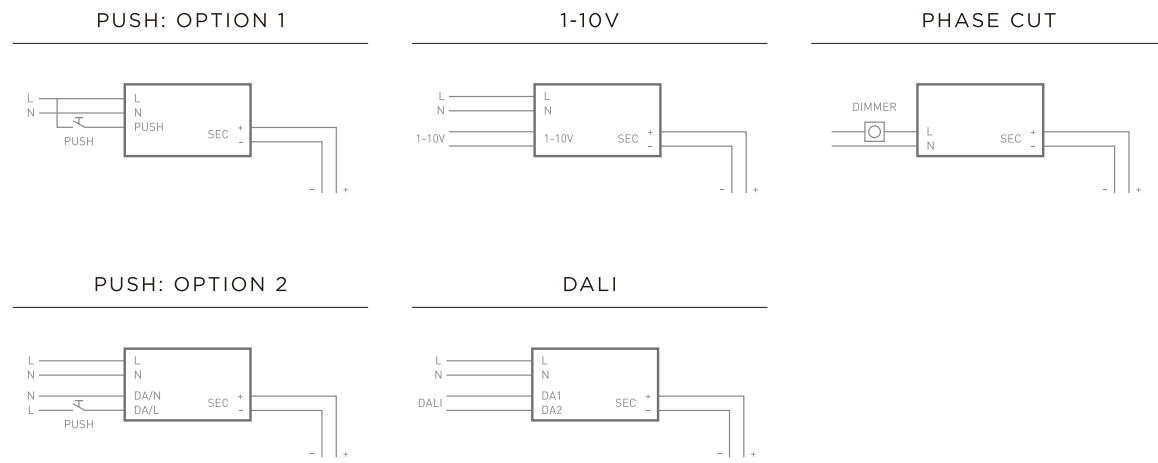


Connection Tips

SEVERAL FIXTURES CONNECTION TO A SINGLE CONSTANT CURRENT DRIVER

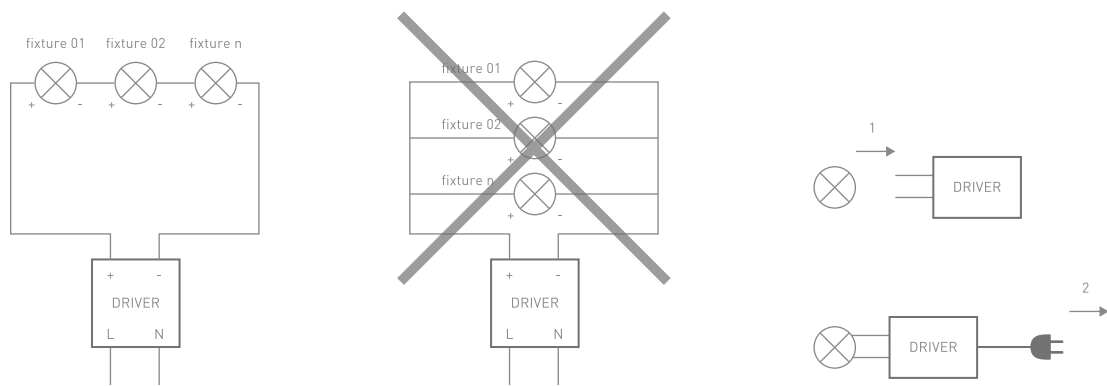

Trimless Mounting

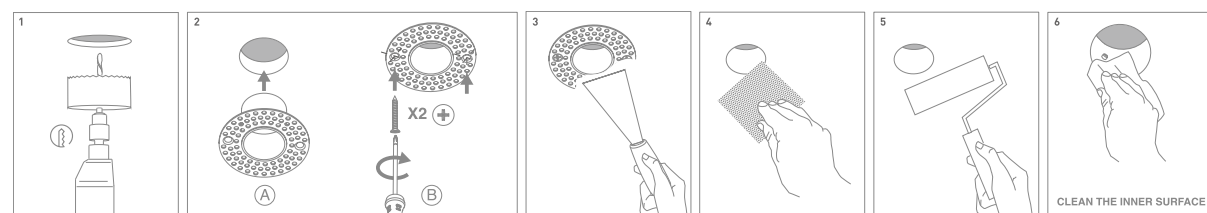

Publication date: December 2025

©Copyright OBT Lighting

Thanks to all contributors for the realization of this catalogue.

Designed by the Graphic Design Department of OBT Lighting.

No part of this catalogue may be reproduced without the written authorization of OBT Lighting.



OBT LIGHTING LIMITED

Unit G1 Capital House 61
Amhurst Road, London,
United Kingdom, E8 1LL
Hotline : 400 090 2289
Email : obt@obt.ltd

www.obt.ltd

Office 5, 8/F, Mega Cube,
8 Wang Kwong Road, Kowloon
Bay, Kowloon, Hong Kong
Hotline : 400 090 2289
Email : obt@obt.ltd

www.obt.ltd



Floor 2, No. 979, Yunhan
Road, Lingang New District,
China (Shanghai) pilot Free
Trade Zone
Hotline : 400 090 2289
Email : obt@obt.ltd

www.obt.ltd

Room 201, building 3, No. 67,
Luoja Nanyue street, Dalong
street, Panyu District,
Guangzhou
Hotline : 400 090 2289
Email : obt@obt.ltd

www.obt.ltd